



BSI Standards Publication

13 A plugs, socket-outlets, adaptors and connection units

Part 3: Adaptors – Specification

Contents

| | Page |
|---|-----------|
| Foreword | IV |
| 1 Scope | 1 |
| 2 Normative references | 1 |
| 3 Terms and definitions | 3 |
| 4 Conditions of use | 7 |
| 5 General | 7 |
| 6 General conditions for type testing | 7 |
| <i>Table 1 — Schedule of tests</i> | 8 |
| <i>Figure 5 — Gauge for plug pins</i> | 9 |
| <i>Figure 11 — GO gauge for socket-outlet</i> | 10 |
| <i>Figure 12 — Contact test gauge</i> | 11 |
| <i>Figure 14 — Non-contact test gauge</i> | 12 |
| <i>Figure 16a) — Withdrawal pull gauges for effectiveness of contact: Gauge for earthing socket contact</i> | 13 |
| 7 Classification and rating | 13 |
| 7.1 Classifications | 13 |
| 7.2 Rating | 14 |
| 8 Marking and labelling | 14 |
| <i>Table 2 — Rated current and maximum fuse rating in normal use, and load for flexing and cable grip tests related to size of flexible cable</i> | 15 |
| 9 Clearances, creepage distances and solid insulation | 16 |
| 9.1 Clearances | 17 |
| <i>Table 3 — Minimum clearances for basic insulation</i> | 18 |
| 9.2 Creepage distances | 18 |
| <i>Table 4 — Minimum creepage distances (mm) for basic insulation</i> | 19 |
| 9.3 Solid insulation | 19 |
| <i>Table 5 — Withstand voltages for insulation types</i> | 19 |
| 9.4 Requirements for printed wiring boards and equivalent construction | 20 |
| 10 Accessibility of live parts | 20 |
| <i>Figure 1 — Test pin</i> | 20 |
| <i>Figure 2a) — Apparatus for mechanical strength test on resilient covers</i> | 21 |
| <i>Figure 2b) — Hardwood block for Figure 2a)</i> | 22 |
| 11 Provision for earthing | 23 |
| 12 Terminals and terminations of intermediate adaptors and adaptor plugs | 24 |
| <i>Table 6 — Torque values for screws and nuts</i> | 25 |
| 13 Construction of adaptors (plug portion) | 26 |
| <i>Figure 4a) — Dimensions and disposition of pins</i> | 26 |
| <i>Figure 4b) — Concave shrinkage allowance for ISODs</i> | 29 |
| <i>Figure 6 — Apparatus for testing plug cover fixing screws</i> | 32 |
| <i>Figure 32a) — Apparatus for tests on adaptor pins</i> | 34 |
| <i>Figure 32b) — Apparatus for tests on adaptor plug pins</i> | 34 |
| <i>Figure 33 — Apparatus for torsion test on pins</i> | 37 |
| <i>Figure 7 — Mounting plate</i> | 38 |
| <i>Figure 8 — Plug pin deflection test apparatus for resilient adaptors</i> | 39 |
| <i>Figure 9 — Apparatus for abrasion test on insulating sleeves of plug pins</i> | 41 |
| <i>Figure 10 — Apparatus for pressure test at high temperature</i> | 42 |
| 14 Construction of adaptors (adaptor socket-outlet portion) | 43 |
| <i>Figure 3 — Disposition of socket contacts</i> | 43 |

| | | |
|----------------|---|-----------|
| | <i>Figure 13 — Test apparatus and circuit for use with contact and non contact gauges</i> | 44 |
| | <i>Figure 16b) — Withdrawal pull gauges for effectiveness of contact: Gauge for line and neutral current carrying socket contacts</i> | 46 |
| | <i>Figure 35 — Simulated plug and cable devices</i> | 48 |
| | <i>Figure 36 — Apparatus for calibration of turning moment of simulated plug</i> | 50 |
| | <i>Figure 37a) — Turning moment apparatus: Front view and side view</i> | 50 |
| | <i>Figure 37b) — Turning moment apparatus: Top view and pictorial overview</i> | 51 |
| | <i>Table 7 — Actuator test force</i> | 53 |
| 15 | Resistance to ageing and to humidity | 53 |
| 15.1 | Resistance to ageing | 53 |
| 15.2 | Resistance to humidity | 53 |
| 16 | Insulation resistance and electric strength | 54 |
| 17 | Temperature rise | 55 |
| | <i>Figure 34 — Test plug</i> | 55 |
| | <i>Table 8 — Permitted temperature rises</i> | 57 |
| | <i>Figure 17a) — Test apparatus for temperature rise test</i> | 58 |
| | <i>Figure 17b) — Dummy front plate for temperature rise test</i> | 60 |
| 18 | Breaking capacity of adaptors | 61 |
| 19 | Normal operation of adaptors | 61 |
| 20 | Connection of flexible cables and cable anchorage in intermediate adaptors and adaptor plugs | 62 |
| | <i>Figure 18 — Apparatus for flexing test</i> | 65 |
| | <i>Table 9 — Connection of flexible cables</i> | 66 |
| 21 | Mechanical strength | 66 |
| | <i>Figure 19 — Solid link for test on fuse clips</i> | 66 |
| | <i>Figure 38 — Solid links for test on fuse clips</i> | 67 |
| | <i>Figure 21a) — Pendulum impact test: General view of apparatus</i> | 68 |
| | <i>Figure 21b) — Pendulum impact test: Constructional details of striking elements</i> | 69 |
| | <i>Figure 21c) — Pendulum impact test: Constructional details of mounting support for test samples</i> | 70 |
| | <i>Figure 20 — Tumbling barrel</i> | 71 |
| 22 | Screws, current carrying parts and connections | 72 |
| 23 | Resistance to heat | 73 |
| | <i>Figure 23 — Apparatus for pressure test</i> | 74 |
| 24 | Resistance to abnormal heat and fire | 75 |
| 24.1 | General | 75 |
| 24.2 | Glow wire test | 75 |
| | <i>Table 10 — Application of glow wire test</i> | 75 |
| 25 | Resistance to excessive residual stresses and to rusting | 76 |
| 26 | (Not used) | 77 |
| 27 | Overload tests | 77 |
| Annex A | (normative) Requirements for incorporated electronic components | 79 |
| Annex B | (normative) Pollution degree | 84 |
| Annex C | (normative) Relation between rated impulse withstand voltage, rated voltage and Overvoltage Category | 85 |
| | <i>Table C.1 — Rated impulse withstand voltage for adaptors energized directly from the low voltage mains</i> | 85 |
| Annex D | (normative) Determination of the Comparative Tracking Index and Proof Tracking Index | 86 |
| Annex E | (normative) Impulse voltage test | 86 |
| | <i>Table E.1 — Test voltages for verifying clearances at sea level</i> | 87 |

| | | |
|----------------|---|------------|
| Annex F | (normative) Measurement of clearances and creepage distances | 87 |
| | <i>Table F.1 — Minimum values of width, X</i> | 87 |
| | <i>Figure F.1 — Example 1</i> | 88 |
| | <i>Figure F.2 — Example 2</i> | 88 |
| | <i>Figure F.3 — Example 3</i> | 88 |
| | <i>Figure F.4 — Example 4</i> | 89 |
| | <i>Figure F.5 — Example 5</i> | 89 |
| | <i>Figure F.6 — Example 6</i> | 89 |
| | <i>Figure F.7 — Example 7</i> | 90 |
| | <i>Figure F.8 — Example 8</i> | 90 |
| | <i>Figure F.9 — Example 9</i> | 90 |
| | <i>Figure F.10 — Example 10</i> | 91 |
| | <i>Figure F.11 — Example 11</i> | 91 |
| Annex G | (normative) Test plug for temperature rise test | 91 |
| | <i>Figure 30 — Test plug for temperature rise</i> | 92 |
| Annex H | (normative) The construction and calibration of a calibrated link | 93 |
| | <i>Figure 28 — Calibrated link</i> | 94 |
| | <i>Figure 29 — Calibration jig for calibrated link</i> | 96 |
| Annex I | (informative) Annex identification migration from 2016 edition to 2023 edition | 97 |
| | <i>Table I.1 — BS 1363 annex identification migration from 2016 to 2023</i> | 98 |
| | Bibliography | 100 |

Summary of pages

This document comprises a front cover, an inside front cover, pages I to VI, pages 1 to 100, an inside back cover and a back cover.

Foreword

Publishing information

This part of [BS 1363](#) is published by BSI Standards Limited, under licence from The British Standards Institution, and came into effect on 30 June 2023. It was prepared by Technical Committee PEL/23, *Electrical accessories*. A list of organizations represented on this committee can be obtained on request to the committee manager.

Supersession

This part of [BS 1363](#) supersedes [BS 1363-3:2016+A1:2018](#) which remains current and will be withdrawn on 30 June 2026.

Relationship with other publications

[BS 1363](#) is published in the following parts:

- *Part 1: Rewirable and non-rewirable 13 A fused plugs – Specification;*
- *Part 2: 13 A switched and unswitched socket-outlets – Specification;*
- *Part 3: Adaptors – Specification;*
- *Part 4: 13 A fused connection units: switched and unswitched – Specification;*
- *Part 5: Fused conversion plugs – Specification.*

Information about this document

This is a full revision of the document, and introduces the following principal changes:

- the Scope now covers operating frequencies from 50 Hz to 60 Hz;
- current carrying parts made of brass are required to have a minimum content of 58% copper;
- the requirements governing voltage and current ratings of adaptors incorporating electronic components have changed;
- new adaptor requirements have been added for the maximum number of socket-outlets on the same plane;
- Annex requirements for incorporated electronic components have been modified, specifically, USB circuits intended for charging portable devices with the addition of the abnormal condition.

The numbering of figures within this standard remains as in the previous version; however, future revisions will implement consecutive numbering throughout.

[Annex I](#) gives details of the annex renumbering from the 2016 editions of [BS 1363](#), Part 1 to Part 5 to the 2023 editions.

This publication can be withdrawn, revised, partially superseded or superseded. Information regarding the status of this publication can be found in the Standards Catalogue on the BSI website at bsigroup.com/standards, or by contacting the Customer Services team.

Where websites and webpages have been cited, they are provided for ease of reference and are correct at the time of publication. The location of a webpage or website, or its contents, cannot be guaranteed.

Presentational conventions

The provisions of this standard are presented in roman (i.e. upright) type. Its requirements are expressed in sentences in which the principal auxiliary verb is “shall”.

Commentary, explanation and general informative material is presented in smaller italic type, and does not constitute a normative element.

Requirements in this standard are drafted in accordance with the *Rules for the structure and drafting of UK standards:2022*, subclause **G.1.1**, which states, “Requirements should be expressed using wording such as: ‘When tested as described in Annex A, the product shall ...’”. This means that only those products that are capable of passing the specified test will be deemed to conform to this standard.

Where words have alternative spellings, the preferred spelling of the Shorter Oxford English Dictionary is used (e.g. “organization” rather than “organisation”).

Contractual and legal considerations

This publication has been prepared in good faith, however no representation, warranty, assurance or undertaking (express or implied) is or will be made, and no responsibility or liability is or will be accepted by BSI in relation to the adequacy, accuracy, completeness or reasonableness of this publication. All and any such responsibility and liability is expressly disclaimed to the full extent permitted by the law.

This publication is provided as is, and is to be used at the recipient’s own risk.

The recipient is advised to consider seeking professional guidance with respect to its use of this publication.

This publication is not intended to constitute a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

In particular, attention is drawn to the following specific regulations:

- The Plugs and Sockets etc. (Safety) Regulations 1994. SI No. 1768 [1].

1 Scope

This part of [BS 1363](#) specifies requirements for adaptors having insulating sleeves on the line and neutral plug pins and suitable for use with socket-outlets conforming to BS 1363-2:2023, with particular reference to safety in normal use. Adaptors specified in this part of [BS 1363](#) are intended for household, commercial and light industrial purposes. The adaptors are suitable for the connection of portable appliances, sound vision equipment, luminaires, etc., in a.c. circuits only, operating at voltages not exceeding 250 V r.m.s. and frequencies from 50 Hz to 60 Hz. Adaptors incorporating electronic components detailed in [Annex A](#) are included within this part of [BS 1363](#).

This standard also applies to shaver adaptors which have the earth pin replaced with a similarly dimensioned protrusion made of insulating material designated as an insulated shutter opening device (ISOD) designed to operate the shutter mechanism of a socket-outlet conforming to BS 1363-2:2023.

Adaptors conforming to this standard are shuttered and therefore do not require the use of additional means to shield the current carrying contacts when no plug is present in the adaptor socket-outlets.

Assemblies comprising a plug and one or more portable socket-outlets connected together by a flexible cable are not considered to be adaptors according to this part of [BS 1363](#).

An adaptor is mechanical by nature of construction. The product is therefore immune from electromagnetic interference.

An adaptor that does not incorporate electronic devices does not emit intolerable electromagnetic interference, since significant electromagnetic disturbances are only generated during insertion and withdrawal which are not continuous.

This British Standard does not cover devices within the scope of the following standards:

- a) BS EN IEC 62368 series (direct plug-in devices);
- b) BS EN IEC 60730 series; or
- c) [BS 8546](#).

NOTE In order to maintain safety and interchangeability with plugs and socket-outlets, it is necessary that these products conform to the requirements of [Clause 10](#), [Clause 13](#) and [Clause 14](#), however their body outline need not be limited at a distance of 6.35 mm from the plug engagement surface.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes provisions, or limits the application, of this document¹⁾. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

[BS 546:1950](#), *Specification – Two-pole and earthing-pin plugs, socket-outlets and socket-outlet adaptors*

[BS 646:1958+A2:2013](#), *Specification for cartridge fuse-links (rated up to 5 amperes) for a.c. and d.c. service*

[BS 1362:1973+A3:2021](#), *General purpose fuse links for domestic and similar purposes (primarily for use in plugs) – Specification*

[BS 1363-1:2023](#), *13 A plugs, socket-outlets, adaptors and connection units – Part 1: Rewirable and non-rewirable 13 A fused plugs – Specification*

¹⁾ Documents that are referred to solely in an informative manner are listed in the Bibliography.

- BS 1363-2:2023, *13 A plugs, socket-outlets, adaptors and connection units – Part 2: 13 A switched and unswitched socket-outlets – Specification*
- [BS 2572](#), *Specification for phenolic laminated sheet and epoxy cotton fabric laminated sheet*
- BS 4573:1970+A5:2016, *Specification for 2-pin reversible plugs and shaver socket-outlets*
- BS 4662:2006+A1:2009, *Boxes for flush mounting of electrical accessories – Requirements, test methods and dimensions*
- [BS 6004:2012+A1:2020](#), *Electric cables – PVC insulated and PVC sheathed cables for voltages up to and including 300/500 V, for electric power and lighting*
- [BS EN 1652](#), *Copper and copper alloys – Plate, sheet, strip and circles for general purposes*
- [BS EN 50075:1991](#), *Specification for flat non-wirable two-pole plugs 2.5 A 250 V, with cord, for the connection of class II-equipment for household and similar purposes*
- [BS EN 50525-2-11:2011](#), *Electric cables – Low voltage energy cables of rated voltages up to and including 450/750 V (U₀/U) – Part 2-11: Cables for general applications – Flexible cables with thermoplastic PVC insulation*
- [BS EN 50525-2-21:2011](#), *Electric cables – Low voltage energy cables of rated voltages up to and including 450/750 V (U₀/U) – Part 2-21: Cables for general applications – Flexible cables with crosslinked elastomeric insulation*
- [BS EN 50525-2-22:2011](#), *Electric cables – Low voltage energy cables of rated voltages up to and including 450/750 V (U₀/U) – Part 2-22: Cables for general applications – High flexibility braided cables with crosslinked elastomeric insulation*
- [BS EN 50525-2-71:2011](#), *Electric cables – Low voltage energy cables of rated voltages up to and including 450/750 V (U₀/U) – Part 2-71: Cables for general applications – Flat tinsel cables (cords) with thermoplastic PVC insulation*
- [BS EN 60664-3](#), *Insulation coordination for equipment within low-voltage systems – Part 3: Use of coating, potting or moulding for protection against pollution (IEC 60664-3:2016)*
- [BS EN 60664-5](#), *Insulation coordination for equipment within low-voltage systems – Part 5: Comprehensive method for determining clearances and creepage distances equal to or less than 2 mm*
- [BS EN 60669-2-1](#), *Switches for household and similar fixed electrical installations – Part 2-1: Particular requirements – Electronic switches*
- [BS EN 60695-10-2:2014](#), *Fire hazard testing – Part 10-2: Abnormal heat – Ball pressure test method*
- [BS EN 61032:1998](#), *Protection of persons and equipment by enclosures – Probes for verification*
- [BS EN 61180:2016](#), *High-voltage test techniques for low-voltage equipment – Definitions, test and procedure requirements, test equipment*
- [BS EN 61558-2-6](#), *Safety of transformers, reactors, power supply units and similar products for supply voltages up to 1 100 V – Part 2-6: Particular requirements and tests for safety isolating transformers and power supply units incorporating safety isolating transformers*
- [BS EN 61558-2-16](#), *Safety of transformers, reactors, power supply units and similar products for supply voltages up to 1 100 V – Part 2-16: Particular requirements and tests for switch mode power supply units and transformers for switch mode power supply units*
- [BS EN 61643-311](#), *Components for low-voltage surge protective devices – Part 311: Performance requirements and test circuits for gas discharge tubes (GDT)*
- [BS EN 61643-321](#), *Low voltage surge protective devices – Part 321: Specifications for avalanche breakdown diode (ABD)*

[BS EN IEC 60112:2020](#), *Method for the determination of the proof and the comparative tracking indices of solid insulating materials*

[BS EN IEC 60695-2-11:2021](#), *Fire hazard testing – Part 2-11: Glowing/hot-wire based test methods – Glow-wire flammability test method for end-products (GWEPT)*

[BS EN IEC 61000-6-1](#), *Electromagnetic compatibility (EMC) – Generic standards – Part 6-1: Immunity standard for residential, commercial and light-industrial environments*

[BS EN IEC 61000-6-3](#), *Electromagnetic compatibility (EMC) – Part 6-3: Generic standards – Emission standard for equipment in residential environments*

[BS EN IEC 61051-2:2021](#), *Varistors for use in electronic equipment – Part 2: Sectional specification for surge suppression varistors*

[BS EN IEC 61643-331](#), *Components for low-voltage surge protection – Part 331: Performance requirements and test methods for metal oxide varistors (MOV)*

[BS EN IEC 62368-1](#), *Audio/video, information and communication technology equipment – Part 1: Safety requirements*

[BS EN ISO 9453:2020](#), *Soft solder alloys – Chemical compositions and forms*

[IEC/TR 60083:2015](#), *Plugs and socket-outlets for domestic and similar general use standardized in member countries of IEC*

3 Terms and definitions

For the purposes of this part of [BS 1363](#) the following terms and definitions apply.

NOTE Where the terms voltage and current are used, they imply r.m.s. values, unless otherwise stated.

3.1 accessible external surface of an adaptor

surface that can be touched by test probe B specified in [BS EN 61032:1998](#) when the adaptor is in full engagement with the corresponding socket-outlet without any plugs being in engagement with the adaptor

3.2 actuating member

part which is moved, e.g. pulled, pushed or turned by the user, to operate the switch mechanism of a switched adaptor

3.3 adaptor

portable accessory having plug pins, intended to engage with the contacts of a [BS 1363](#) socket-outlet, and having socket-outlet contacts to accommodate one or more plugs of [BS 1363-1:2023](#) or [BS 546:1950](#) type

3.4 adaptor plug

fused adaptor having one or more socket-outlets and provision for the connection of a flexible cable to a portable appliance, in parallel with the socket-outlet

3.5 adaptor socket-outlet

set of contacts for forming part of an adaptor and designed to engage with the pins of a corresponding plug

3.6 basic insulation

insulation applied to live parts to provide basic protection against electric shock

NOTE Basic insulation does not necessarily include insulation used exclusively for functional purposes.

3.7 calibrated link

calibrated heat source for use in place of a fuse link during temperature rise tests

3.8 class I

method of protection against electric shock which does not rely on basic insulation only, but which includes means for the connection of exposed conductive parts to a protective conductor in the fixed wiring of the installation

3.9 class II

method of protection against electric shock which does not rely on basic insulation only, but in which additional safety precautions, such as double insulation or reinforced insulation are provided, there being no provision for protective earthing or reliance upon installation conditions

NOTE 1 Such a method may be one of the following.

- a) Equipment having double and substantially continuous enclosure of insulation material which envelopes all metal parts with the exception of small parts such as name plates, screws and rivets which are isolated from live parts by insulation at least equivalent to reinforced insulation. Such equipment is called "insulated encased class II equipment".*
- b) Equipment having a substantially continuous enclosure of metal, in which double insulation is used throughout, except for those parts where reinforced insulation is used, such equipment is called "metal encased class II equipment".*
- c) Equipment that is a combination of types a) and b).*

NOTE 2 The enclosure of an insulation encased class II appliance may form a part or whole of the supplementary insulation, or reinforced insulation.

NOTE 3 If an appliance with double insulation and/or reinforced insulation throughout has an earthing terminal or an earthing contact, it is of class I construction.

NOTE 4 Class II appliances may have parts in which protection against electric shock relies on operation at safety extra low voltage (SELV).

3.10 clearance

shortest distance in air between two conductive parts

3.11 creepage distance

shortest distance along the surface of the insulating material between two conductive parts

3.12 engagement surface of the plug portion of an adaptor

surface which is not able to be touched by test probe B specified in [BS EN 61032:1998](#) when the adaptor is in full engagement with a corresponding socket-outlet without any plugs being in engagement with the adaptor

3.13 engagement surface of the socket-outlet portion of an adaptor

surface, ignoring any raised marking, which is in contact with or directly beneath the [Figure 11](#) gauge when it is in full engagement with the socket-outlet

NOTE See [14.1](#).

3.14 fine wire thermocouple

thermocouple having wires not exceeding 0.3 mm in diameter

3.15 functional insulation

insulation between conductive parts which is necessary only for the proper functioning of the equipment

3.16 fuse carrier

moveable or removable part designed to carry, retain, cover and/or remove the fuse link

3.17 fused adaptor

adaptor having a replaceable cartridge fuse link interposed between the line pin and one or more line socket contacts

3.18 indicator lamp (pilot lamp)

lamp or similar device which illuminates to indicate that the adaptor is energized

3.19 insignificant mass

insufficient combustible mass to constitute a fire hazard

NOTE Parts of insignificant mass are usually less than 2 g.

3.20 insulated shutter opening device (ISOD)

protrusion from the engagement surface of the adaptor, in place of a brass earth pin, made of insulating material having dimensions similar to those of a brass earth pin

3.21 intermediate adaptor

fused adaptor having one or more socket-outlets and provision for the connection of a flexible cable to a remote control device in series with the socket-outlet

3.22 live parts

current carrying parts and those metal parts in contact with them during normal use

NOTE Metal parts of the earthing circuit are not considered to be current carrying parts.

3.23 multiway adaptor

adaptor having more than one set of socket contacts

NOTE The socket contacts might or might not be of the same type or rating as the plug pin portion.

3.24 non-rewirable adaptor

adaptor as in 3.4 or 3.21, so constructed that it forms a complete unit with the flexible cable which cannot be replaced after assembly by the manufacturer of the adaptor

NOTE See also 13.7.

3.25 reinforced insulation

single insulation system applied to live parts, which provides a degree of protection against electric shock equivalent to double insulation under the conditions specified in the relevant standard

3.26 resilient material

material having the inherent capability of regaining or substantially regaining its original form when deforming loads are removed

3.27 rewirable adaptor

adaptor as in 3.4 or 3.21, so constructed to facilitate the fitting or replacing of a flexible cable using general purpose tools

3.28 screw type terminal

terminal in which the connection is made directly by means of screws or nuts of any kind or indirectly through an intermediate metal part such as a washer, clamping plate or anti spread device on which the screw bears directly

NOTE The following are examples of screw type terminals.

a) A pillar terminal is a terminal in which the conductor is inserted into a hole or cavity, where it is clamped under the shank of the screw or screws.

b) A screw terminal is a terminal in which the conductor is clamped under the head of the screw.

c) A stud terminal is a terminal in which the conductor is clamped under a nut.

3.29 shaver adaptor

fused adaptor specifically designed to have a single socket-outlet capable of accepting plugs of the following types: BS 4573; BS EN 50075; IEC TR 60083:2015, sheet US1, NEMA 1-15

3.30 shutter

movable device arranged to shield the current carrying socket-outlet contacts automatically when a corresponding plug is removed

3.31 small parts

parts where each surface lies completely within a circle of 15 mm diameter or where some of the surface lies outside the 15 mm diameter circle but in such a way that it is not possible to place a circle of 8 mm diameter on any of this remaining surface

[SOURCE: BS EN IEC 60695-2-11:2021, 3.15, modified]

NOTE More information concerning small parts can be found in BS EN IEC 60695-2-11:2021, 4.4.

3.32 supplementary insulation

independent insulation applied in addition to basic insulation, in order to provide protection against electric shock in the event of failure of basic insulation

3.33 switched adaptor

adaptor with associated switch or switches to disconnect the supply to the line socket contact or to both line and neutral socket contacts only and not for switching incorporated electronic components

3.34 terminal

means which facilitates an electrical connection between the appropriate flexible cable and the conducting parts of the adaptor without the use of special purpose tools

3.35 termination

means which facilitates an electrical connection between the appropriate flexible cable and the conducting part of the adaptor using special purpose tools, e.g. soldering, welding, crimping

3.36 type test

test or series of tests made on a type test sample, for the purpose of checking conformity of the design of a given product with the requirements of the relevant standard

3.37 type test sample

sample consisting of one or more similar units or specimens submitted by the manufacturer or responsible vendor for the purpose of a type test

4 Conditions of use

Adaptors shall be suitable for use under the following conditions:

- a) an ambient temperature in the range -5°C to $+40^{\circ}\text{C}$, the average value over 24 h not exceeding 25°C ;

NOTE Under normal conditions of use, the available cooling air is subject to natural atmospheric variations of temperature and hence the peak temperature occurs only occasionally during the hot season, and on those days when it does occur it does not persist for lengthy periods.

- b) a situation not subject to exposure to direct radiation from the sun or other source of heat likely to raise temperatures above the limits specified in a);
 - c) an altitude not exceeding 2 000 m above sea level; and
 - d) an atmosphere not subject to abnormal pollution by smoke, chemical fumes, rain spray prolonged periods of high humidity or other abnormal conditions. This is the equivalent to pollution degree 2 (see [Annex B](#)), and Overvoltage Category III (see [Annex C](#)).
-

5 General

Adaptors shall be so designed and constructed that in normal use their performance is reliable and minimizes the risk of danger to the user or to the surroundings. Such adaptors shall be capable of meeting all the relevant requirements and tests specified in this part of [BS 1363](#).

6 General conditions for type testing

6.1 All tests shall be type tests.

Unless otherwise specified in this part of [BS 1363](#), the adaptors shall be tested as delivered by the manufacturer or responsible vendor and under normal conditions of use, at an ambient temperature of $20^{\circ}\text{C} \pm 5^{\circ}\text{C}$ after being conditioned at normal laboratory temperature and humidity levels for at least four days.

The adaptors used for the tests shall be representative of normal production items in respect of all details which might affect the test results.

Non-rewirable adaptors shall be supplied with an appropriate flexible cable which shall be at least 1 m long.

Adaptors shall be deemed to conform to this part of [BS 1363](#) if no sample fails in the complete series of tests given in [Table 1](#).

Table 1 — *Schedule of tests*

| Sequence | Samples | Tests | Clause number |
|------------------|---------|--|--|
| 1 | 3 | Inspection, measurement, gauging and manipulation | 6, 7, 8, 10.1, 10.2, 10.3, 10.5, 10.6, 11.1, 12.1, 13.1, 13.2, 13.3, 13.4, 13.5, 13.6, 13.12 (13.12.1, 13.12.2, 13.12.3 and 13.12.6 only), 13.16, 13.17, 13.18, 13.19, 14.1, 14.2, 14.3, 14.4, 14.5, 14.8, 14.9, 14.10, 14.13, 20.2, 20.3, 20.4, 20.6, 9 (except Annex D), 22 |
| 2 | 3 | General | 6, 10.4, 20.1, 13.15, 13.20.2, 13.20.3, 13.20.2 |
| 3 | 3 | | 6, 21.1.2, 21.1.3, 18, 14.12.1, 21.1.4, 17 |
| 4 | 3 | | 6, 15.2, 13.11, 20.5, 13.20.4 |
| 5 | 3 | | 6, 15.1, 21.1.5, 13.10, 11.2, 13.13, 13.7, 13.8, 13.9, 13.14 |
| 6 | 3 | | 6, 15.1, 16, 14.7, 19, 14.11 |
| 7 | 3* | | 6, 13.12.4 |
| 8a) | 9 | Additional tests for adaptors with non-solid pins and/or an ISOD | 6, 13.12.5 |
| 8b) | 3 | Additional tests for adaptors fitted with an ISOD | 6, 13.12.4.3 |
| 9 | 3 | Materials | 6, 23 |
| 10 | 3 | | 6, 24.2, 9.2 (Annex D only) |
| 11 | 3 | | 6, 25 |
| 12 ^{A)} | 3 | Positive break (switched adaptors) | 6, 14.12.2 |
| 13 | 3 | Overloads | 6, 15.1, 27 |

NOTE 1 * denotes that an additional three samples will be required for adaptors with non-solid pins.

NOTE 2 The order of tests given in sequence 1 is preferred but not obligatory except where required within the text of the appropriate clause.

NOTE 3 ** denotes that additional samples might be required for adaptors incorporating electronic components.

A) An additional new set of three samples prepared with the contacts closed might be required.

If one sample fails in a complete series of tests given in [Table 1](#), then adaptors of that type shall be deemed to have failed to conform to this part of [BS 1363](#), unless the adaptor is shown to be not representative of normal production or design, in which case a further type test sample shall be submitted to the test or tests in that particular group. If there is no failure in this retest then adaptors of that type shall be deemed to conform to this part of [BS 1363](#).

If more than one sample fails in the complete series of tests given in [Table 1](#), the adaptors of that type shall be deemed not to conform to this part of [BS 1363](#).

NOTE For type testing, all tests have been included in the test schedule and should be performed in the specified order. References to carrying out specific tests in various clauses are not intended to indicate a sequence of testing different to that in the schedule and should not be conducted as separate additional tests.

- 6.2** All inspections and tests, of any one classification (see [Clause 7](#)), shall be carried out as specified in the clauses listed in [Table 1](#) on the number of samples in the sample column and in the order given.

- 6.3 Gauges in accordance with Figure 5, Figure 11, Figure 12, Figure 14, Figure 16a) and Figure 16b) shall be considered to conform to the dimensional requirements if the measured values are within the specified dimensions and the uncertainty of measurement at not less than 95% confidence level does not exceed ± 0.005 mm.

Figure 5 — Gauge for plug pins

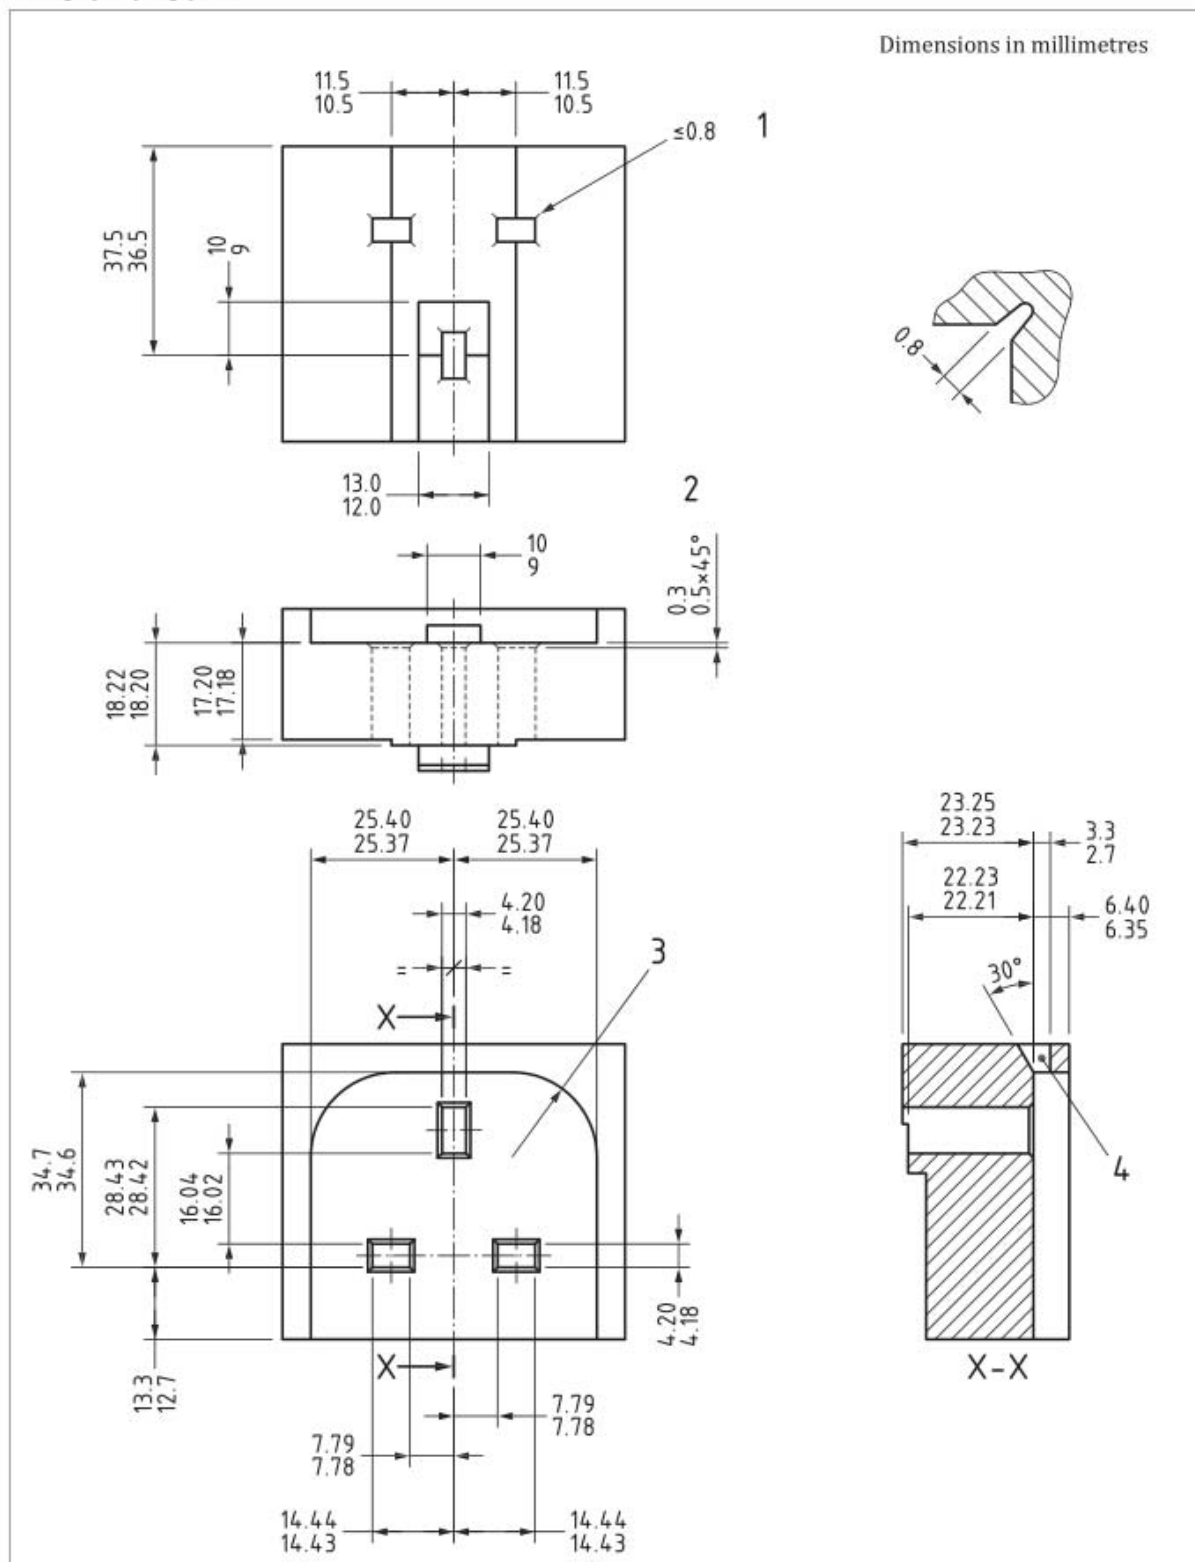


Figure 5 — Gauge for plug pins (continued)

Key

1

Corners might be relieved up to width of 0.8 as shown

2

Chamfer all round

3


Radius = 15.088 TP (true profile) with a tolerance zone 0.100 wide, ± 0.050 from the TP; the form of this contour is to blend smoothly with the sides

4


Slot optional

NOTE Gauge might be fabricated in several component parts, providing assembly is within dimensions shown.

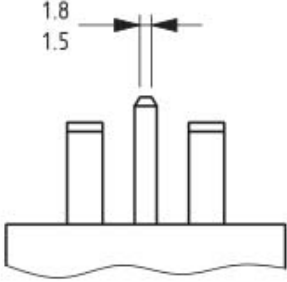Figure 11 — GO gauge for socket-outlet



| | | Dimension X | Dimension Y |
|----------------------|------|-------------|-------------|
| Pins at max. centres | Min. | 11.19 | 22.37 |
| | Max. | 11.21 | 22.39 |
| Pins at min. centres | Min. | 11.01 | 22.07 |
| | Max. | 11.03 | 22.09 |

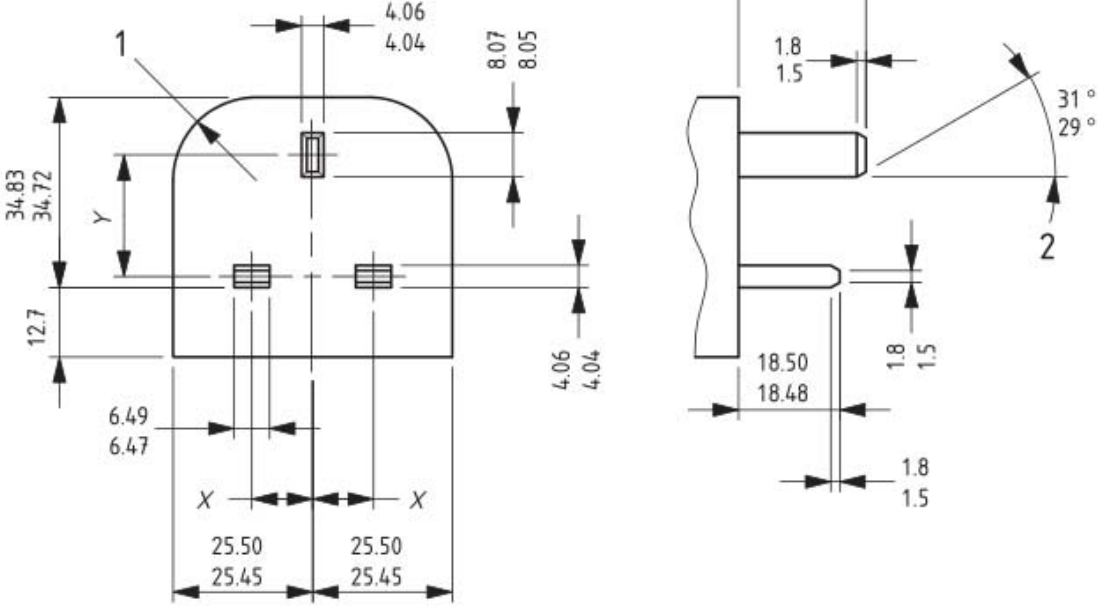

Key

1

R 15.2 TP (true profile) with a tolerance zone 0.1 from the TP; the form of this contour is to blend smoothly with the sides

2

This might be a chamfer or part of the surface of a cone

NOTE 1 All sharp edges of the shaped portion of all the pins of the socket-outlet are slightly rounded.

NOTE 2 The surface of the gauge in which the pins are mounted are flat to within 0.025 mm.

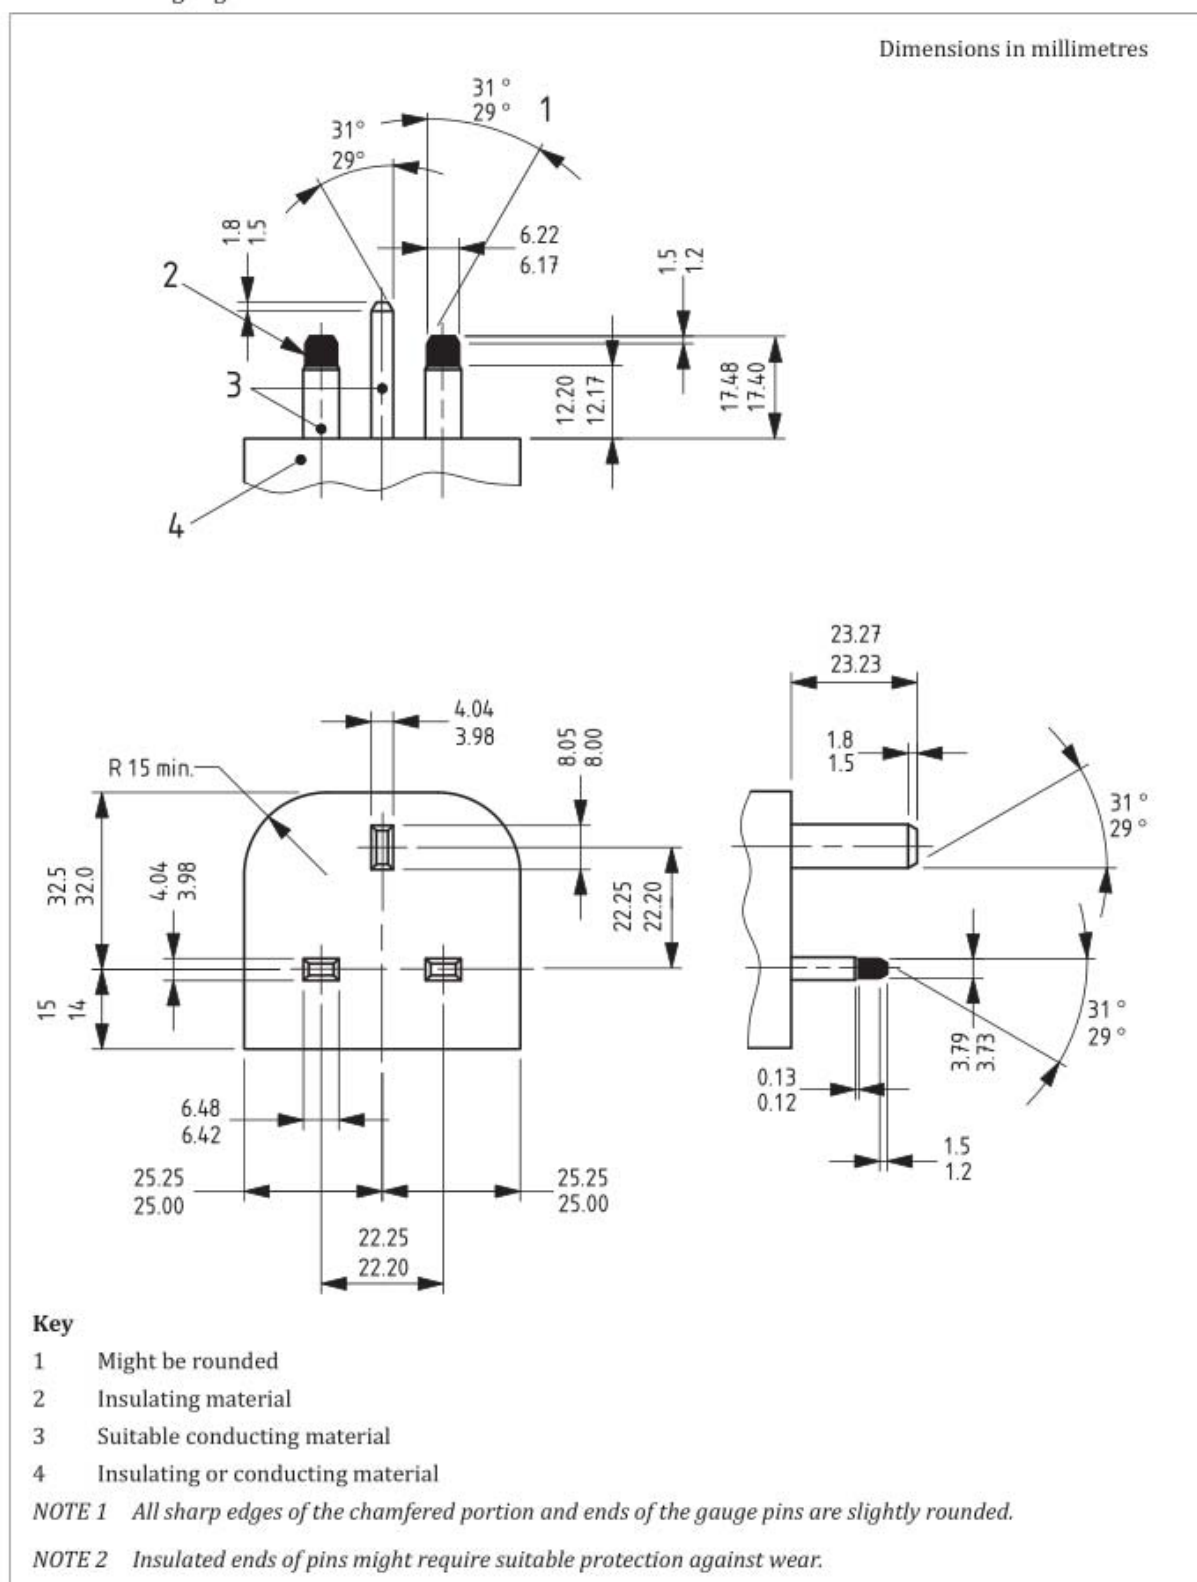
Figure 12 — Contact test gauge

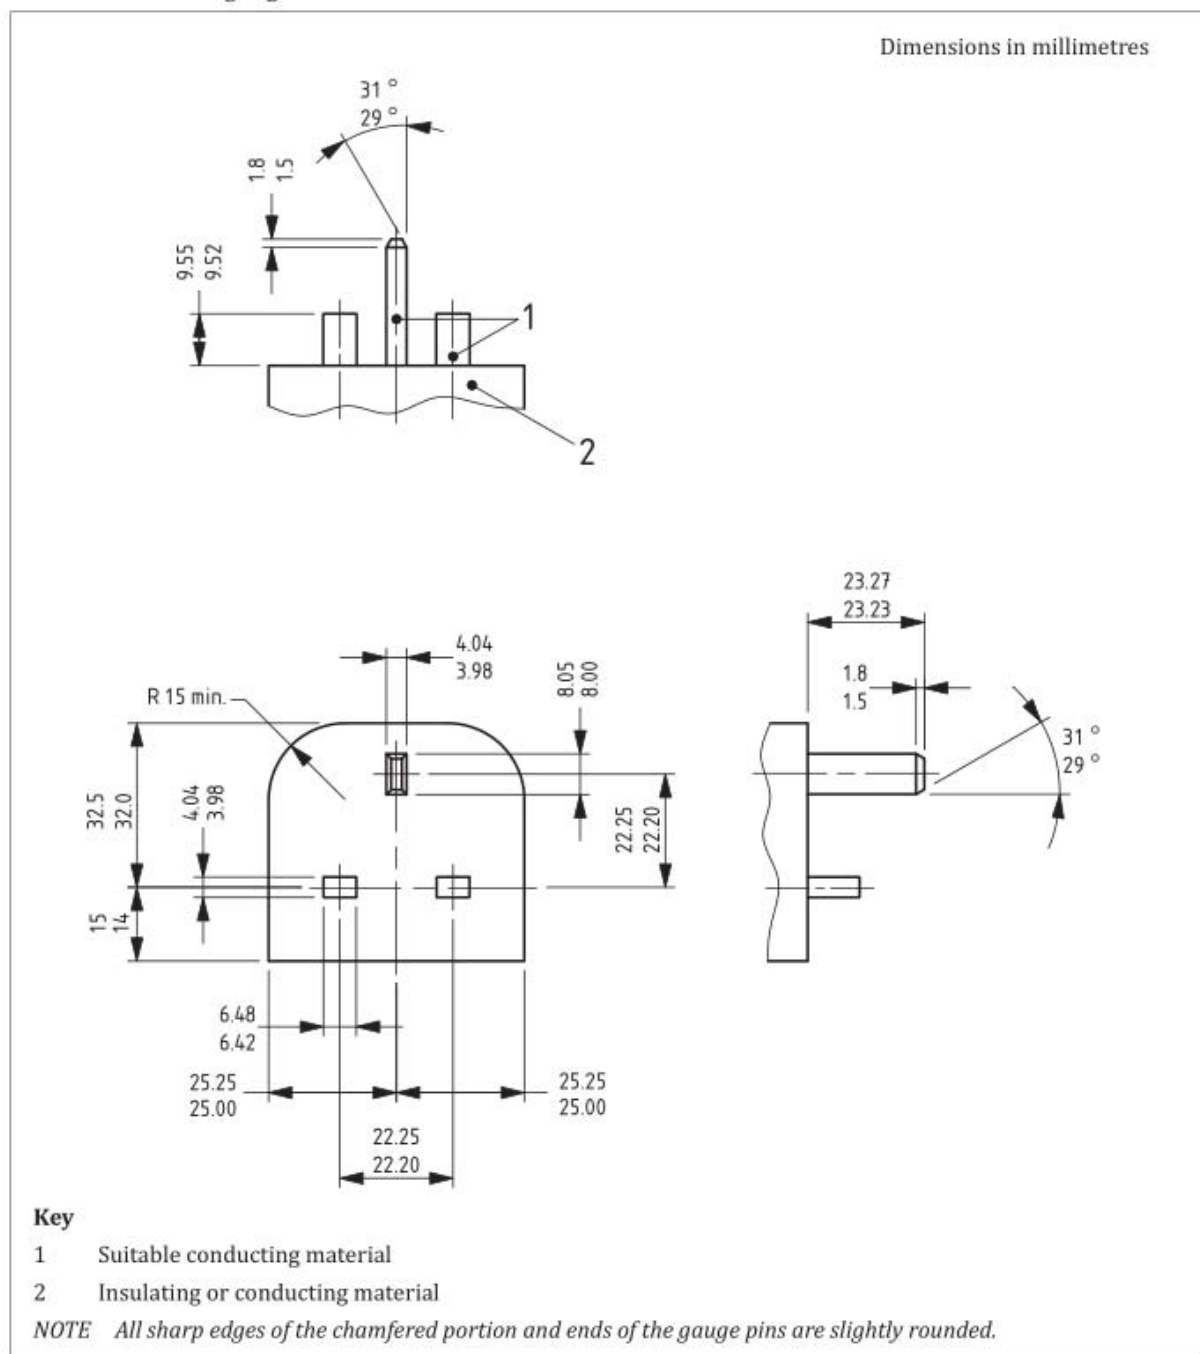
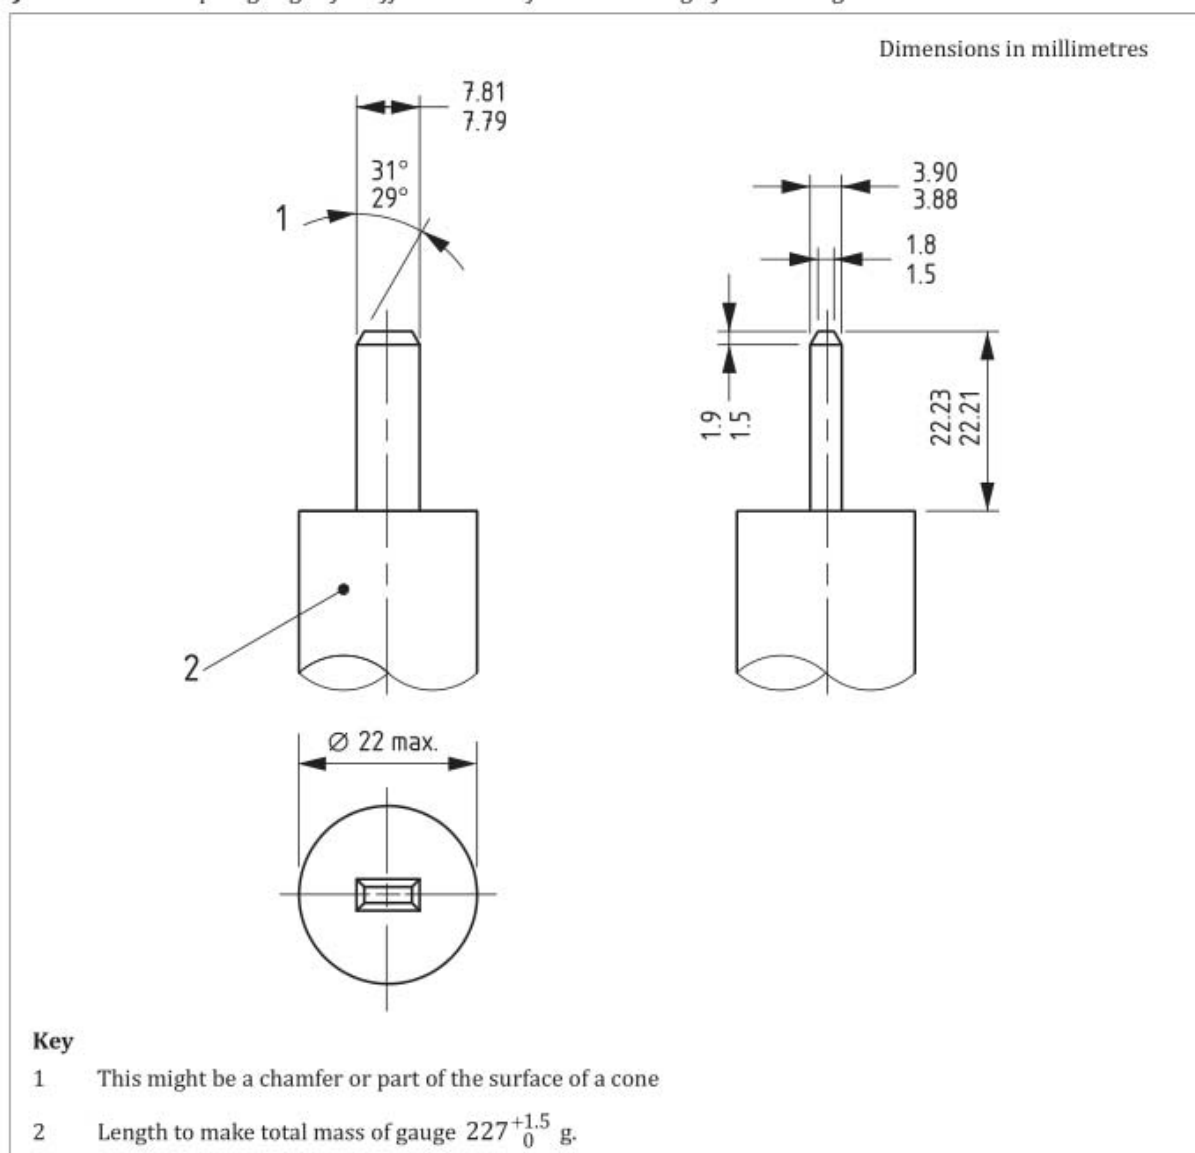
Figure 14 — Non-contact test gauge

Figure 16a) — Withdrawal pull gauges for effectiveness of contact: Gauge for earthing socket contact

7 Classification and rating

7.1 Classifications

Adaptors shall be classified as follows, as appropriate:

- fused or unfused;
- switched or unswitched;
- multiway (from [BS 1363](#) system to multiple outlets);
- intermediate;
- adaptor plug;
- rewirable or non-rewirable (in the case of an intermediate adaptor or adaptor plug);
- shaver adaptor fitted with an unterminated brass earth pin; or
- shaver adaptor fitted with an ISOD.

7.2 Rating

The rated voltage of adaptors which do not incorporate any electronic components other than indicator lights shall be 250 V.

The rated voltage of adaptors which incorporate electronic components shall be 230 V, 240 V or 250 V.

The rated current of adaptors shall be one of the following:

- a) 13 A for adaptors having BS 1363 type outlets;
- b) 13 A for an adaptor plug;
- c) equal to the sum of the rated currents of the adaptor socket-outlet portions, if this sum is lower than 13 A; or
- d) 13 A if the sum of the rated currents of the adaptor socket-outlet portions is higher than 13 A.

8 Marking and labelling

8.1 Adaptors shall be legibly and durably marked with the following information, which shall not be placed on screws, removable washers or other easily removable parts, or upon parts intended for separate sale:

- a) either the name, trademark or identification mark of the manufacturer or responsible vendor, which might be duplicated on a removable fuse carrier;
- b) the number of this British Standard, i.e. [BS 1363](#)²⁾;
- c) on rewirable adaptors, the terminals intended for the connection of the various conductors shall be identified by the symbols given in [8.5](#);
- d) for fused adaptors, the words “FUSE” or “FUSED” or the symbol (given in [8.5](#)) on the external accessible surface of the adaptor;
- e) non-rewirable adaptors shall be marked on the engagement surface with the rated current of the fuse link fitted, which shall not exceed the value given in [Table 2](#) for the appropriate size of flexible cable;
- f) adaptors other than shaver adaptors shall be marked, on the engagement surface with their total maximum electrical load intended to be connected in amperes, as calculated in [7.2](#), e.g. “MAX 13 A”;
- g) shaver adaptors shall be marked on the accessible external surface with appropriate words, e.g. “SHAVERS ONLY”.

Shaver adaptors shall be marked on the engagement surface with appropriate words to indicate that the adaptor shall be fitted with a 1 A rated fuse conforming to BS 646:1958+A2:2013;

- h) all adaptors shall be marked with:
 - 1) rated volts; and
 - 2) nature of supply.

²⁾ Marking [BS 1363](#) on or in relation to a product represents a manufacturer's declaration of conformity, i.e. a claim by or on behalf of the manufacturer that the product meets the requirements of the standard. The accuracy of the claim is solely the claimant's responsibility. Such a declaration is not to be confused with second or third party certification of conformity. Further testing and conformity certification remains at the discretion of the manufacturer and is not a requirement of this standard.

Table 2 — *Rated current and maximum fuse rating in normal use, and load for flexing and cable grip tests related to size of flexible cable*

| Flex cable nominal cross sectional area mm ² | Rated current ^{A)} A | Test current ±0.4 A A | Fuse rating A | Load for flexing test | Cable grip tests | |
|--|-------------------------------------|-----------------------------|-----------------------|--------------------------|------------------|----------------------------|
| | | | | +2%, -0% | Load +2%, -0% | Torque ^{B)} Nm |
| 0.5 | 3 | 3.5 | 3 (5) ^{C)} | 1 | 3 | 0.15 |
| 0.75 | 6 | 7 | 7 (13) ^{C)} | 1 | 3 | 0.20 |
| 1 (0.75) ^{D)} | 10 | 11 | 10 (13) ^{C)} | 2 | 3 | 0.25 |
| 1.25 (1) ^{D)} | 13 | 14 | 13 | 2 | 6 | 0.30 |
| 1.5 | 13 | 14 | 13 | 2 | 6 | 0.35 |

^{A)} Non-rewirable adaptors may have a rated current appropriate to a smaller cable size than that fitted, (e.g. a non-rewirable adaptor rated at 3 A may be fitted with an 0.75 mm cable). In such cases, load and torque parameters for testing shall relate to the size of cable fitted and the test current shall relate to the rated current of the adaptor.

^{B)} The recording of a measured value of torque in accordance with this table is considered to conform to this part of BS 1363 on condition that the uncertainty of measurement at not less than 95% confidence level does not exceed ±10%.

^{C)} The figure in brackets indicates the fuse rating when a non-rewirable adaptor is used with certain types of appliances where the use of the higher rated fuse link is necessary because of their characteristics. Portable socket-outlets are not considered to be appliances and therefore the higher rated fuse cannot be used.

^{D)} The figure in brackets indicates the flexible cable size which may be used with a maximum flexible cable length of 2 m.

8.1.1 Conformity shall be checked by inspection and by rubbing the marking for approximately 15 s with a cloth soaked in water, and again for approximately 15 s with a cloth soaked in an aliphatic solvent hexane with a content of aromatics of maximum 0.1% by volume, a kauri-butanol value of 29, initial boiling point of approximately 69 °C, and relative density of approximately 0.68. The marking shall remain legible. Markings produced by an engraving or moulding process shall be deemed to conform without test.

8.2 Rewirable intermediate adaptors and adaptor plugs shall have a removable tag or label indicating the rating of the fuse link fitted, e.g. "Fitted with X ampere fuse" (where X denotes the rating of the fuse link).

8.2.1 Conformity shall be checked by inspection.

8.3 Except where an intermediate adaptor or adaptor plug fitted with a flexible cable is supplied direct to a manufacturer for incorporation in other equipment, the free end of such an assembly shall have a label attached which shall include the following:

- the statement: "The flexible cable of this intermediate adaptor (or adaptor plug) must be connected to an item of equipment before being plugged into a socket-outlet.";
- the maximum rating, in amperes, of the equipment to which it might be fitted (as given in [Table 2](#));
- the colour code of the cores of the flexible cable as follows:

"IMPORTANT. Wires in the mains lead are coloured in accordance with the following code:

| | |
|------------------|----------------|
| Green-and-yellow | Earth (if any) |
| Blue | Neutral |
| Brown | Line"; and |

- d) if the intermediate adaptor or adaptor plug is fitted with a 2-core flexible cable, the following statement:



"This lead must not be used with equipment requiring the protection of an earth continuity conductor".

8.3.1 Conformity shall be checked by inspection.


- 8.4 Rewirable adaptors and adaptor plugs shall be provided with adequate instructions for the safe connection of the appropriate flexible cables including clear instructions for the removal of insulation from the conductors.

8.4.1 Conformity shall be checked by inspection.

8.5 Symbols shall be as follows:

| | |
|-----------------------|--|
| amperes | A |
| volts | V |
| alternating current | ~ |
| direct current (d.c.) | — — — — |
| line (adaptor plugs) | L |
| neutral | N |
| earth |  (preferred) or  |

NOTE 1 The letter "E" may be used in addition to either of these symbols.

| | | |
|---|---|--|
| supply line terminal (intermediate adaptors) | L in or L1 | supply line terminal (intermediate adaptors) |
| load line terminal (intermediate adaptors) | L out or L2 | load line terminal (intermediate adaptors) |
| fuse |  | |

NOTE 2 For the marking of the rated current and rated voltage of the adaptor, figures may be used alone. The figures for the current rating being placed before or above that of the rated voltage and separated by a line.

If a symbol for nature of supply is used, it shall be placed next to the marking for rated current and rated voltage.

EXAMPLES

13 A 250 V ~ or 13/250 ~ or $\frac{13}{250}$ ~
or 13 A 250 V a.c. or 13/250 a.c. or $\frac{13}{250}$ a.c.

9 Clearances, creepage distances and solid insulation

Adaptors shall be constructed so that the clearances, creepage distances and solid insulation are adequate to withstand the electrical stresses taking into account the environmental influences that might occur. Clearances, creepage distances and solid insulation shall conform to the relevant requirements of 9.1, 9.2, 9.3 and 9.4.

The distance between lead wires in the pinch of a neon lamp with external resistor shall be a minimum of 1 mm.

Adaptors conforming to the requirements for basic insulation shall be deemed to meet the requirements of this clause. If the manufacturer declares an insulation level exceeding basic insulation then the adaptor shall be tested accordingly.

NOTE 1 The requirements and tests are based on [BS EN IEC 60664-1](#).

NOTE 2 Product insulation consists of basic insulation and protective earthing as required by [BS EN 61140:2016](#) for Class I equipment. Mechanical strength equivalent to that which would be provided by reinforced insulation as listed in [BS EN 61140:2016](#) is achieved in [BS 1363](#) products through specific mechanical and material tests.

9.1 Clearances

Adaptors energized directly from the low voltage supply fall into Overvoltage Category III.

The clearances shall withstand the rated impulse voltage declared by the manufacturer considering the rated voltage and the Overvoltage Category as given in [Annex C](#) and the pollution degree declared by the manufacturer according to [Annex B](#).

NOTE 1 For the measurements, all parts which can be removed without the use of a tool are removed and moveable parts which can be assembled in different orientations are placed in the most unfavourable position.

NOTE 2 Moveable parts are, for example, hexagonal nuts, the position of which cannot be controlled throughout an assembly.

9.1.1 Clearances for basic insulation

The clearances for basic insulation shall be not less than the values given in [Table 3](#).

Conformity shall be checked by inspection, and if necessary, by measurement, or by the test of [Annex E](#).

Smaller clearances, other than those values marked in [Table 3](#) with footnote "B", shall be permitted if the plug meets the impulse withstand voltage test of [Annex C](#) at the impulse voltage specified in [Table E.1](#). This exception shall apply only if the parts are rigid or located by mouldings or if the construction is such that it is unlikely that distances will be reduced by distortion or by movement of the parts during mounting, connection and normal use.

If clearance distances are to be measured, this shall be carried out in accordance with [Annex F](#).

9.1.2 Clearances for functional insulation

The clearances for functional insulation shall be not less than the values specified for basic insulation in [9.1.1](#).

Conformity shall be checked by inspection, and if necessary, by measurement, or by the test of [Annex E](#).

If clearance distances are to be measured, this shall be carried out in accordance with [Annex F](#).

9.1.3 Clearances for supplementary insulation

The clearances for supplementary insulation shall be not less than the values specified for basic insulation in [9.1.1](#).

Conformity shall be checked by inspection, and if necessary by measurement, or by the test of [Annex E](#).

If clearance distances are to be measured, this shall be carried out in accordance with [Annex F](#).

Table 3 — Minimum clearances for basic insulation

| Rated impulse withstand voltage | Minimum clearances in air up to 2 000 m above sea level |
|---------------------------------|---|
| kV ^{A)} | mm |
| 0.33 | 0.2 ^{B)} |
| 0.50 | 0.2 ^{B)} |
| 0.80 | 0.2 ^{B)} |
| 1.5 | 0.5 |
| 2.5 | 1.5 |
| 4.0 | 3.0 |
| 6.0 | 5.5 |

^{A)} See [Annex C](#). This voltage is:

- for functional insulation: the minimum impulse voltage expected to occur across the clearance;
- for basic insulation directly exposed to or significantly influenced by transient overvoltage from the low voltage mains: the rated impulse withstand voltage of the adaptor;
- for other basic insulation: the highest impulse voltage that can occur in the circuit.

^{B)} Minimum clearances values are based on [BS EN IEC 60664-1](#).

9.1.4 Clearances for reinforced insulation

The clearances for reinforced insulation shall be not less than the values specified for basic insulation in [9.1.1](#) but using the next higher step for rated impulse withstand voltage given in [Table 3](#).

This requirement shall not be applied to the sleeves of the adaptor plug pins.

Conformity shall be checked by inspection and by measurement, or by the test of [Annex E](#).

9.1.5 Contact gap

The minimum contact gap shall be 1.2 mm when the switch is in the open position, except for electronic switches covered by [A.5](#).

Conformity shall be checked by measurement.

9.2 Creepage distances

The creepage distance shall be dimensioned for the voltage, which is expected to occur in normal use taking into account the pollution degree, and the material group as declared by the manufacturer.

NOTE 1 For the measurements, all parts which can be removed without the use of a tool are removed and moveable parts which can be assembled in different orientations are placed in the most unfavourable position.

NOTE 2 Moveable parts are, for example, hexagonal nuts, the position of which cannot be controlled throughout an assembly.

NOTE 3 A creepage distance cannot be less than the associated clearance.

Creepage distances shall be measured in accordance with [Annex F](#).

The relationship between material group and between comparative tracking index (CTI) values and proof tracking index (PTI) values is as follows:

| | |
|---------------------|---------------------------------|
| Material group I | $600 \leq \text{CTI/PTI}$ |
| Material group II | $400 \leq \text{CTI/PTI} < 600$ |
| Material group IIIa | $175 \leq \text{CTI/PTI} < 400$ |
| Material group IIIb | $100 \leq \text{CTI/PTI} < 175$ |

The CTI or PTI values shall be determined in accordance with [Annex D](#).

NOTE 4 For glass, ceramics and other inorganic materials which do not track, creepage distances need not be greater than their associated clearance.

9.2.1 Creepage distances for basic insulation

The creepage distances for basic insulation shall be not less than the values given in Table 4.
Conformity shall be checked by measurement.

Table 4 — Minimum creepage distances (mm) for basic insulation

| Rated voltage ^{A)} V (r.m.s) | Pollution degree 2 ^{B)} | | | Pollution degree 3 ^{B)} | | |
|--|----------------------------------|-----|-----------|----------------------------------|-----|------|
| Up to and including | Material group | | | Material group | | |
| — | I | II | IIIa/IIIb | I | II | IIIa |
| 250 | 1.3 | 1.8 | 2.5 | 3.2 | 3.6 | 4.0 |

^{A)} This voltage is the voltage rationalized through BS EN IEC 60664-1:2020, Table F.3a and Table F.3b based on the nominal voltage of the supply system.

^{B)} Details of pollution degrees are given in Annex B.

9.2.2 Creepage distances for functional insulation

The creepage distance for functional insulation shall be not less than the values specified for basic insulation in 9.2.1.
Conformity shall be checked by measurement.

9.2.3 Creepage distances for supplementary insulation

The creepage distances for supplementary insulation shall be not less than the values specified for basic insulation in 9.2.1.
Conformity shall be checked by measurement.

9.2.4 Creepage distances for reinforced insulation

The creepage distances for reinforced insulation shall be not less than those derived from twice the distance specified for basic insulation in Table 4.
This requirement shall not be applied to the sleeves of the adaptor plug pins.
Conformity shall be checked by measurement.

9.3 Solid insulation

Solid insulation for basic, functional, supplementary and reinforced insulation shall be capable of withstanding electrical stresses which might occur in normal use.
No minimum thickness is specified for solid insulation.

9.3.1 Conformity shall be checked by tests in accordance with 16.1.3 using the values given in Table 5.

Table 5 — Withstand voltages for insulation types

| Insulation | Test voltage V (r.m.s) |
|--------------------------|---------------------------|
| Functional insulation | 1 500 |
| Basic insulation | 1 500 |
| Supplementary insulation | 1 500 |
| Reinforced insulation | 3 000 |

9.4 Requirements for printed wiring boards and equivalent construction

Printed wiring boards and equivalent construction shall conform to [BS EN 60664-5](#).

Where coating, potting or moulding is used articles shall conform to [BS EN 60664-3](#).

10 Accessibility of live parts

- 10.1** Live parts of adaptors shall not be accessible when wired as in use and in full engagement in a corresponding socket-outlet. Removal of detachable fuse carriers shall not result in live parts becoming accessible when the adaptor is in full engagement with the socket-outlet.


Additionally, adaptor plugs shall conform to this requirement without a flexible cable fitted.

- 10.1.1** Conformity shall be checked by the application of test probe 12 of [BS EN 61032:1998](#) applied with a force of 5_{-1}^0 N with non-rewirable adaptors fitted with their appropriate flexible cables, rewirable intermediate adaptors fitted with a 2-core flexible cable as given in [BS EN 50525-2-71](#). Detachable fuse carriers shall be removed before this test is undertaken.

- 10.2** Adaptors shall be so designed that when they are mounted and wired as in normal use live parts are not accessible.

- 10.2.1** Conformity shall be checked by the application of the test pin shown in [Figure 1](#) perpendicular to the accessible external surface of the adaptor with a force of 5_{-1}^0 N. It shall not be possible to touch live parts.

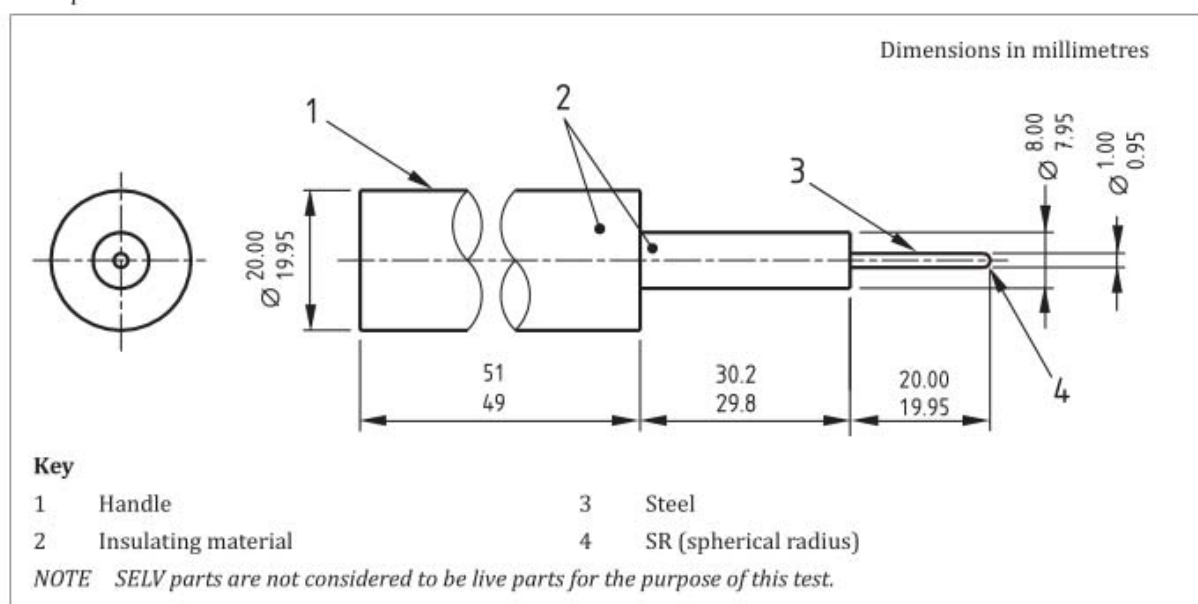Figure 1 — Test pin



- 10.3** The plug portion of an adaptor shall be designed and constructed so as to protect the user against accidental contact with live parts during insertion or withdrawal from corresponding socket-outlets. The socket-outlets of an adaptor shall be designed and constructed so as to protect the user against accidental contact with live parts during insertion or withdrawal of plugs.

- 10.3.1** Conformity shall be verified by satisfying the dimensional and gauging requirements of this part of [BS 1363](#).

10.4 Resilient covers of adaptors shall be so designed and constructed that when assembled and wired as in normal use, there is no risk that, as a result of undue pressure, live parts could penetrate the cover or become so disposed as to reduce creepage distances and clearances below those given in [Clause 9](#).

10.4.1 Conformity shall be checked by the following test [an example of a suitable apparatus is shown in [Figure 2a](#)].

Figure 2a) — Apparatus for mechanical strength test on resilient covers

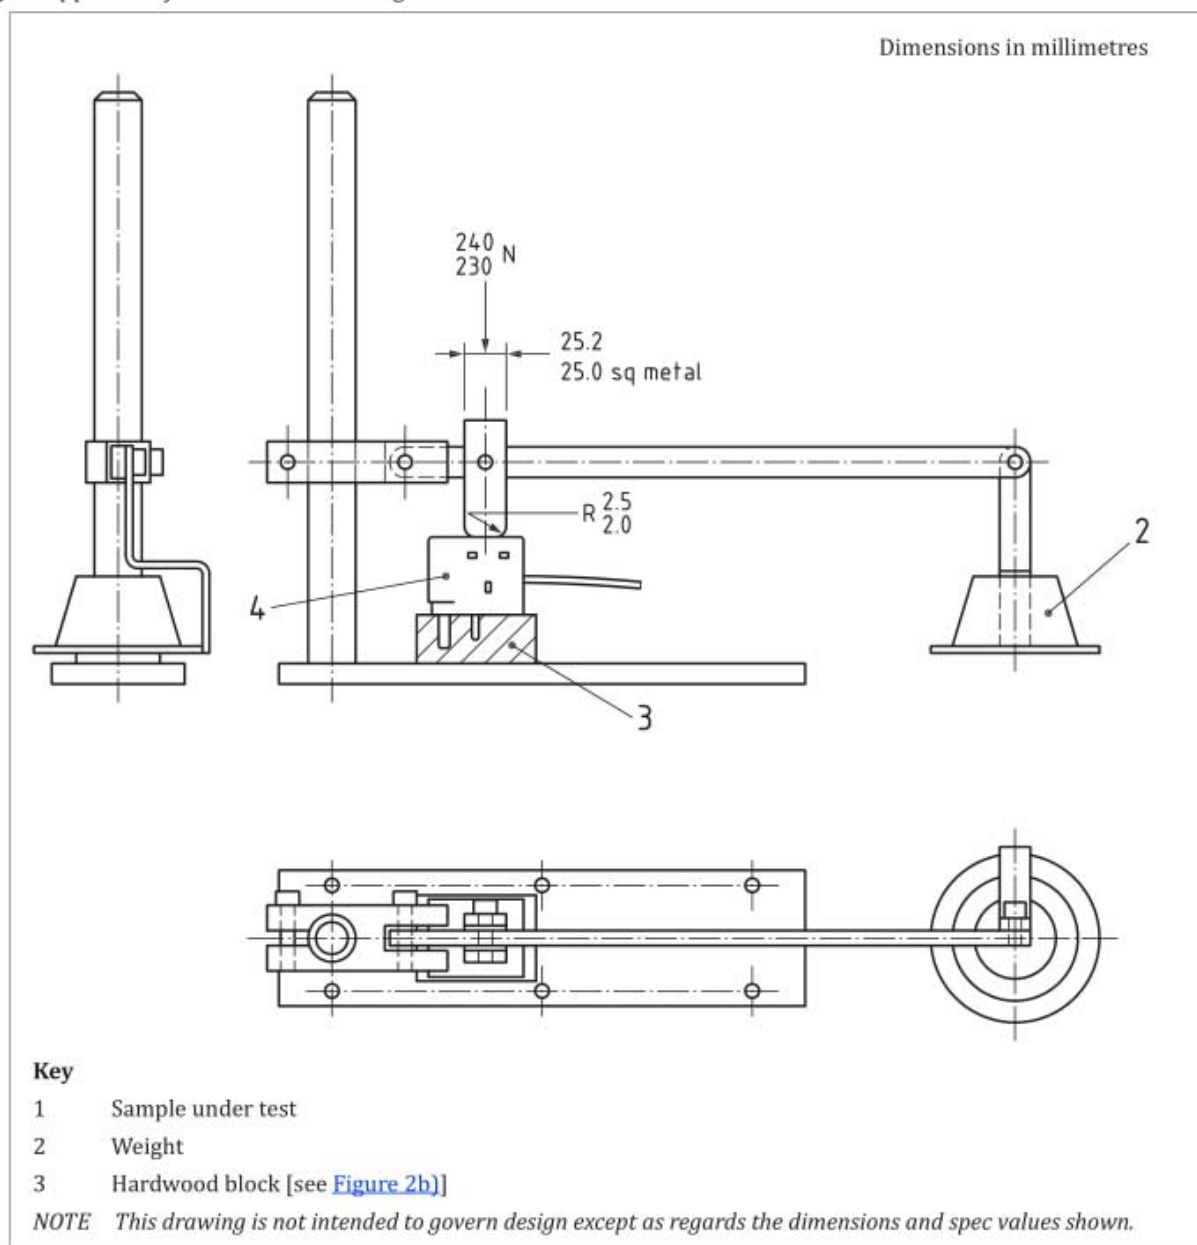
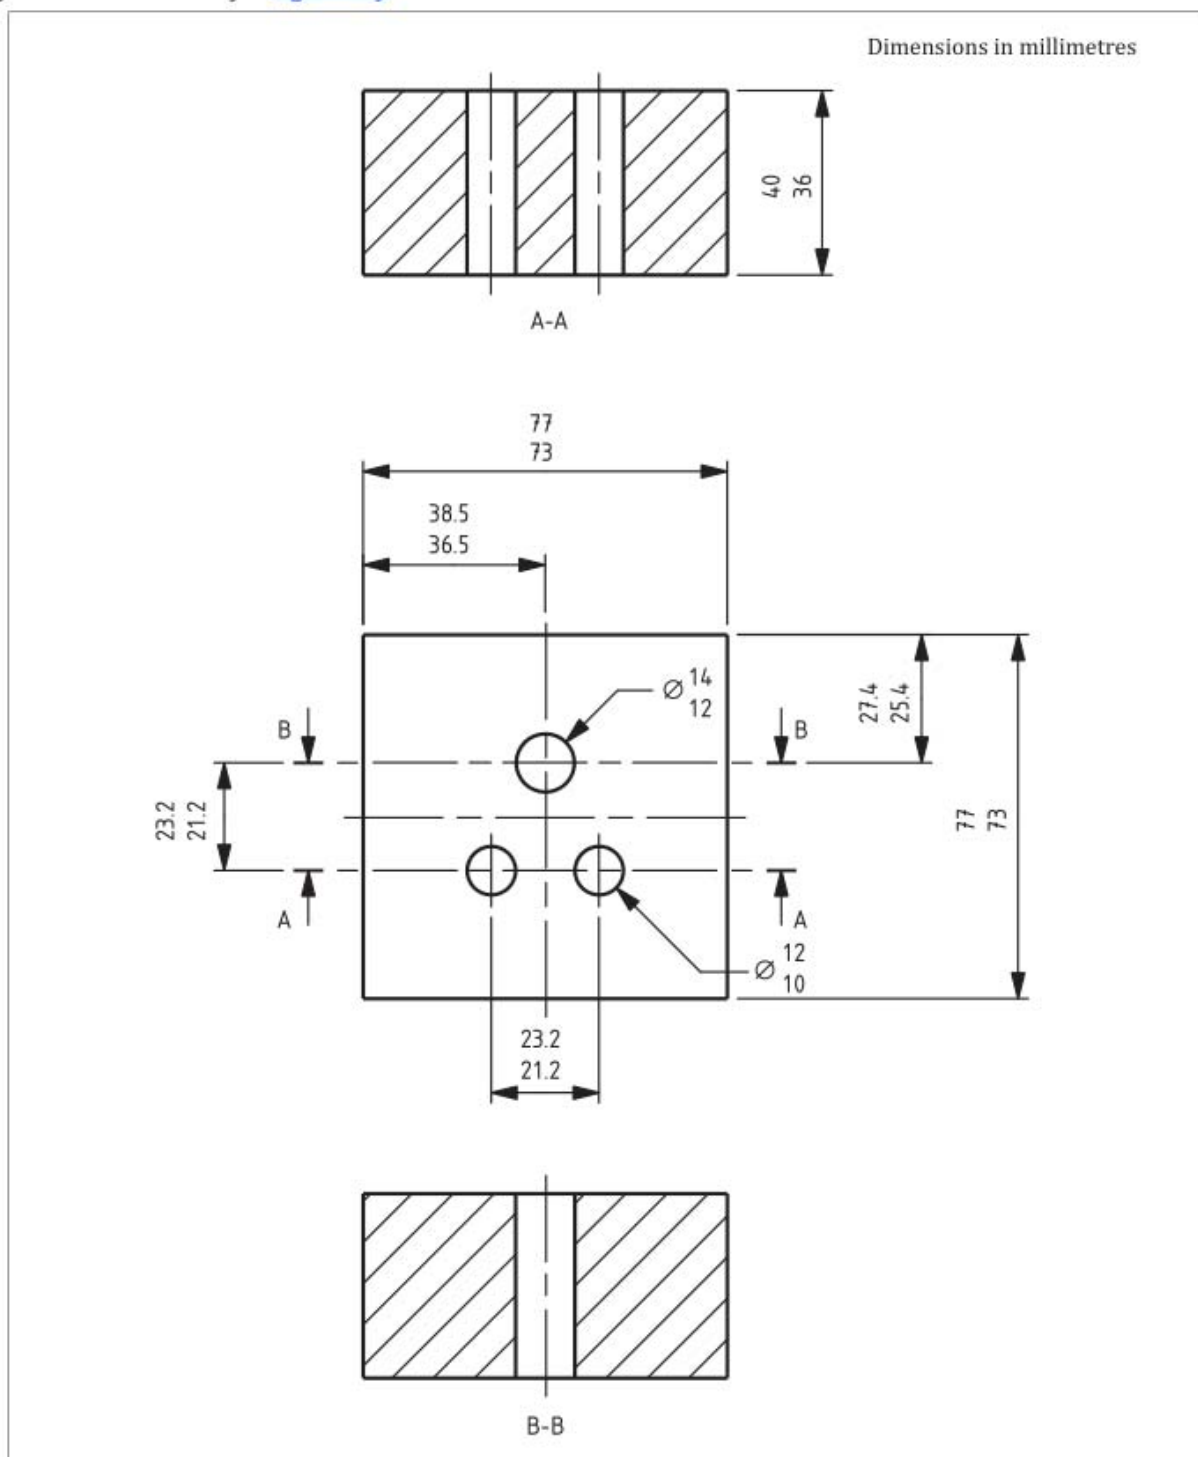


Figure 2b) — *Hardwood block for Figure 2a)*

The design of the apparatus shall be such that a steady force of 240_{-10}^{0} N can be applied to those places where the possibility of a failure exists, the force being applied through a metal test pressure block as shown in Figure 2a).

Each sample shall be subjected to the force at each chosen place in turn. During each application of force, a test voltage of $2\,000\text{ V} \pm 60\text{ V}$, 50 Hz of substantially sinusoidal waveforce shall be applied for 60_{-0}^{+5} s between all live parts bonded together and the metal test pressure block.

During the test no flashover or breakdown shall occur.

After the test it shall not be possible to touch live parts with test probe 11 of [BS EN 61032:1998](#) applied with a force of 30_{-2}^0 N.

- 10.5** Except for assemblies supplied to equipment manufacturers for incorporation into their equipment, an intermediate adaptor or adaptor plug supplied fitted with a flexible cable shall have the free end of such an assembly encapsulated in insulating material.

- 10.5.1** Conformity shall be checked by inspection.

- 10.6** It shall not be possible to introduce a conducting device through the earthing socket aperture(s) of an adaptor in such a manner that there is a risk of making contact with live parts, or a live conductor with or without insulation.

- 10.6.1** Conformity shall be checked by introducing a rigid metal pin, $1_{-0,05}^0$ mm diameter \times 60 mm \pm 1 mm long, through any earthing socket aperture or apertures of a socket-outlet of an adaptor mounted as in normal use, applying a force of 5_{-1}^0 N, and with the conductors, if any, in the most unfavourable position.

11 Provision for earthing

- 11.1** Adaptors shall be so constructed that, when inserting a plug with an earthing pin into a corresponding socket-outlet of an adaptor the earth connection is made before the current carrying pins of the plug become live. When withdrawing a plug the current carrying parts shall separate before the earth contact is broken.

- 11.1.1** Conformity shall be checked by inspection and electrical test.

- 11.2** All accessible metal parts of adaptors shall be in effective electrical contact with the earthing socket-contact and earthing plug pin, except that metal parts on or screws in or through, non-conducting material, and separated by such material from current carrying parts in such a way that in normal use they cannot become live, need not be in effective electrical contact with the earthing socket contact and earthing plug pin.

Metal parts having an accessible surface coating of lacquer or enamel shall be tested as accessible metal parts.

- 11.2.1** Conformity shall be checked by inspection, and the following:

- for metal parts insulated from live parts, by the test described in [16.1.3](#); and
- for metal parts connected to an earthing terminal or earthing plug pin, by the following test.

A current of 25 A \pm 0.75 A, derived from an a.c. source having a no-load voltage not exceeding 12 V, shall be passed for 60_{0}^{+5} s as follows:

- for all adaptors, between the earthing pin of the adaptor, and the following:
 - the terminal of an earthing pin of an appropriate plug inserted into each adaptor earthing socket contact;
 - any accessible metal part intended to be earthed; and
- for intermediate adaptors and adaptor plugs, between the earthing terminal, and the following:
 - the remote end of an earthing pin of an adaptor;
 - any accessible metal part intended to be earthed.

The resistance between the earthing plug pin or earthing terminal and any other nominated part shall not exceed 0.05 Ω .

12 Terminals and terminations of intermediate adaptors and adaptor plugs

- 12.1** Terminals and terminations shall provide for effective clamping and securing of conductors connected to them, so that efficient electrical connection is made.
- 12.1.1** Conformity shall be checked in accordance with [12.2](#) to [12.9](#).
- 12.2** Rewirable adaptors shall be provided with terminals as defined in [3.34](#) or [3.28](#).
- 12.2.1** Conformity shall be checked by inspection.
- 12.3** Non-rewirable adaptors shall be provided with soldered, welded, crimped or similar terminations. For all these methods of termination, not more than one strand of a 0.5 mm² conductor or two strands of other sized conductors shall be fractured during connection. Screwed and “snap-on” terminals shall not be used. Crimped connections shall not be made on to pre-soldered flexible cables unless the soldered area is entirely outside the crimp.
- 12.3.1** Conformity shall be checked by inspection and measurement.
- 12.4** Terminals in rewirable adaptors shall permit the connection, without special preparation, of flexible cables having nominal conductor cross-sectional areas of 0.5 mm² to 1.5 mm².
- 12.4.1** Conformity shall be checked by inspection and fitting the appropriate conductors.
- 12.5** Where pillar terminals are used, they shall have clamping screws of sufficient length to extend to the far side of the conductor hole. The end of the screw shall be slightly rounded to minimize damage to the conductors. The sizes of the conductor hole and the clamping screw shall be such that the clearance between each side of the major diameter of the clamping screw and the conductor hole does not exceed 0.4 mm.
- 12.5.1** Conformity shall be checked by inspection and measurement.
- 12.6** Terminal screws shall have a declared outside diameter of not less than 3 mm or be not smaller than 6 B.A.
- Thread cutting and/or thread forming screws shall not be used.
- 12.6.1** Conformity shall be checked by inspection and measurement.
- 12.7** Insulating barriers in intermediate adaptors or adaptor plugs shall be an integral part, so arranged that with the cable anchorage rendered inoperative and the earth or line conductors becoming detached from their respective terminals, there is negligible risk of the following:
- a) the earth conductor coming into contact with parts at line potential; and
 - b) the line conductor in a fused adaptor coming into contact with the line pin assembly.
- 12.7.1** Conformity shall be checked by inspection and, except for non-rewirable adaptors, by the following test.
- Rewirable adaptors shall be wired as in normal use with an appropriate 0.5 mm² 3-core flexible cable as given in [BS EN 50525-2-11:2011](#) in accordance with the manufacturer's instructions. All terminal screws or nuts shall be tightened to the appropriate torque given in [Table 6](#).

Table 6 — Torque values for screws and nuts

| Declared diameter of screw thread | Torque (see Note 1) | | |
|-----------------------------------|-------------------------------|---------------------------------|-----------------------------------|
| | For metal screws (see Note 2) | For other metal screws and nuts | For screws of insulating material |
| mm | Nm | Nm | Nm |
| Up to and including 2.8 | 0.2 | 0.4 | 0.4 |
| Over 2.8 up to and including 3 | 0.25 | 0.5 | 0.5 |
| Over 3.0 up to and including 3.2 | 0.3 | 0.6 | 0.6 |
| Over 3.2 up to and including 3.6 | 0.4 | 0.8 | 0.6 |
| Over 3.6 up to and including 4.1 | 0.7 | 1.2 | 0.6 |
| Over 4.1 up to and including 4.7 | 0.8 | 1.8 | 0.9 |
| Over 4.7 up to and including 5.3 | 0.8 | 2.0 | 1.0 |
| Over 5.3 up to and including 6 | — | 2.5 | 1.25 |

NOTE 1 The recording of a measured value given in this table is considered to conform to this part of [BS 1363](#) on condition that the uncertainty of measurement at not less than 95% confidence level does not exceed ±10%.

NOTE 2 This column applies to metal screws without heads if the screw when tightened does not protrude from the hole, and to other metal screws which cannot be tightened by means of a screwdriver with blade wider than the diameter of the screw.

A continuity indicating circuit operating at not less than 40 V shall be connected between the conductors and the other parts nominated. All terminal screws shall then be loosened and the cable anchorage rendered inoperative and the cover of the adaptor refitted. The flexible cable shall then be withdrawn from the adaptor at a rate not exceeding 50 mm/min, the direction of the pull being varied, until the earth core is pulled free of the adaptor. The test shall be made six times in all. For each new test, a fresh section of the cable shall be fitted and the flexible cable rotated through approximately 60° in the plane perpendicular to its major axis in a clockwise direction before fitting, unless the design is such that this is not practicable.

There shall be no contact between parts at line potential and the earth conductor, or between the line conductor and line pin assembly, thus bypassing the fuse link.

- 12.8 Intermediate adaptors or adaptor plugs shall be designed so that they can be wired in a manner which prevents strain to the earth connection before the line and/or neutral connection when the cable anchorage is rendered inoperative.
- 12.8.1 Conformity shall be checked by inspection and manipulation using an intermediate adaptor or adaptor plug wired in accordance with the manufacturer's instructions.
- 12.9 Terminals of intermediate adaptors or adaptor plugs shall be so located or shielded that if a strand of a flexible conductor escapes when the conductors are fitted, there is negligible risk of accidental connection between live parts and accessible external surfaces, or of a stray strand bypassing the fuse link.
- 12.9.1 Conformity shall be checked by inspection, and by the following test.
- A length of insulation in accordance with the manufacturer's instructions shall be removed from the end of a flexible conductor having a nominal cross-sectional area of 1.5 mm². One strand of the flexible conductor shall be left free and the other strands shall be fully inserted into and clamped in the terminal. The free strand shall be bent without tearing the insulation back, in every possible direction, but without making sharp bends round barriers unless a bend is reproduced by the replacement of the cover.

The free strand of a conductor connected to a live terminal shall not:

- a) touch any metal part so as to bypass the fuse link;
- b) touch any metal part which is accessible or is connected to an accessible metal part; or
- c) reduce creepage distance and clearance to accessible surfaces to less than 1.3 mm.

The free strand of a conductor connected to an earthing terminal shall not touch any live parts.

13 Construction of adaptors (plug portion)

13.1 The disposition of the adaptor plug pins (including ISODs where applicable) shall be as shown in Figure 4a).

Figure 4a) — Dimensions and disposition of pins

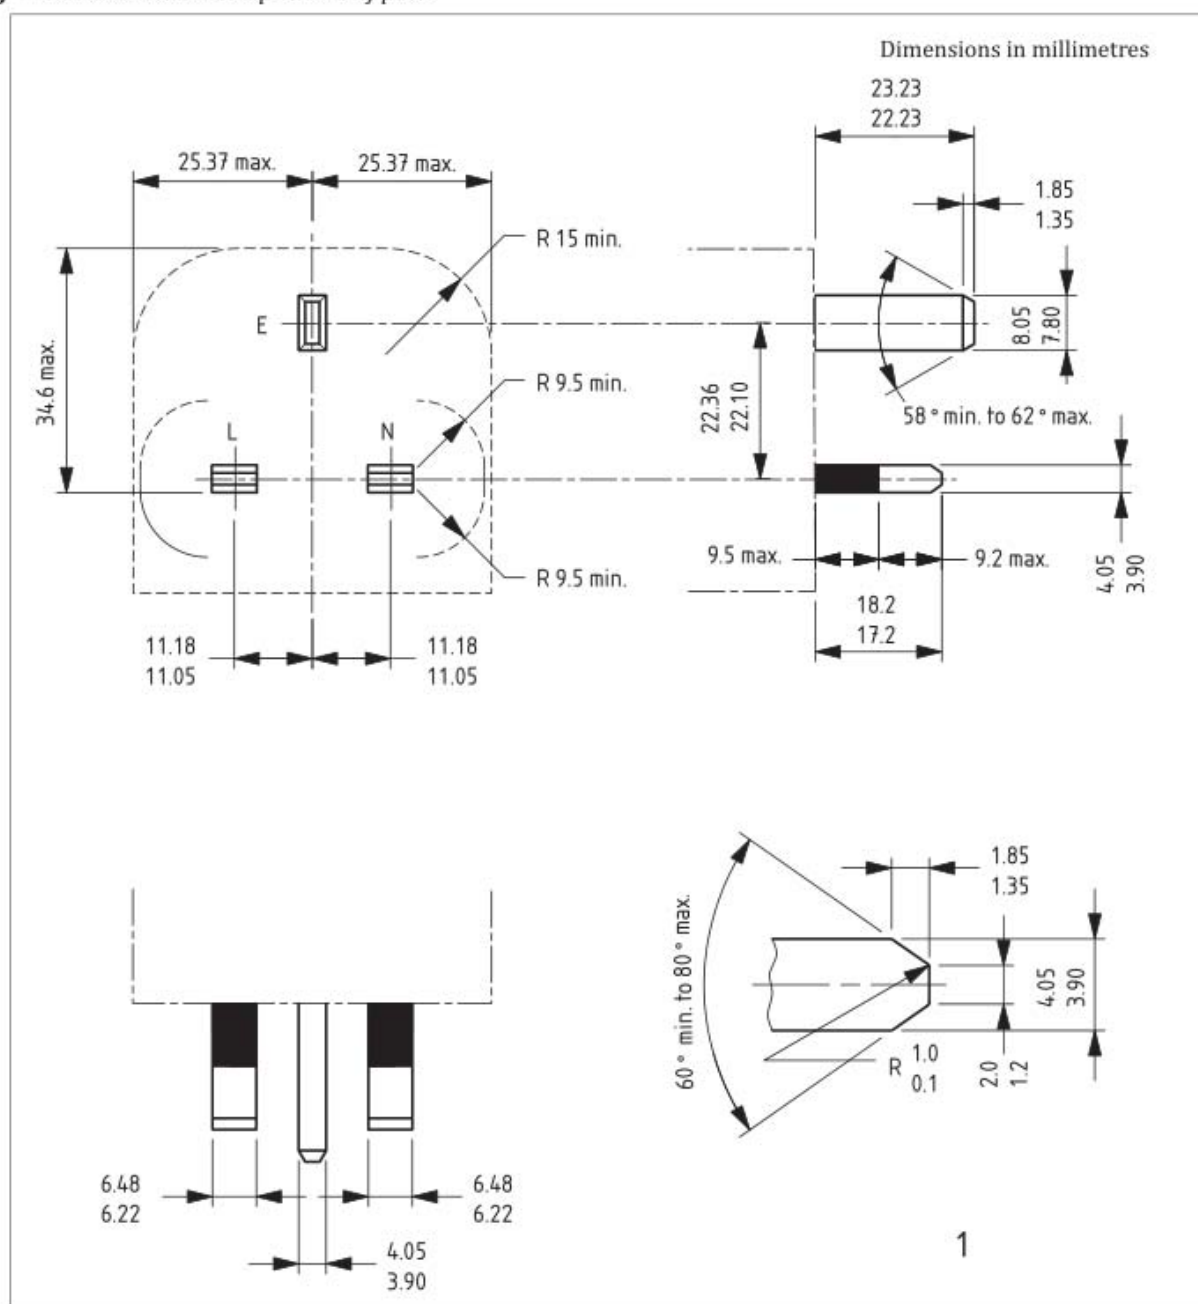
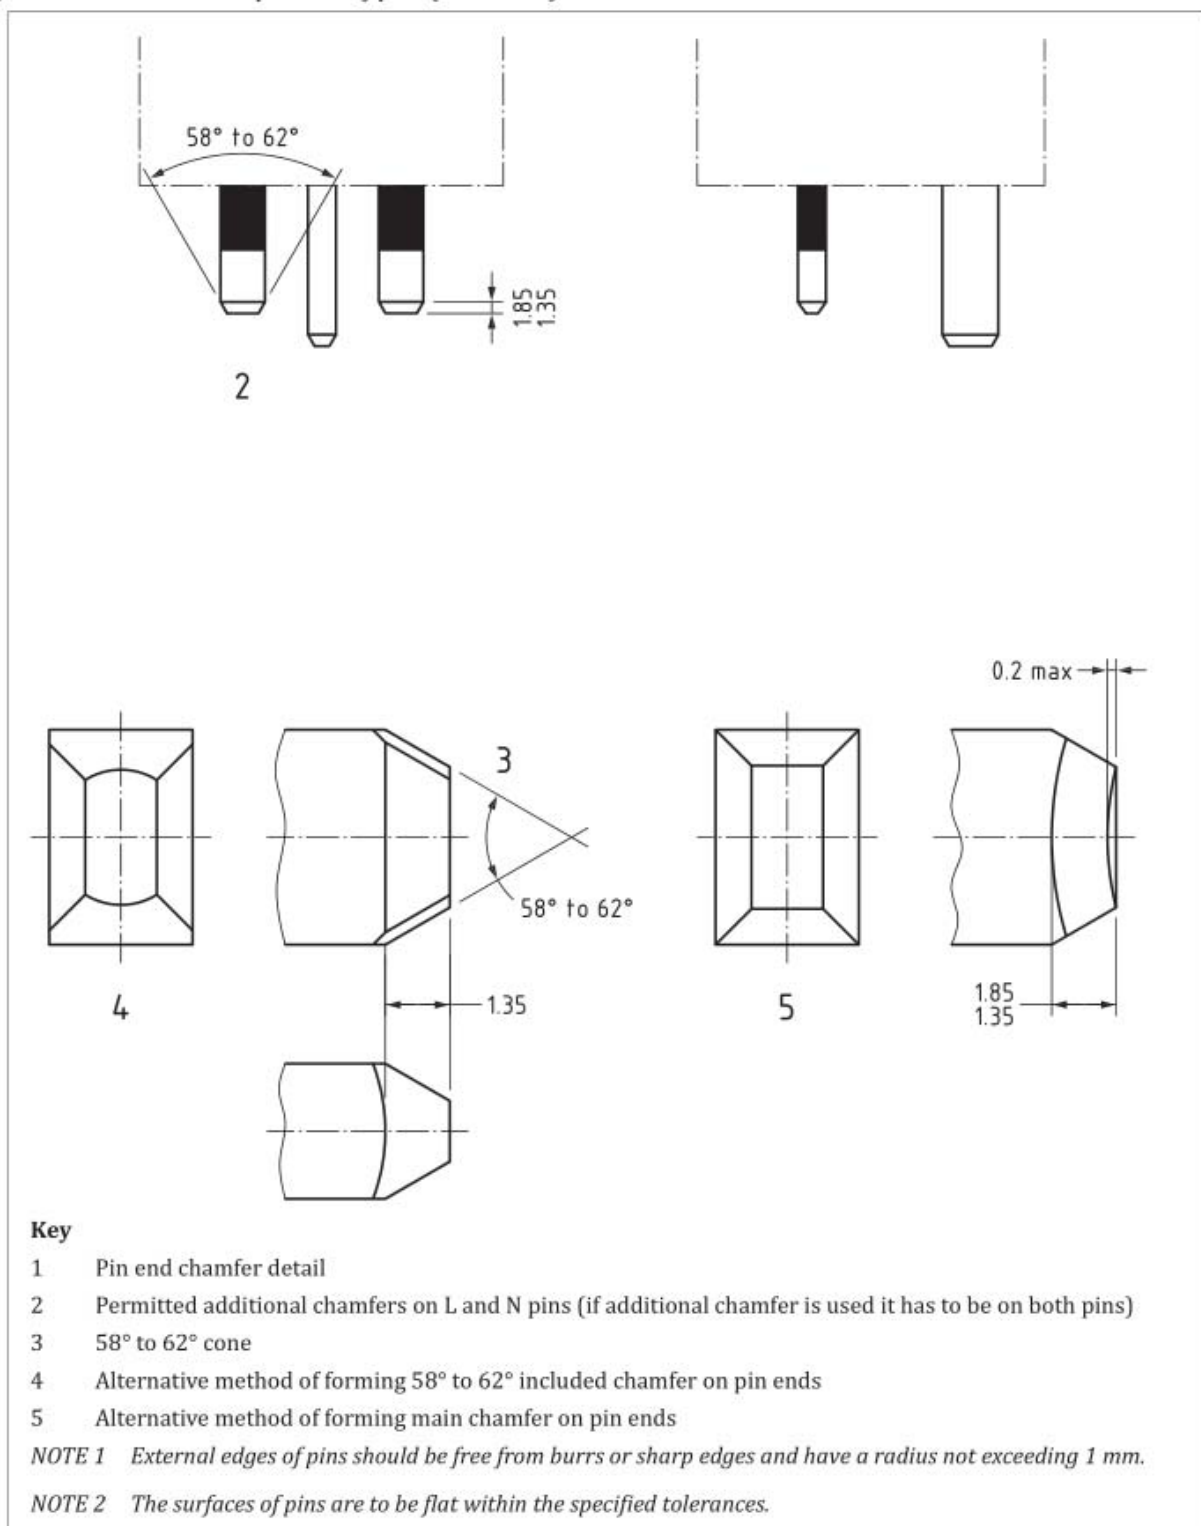


Figure 4a) — Dimensions and disposition of pins (continued)

13.1.1 Conformity shall be checked by inspection.

13.2 The outline of the adaptor shall not exceed the dimensions shown in [Figure 4a\)](#) for a distance of not less than 6.35 mm from the engagement surface and within these dimensions there shall be no axial projection from the engagement surface of the adaptor, except that at a distance more than 6.35 mm from the engagement surface the outline of the adaptor plug can exceed the dimensions shown in

[Figure 4a\)](#) in the plane of the earth pin and in the plane of the cable entry to facilitate the removal of the adaptor from the socket.

Pin disposition, length and body outline shall be checked by use of the gauge shown in [Figure 5](#) in accordance with the following test. Pin and sleeve dimensions shall be checked by measurement and shall conform to [Figure 4a\)](#), except for non-solid pins and ISOD where the chamfers shall generally fall within the profiles of [Figure 4a\)](#) and their adequacy shall be checked by the tests of [13.12.5](#). ISODs shall be of generally rectangular cross section. "I" sections are not permitted although castellated cross sections are permitted provided their dimensions conform to [Figure 4b\)](#) and all the other requirements of the standard are met.

The maintenance of these dimensions shall not rely on the terminal screws.

Adaptors fitted with an ISOD shall conform to all the dimensions specified in [Figure 4a\)](#) with the exception of the ISOD width and height dimensions which shall conform to [Figure 4b\)](#).

- 13.2.1** Conformity shall be checked by inspection, measurement and by the use of the gauge shown in [Figure 5](#).

In the case of adaptors with ISODs, where alignment cannot be maintained due to the flexibility of plastic materials, the test given in BS 1363-2:2023, [14.8](#), shall be performed and the maximum withdrawal force from a socket-outlet conforming to BS 1363-2:2023 shall not exceed 36 N.

For the gauging test, intermediate adaptors and adaptor plugs shall be fitted with a 3-core 1.25 mm² flexible cable as given in [BS EN 50525-2-11:2011](#). Non-rewirable intermediate adaptors and adaptor plugs shall be tested as delivered.

With the gauge in an approximately vertical position and the engagement surfaces of the adaptor and the gauge parallel to each other, the line and neutral pins shall be entered into the gauge for a distance not exceeding 2 mm. The adaptor shall then enter the gauge fully when a force of 10 N or less is applied to the centre of the adaptor at right angles to the engagement surface and without any additional force being applied to the pins to bring them into alignment.

- 13.3** No part of a line or neutral pin shall be less than 9.5 mm from the periphery of the adaptor measured along the engagement surface.
- 13.3.1** Conformity shall be checked by measurement.

Figure 4b) — Concave shrinkage allowance for ISODs

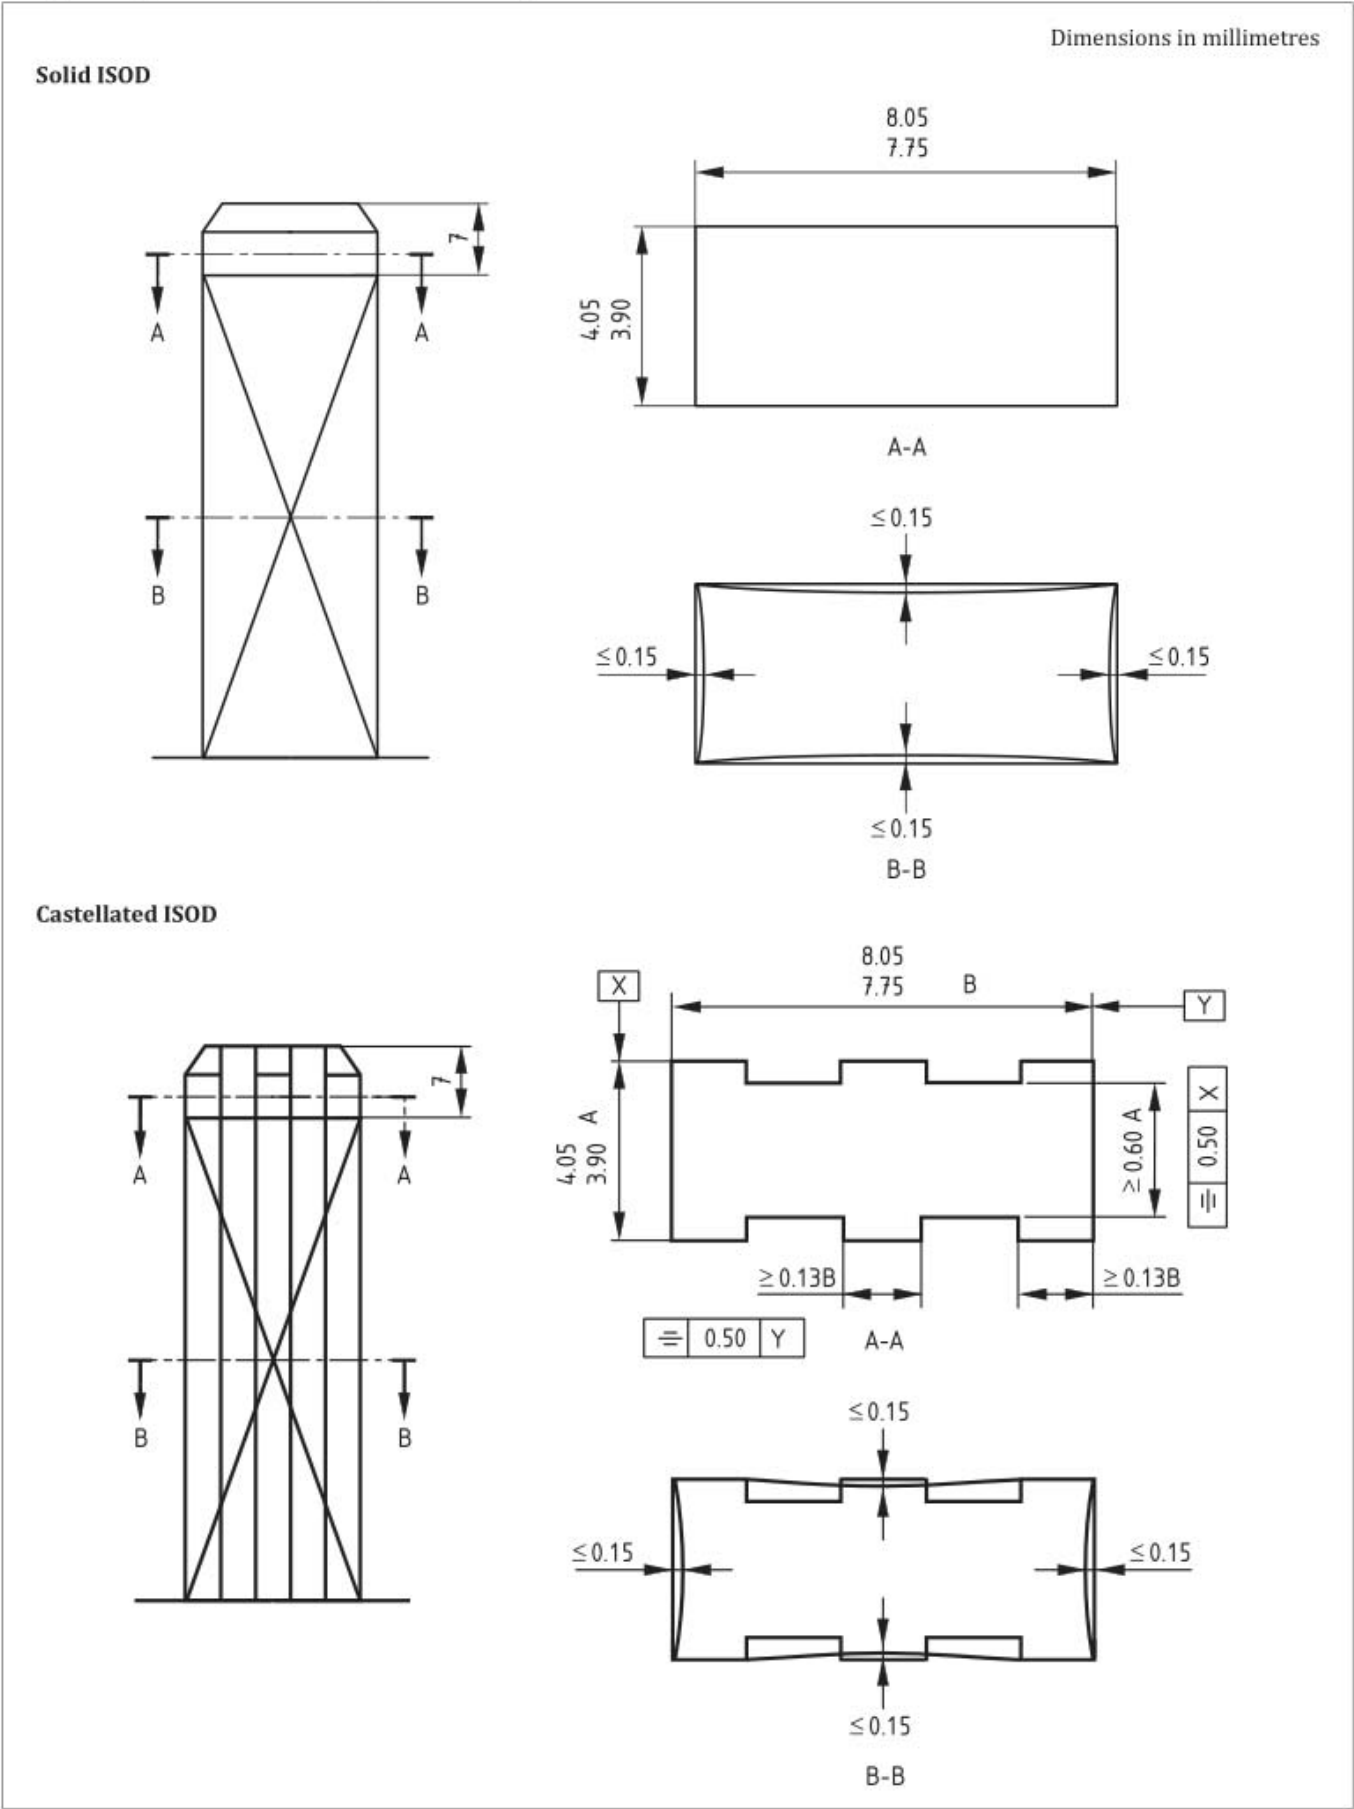


Figure 4b) — Concave shrinkage allowance for ISODs (continued)

NOTE Section A-A to be measured away from the chamfer as shown.

13.4 The provision of fuses in adaptors shall be in accordance with the following.

- a) An adaptor having only one or two adaptor socket-outlets for 13 A plugs conforming only with [BS 1363](#) and having no other adaptor socket-outlets need not be fused.
- b) A multiway adaptor having two adaptor socket-outlets for [BS 1363](#) plugs and one or more adaptor socket-outlets for plugs conforming to other standards, shall either be:
 - 1) provided with only one fuse link which shall have a rated current of 13 A and conform to [BS 1362:1973+A3:2021](#); or
 - 2) provided with a 13 A fuse link, conforming to [BS 1362:1973+A3:2021](#), protecting the BS 1363+A3:2021 adaptor socket-outlets and an appropriate fuse link conforming to [BS 1362:1973+A3:2021](#) or BS 646:1958+A2:2013 protecting all other adaptor socket-outlets.
- c) A multiway adaptor having more than two adaptor socket-outlets for [BS 1363](#) plugs shall be provided with a 13 A fuse link conforming to [BS 1362:1973+A3:2021](#).
- d) A multiway adaptor having one adaptor socket-outlet for a [BS 1363](#) plug and one or more adaptor socket-outlets for plugs conforming to other standards shall be provided with an appropriate fuse link, conforming to [BS 1362:1973+A3:2021](#) or BS 646:1958+A2:2013 to protect the outgoing circuit or circuits. The adaptor socket-outlet for the [BS 1363](#) plug need not be fused.
- e) An adaptor having only adaptor socket-outlets conforming to standards, other than [BS 1363](#) shall be provided with an appropriate fuse link, conforming to [BS 1362:1973+A3:2021](#) or BS 646:1958+A2:2013 to protect the outgoing circuit or circuits.
- f) An adaptor plug or an intermediate adaptor shall be provided with an appropriate fuse link, conforming to [BS 1362:1973+A3:2021](#) or BS 646:1958+A2:2013 to protect the outgoing flexible cable.
- g) A shaver adaptor shall be provided with a 1 A fuse link conforming to BS 646:1958+A2:2013.

When a fuse link is provided within the body of the adaptor it shall be mounted in appropriate contacts only between the line plug pin and the corresponding line socket contact(s) in such a way that it cannot be displaced when the adaptor is in use. The design shall be such that the fuse link cannot be left in inadequate contact when the fuse cover or fuse carrier is replaced and firmly secured in position. It shall be impossible to replace the fuse link in an adaptor unless the adaptor is completely withdrawn from the socket-outlet.

13.4.1 Conformity shall be checked by inspection.

13.5 In non-rewirable intermediate adaptors and adaptor plugs, where the fuse link is retained by means of a fuse carrier, this device shall be either:

- a) non-detachable during normal replacement of the fuse link; or
- b) readily identifiable in relation to its adaptor by means of marking.

13.5.1 Conformity shall be checked by inspection.

- 13.6** For fused adaptors with the fuse carrier or cover removed and the fuse link correctly fitted in the fuse clips, the creepage and clearance distances between live parts of the fuse and clips and the engagement face of the adaptor shall meet the requirements of [9.1](#) and [9.2](#).

13.6.1 Conformity shall be checked by measurement.

- 13.7** The base and cover of non-rewirable intermediate adaptors and adaptor plugs shall be permanently attached to each other, such that the flexible cable cannot be separated without making the portable socket-outlet permanently useless.

An intermediate adaptor and adaptor plug shall be considered to be permanently useless when for reassembling the intermediate adaptor and adaptor plug parts or materials other than the original have to be used.

Such intermediate adaptors and adaptor plugs shall not be able to be opened and re-assembled by hand using the same original fixings or parts using a general-purpose tool, for example a screwdriver.

The use of re-useable fixings of any type, including tamperproof and security screws to secure the base and cover of non-rewirable intermediate adaptors and adaptor plugs shall not be used.

The base and cover of rewirable intermediate adaptors and adaptor plugs shall be firmly secured to each other, such that they cannot be detached from each other without the aid of a tool.


13.7.1 Conformity shall be checked by inspection and for non-moulded on non-rewirable intermediate adaptors and adaptor plugs by the test given in [13.9.1](#).

- 13.8** The base and cover of rewirable intermediate adaptors and adaptor plugs having the cover fixed by screws shall be firmly secured to each other. It shall not be possible to remove the cover unless the adaptor is completely withdrawn from the socket-outlet. Fixing screws shall be captive.

13.8.1 Conformity shall be checked by inspection and by the following test.

Each adaptor cover fixing screw shall have a pull of 60_{-2}^{+0} N exerted on it for 60_{0}^{+5} s whilst the surface temperature of the product is $70\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$. The test shall be carried out using apparatus similar to that shown in [Figure 6](#) and for the test the adaptor cover and apparatus shall be placed in an oven until they reach the required temperature.

At the end of the test, any screw thread shall be serviceable and any insert shall not have moved to such an extent that correct assembly of the adaptor is prevented.

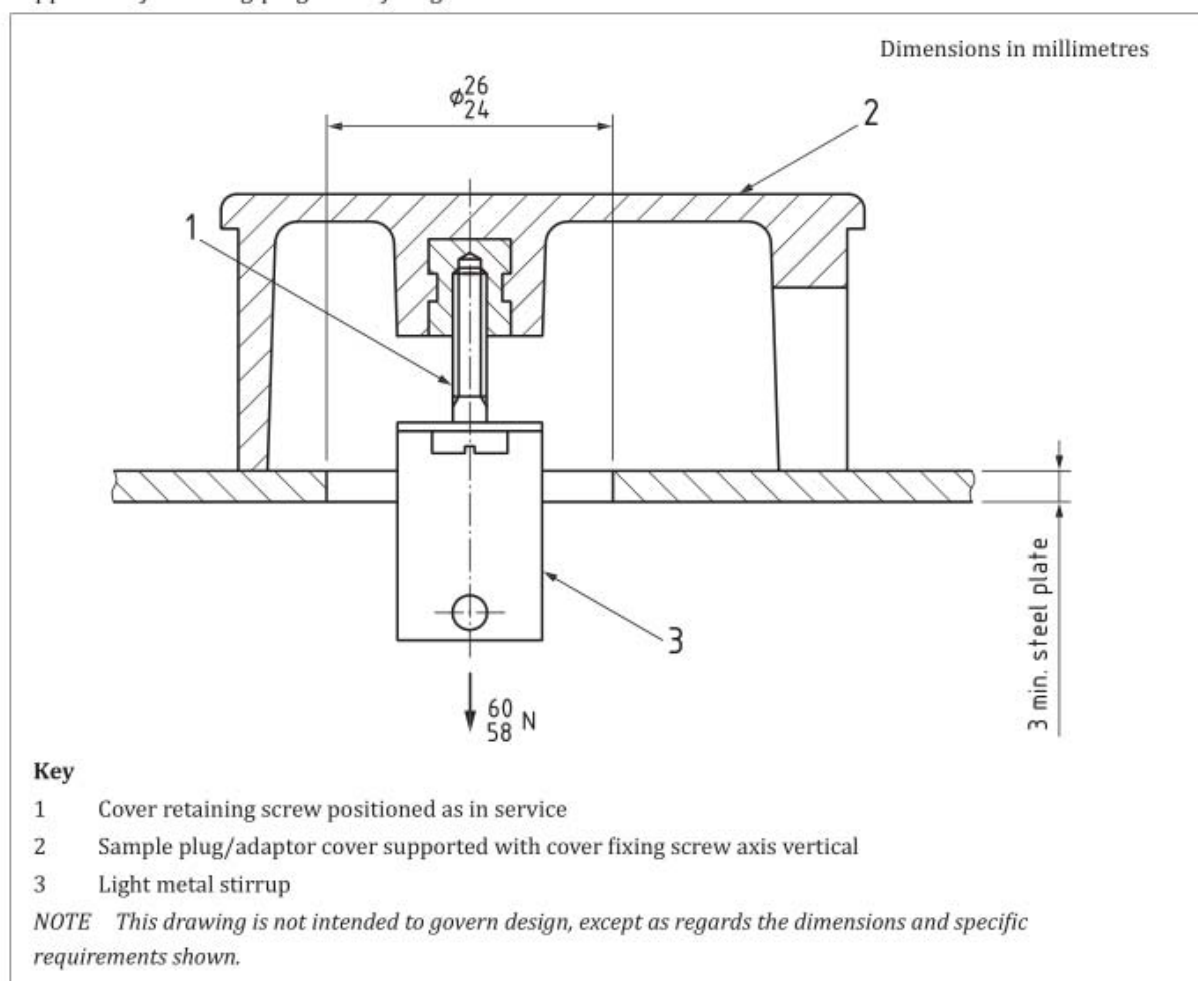Figure 6 — Apparatus for testing plug cover fixing screws

- 13.9** The base and cover of adaptors other than those described in **13.7** and **13.8** shall be firmly secured to each other. It shall not be possible to remove the cover unless the adaptor is completely withdrawn from the socket-outlet.

13.9.1 Conformity shall be checked by inspection and the following test.

All the adaptor pins shall be clamped together in a suitable jig and subjected to a pull of 60_{-2}^0 N whilst suspending the cover by means of a "nest" to suit the adaptor cover profile. The test shall be carried out in an oven at a temperature of $70\text{ °C} \pm 5\text{ °C}$ and the pull applied for 60_{0}^{+5} s after the temperature has been attained.



After the test it shall not be possible to touch live parts with the test pin shown in **Figure 1** applied with a force of 5_{-1}^0 N.

- 13.9.2** Non-moulded-on, non-rewirable adaptors shall be tested with the flexible cable supplied. The adaptor plug pins shall be clamped in the vertical position using a suitable jig with the plug pins uppermost. The plug flexible cable shall be 1 m in length and a weight of $3_{0}^{+0.06}$ kg fixed to the end. With the weight initially held $0.5\text{ m} \pm 0.05\text{ m}$ from the end of the cable anchorage, and at the same height, the weight shall be allowed to fall through an arc of 1 m. This test shall be carried out five times.

After this test the adaptor cover shall be in place and show no damage.

Conformity shall be checked by inspection.

- 13.10** Adaptors shall be so designed and constructed that they cannot readily be deformed to allow access to live parts.
- 13.10.1** Conformity shall be checked by inspection and by the following test.
Immediately after the test described in [Clause 16](#), test probe 11 of [BS EN 61032:1998](#) is applied to the accessible surface of the adaptor with a force of 30_{-5}^0 N. It shall not be possible to touch live parts.
- 13.11** For non-rewirable intermediate adaptors and adaptor plugs means shall be provided to prevent loose strands of a conductor or current carrying parts from reducing the minimum insulation requirements between such parts and all external surfaces of the adaptor.
- 13.11.1** Conformity shall be checked by inspection and by the test described in [16.2](#).
- 13.12** Materials other than brass (having a minimum content of 58% copper) shall not be used in the construction of line and neutral adaptor plug pins except for sleeves of pins as specified in [13.19](#). Adaptor plug pins and ISODs shall conform to [13.13.1](#). Non-solid pins shall conform to [13.12.2](#).
- 13.12.1** All exposed surfaces of the adaptor plug pins shall be smooth and free from burrs or sharp edges and other irregularities which could cause damage or excessive wear to corresponding socket contacts or shutters.
- 13.12.1.1** Conformity shall be checked by inspection.
- 13.12.2** Those surfaces of the non-solid adaptor plug pins which are visible when the adaptor is correctly assembled shall be free of apertures.
- 13.12.2.1** Conformity shall be checked by inspection.
- 13.12.3** All seams and joints of non-solid adaptor plug pins shall be closed over their entire length.
- 13.12.3.1** Conformity shall be checked by inspection and in case of doubt by the following test.
Push a steel test probe of 0.2 mm diameter into all seams and joints. Check that the test probe does not enter into any seam or joint to a depth greater than the thickness of the material from which the plug pin is formed.
- 13.12.4** Adaptor plug pins and ISODs shall have adequate strength to withstand the stresses of normal use.
- 13.12.4.1** For solid pins conformity shall be checked by the following test.
Position a pin on the fixed anvil of the apparatus, as shown in [Figure 32](#), with its contact surfaces in the horizontal plane. Apply a force of $1\ 100_{-10}^0$ N to the movable anvil by any convenient method such that the pin is strained at a rate not exceeding 10 mm/min. The test shall be made separately on the line, neutral and earth pins applying load perpendicular to the major axis surfaces of the pins.

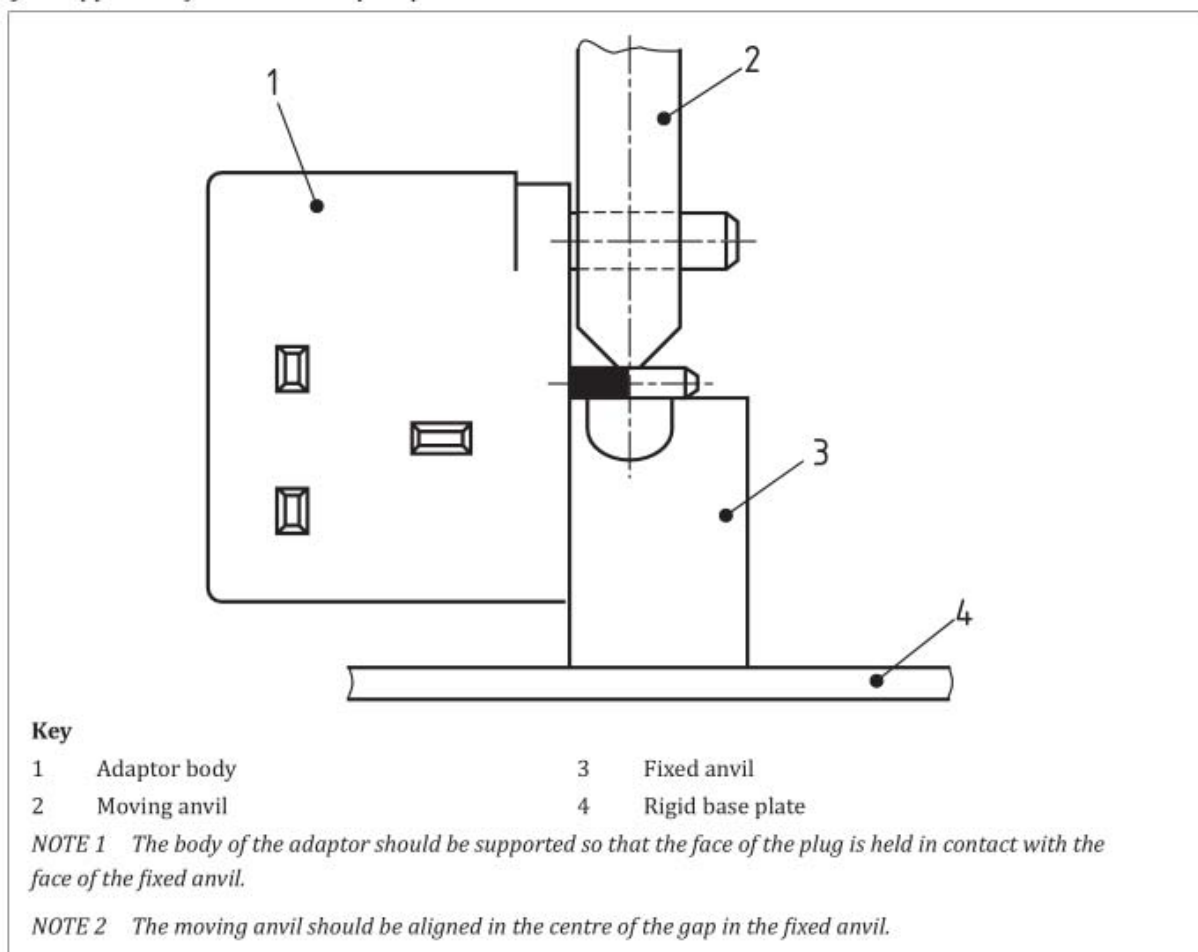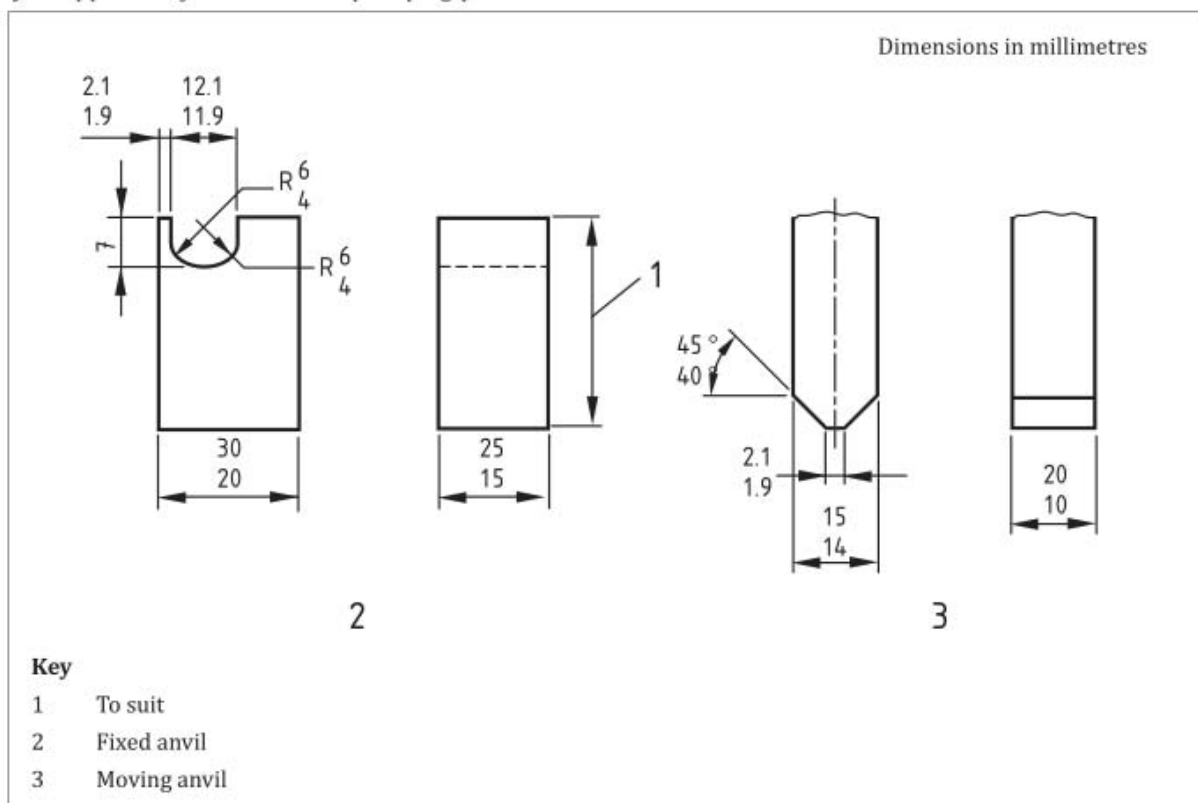Figure 32a) — Apparatus for tests on adaptor pins**Figure 32b)** — Apparatus for tests on adaptor plug pins

After this test the adaptor shall fit the gauge shown in [Figure 5](#) when used in the manner described in [13.2.1](#).

13.12.4.2 For non-solid pins, conformity shall be checked by the following tests.

- a) Position a pin on the fixed anvil of the apparatus, as shown in [Figure 32](#), with its contact surfaces in the horizontal plane. Bring the movable anvil to rest against the upper surface of the pin.

Apply a force of 800_{-10}^0 N to the moveable anvil 50 times without impact.

The test shall be made separately on the line, neutral and earth pins applying the load perpendicular to the major axis surfaces of the pins. If there is a joint or seam in one of the major axis surfaces of a pin then the test shall be made twice. The seam or joint shall face the moving anvil for the first test and shall face the fixed anvil for the second test.

After the test the pins shall conform to [13.12.2](#) and [13.12.3](#) and the adaptor shall fit the gauge shown in [Figure 2](#) when used in the manner described in [13.2.1](#).

- b) Separate samples shall be used for the following test.

Position a pin on the fixed anvil of the apparatus, as shown in [Figure 32](#), with the widest surface in the horizontal plane. Bring the movable anvil to rest against the upper surface of the pin. This quiescent position shall be taken as the datum point. Apply a force to the movable anvil by any convenient method such that the pin is strained at a rate not exceeding 10 mm/min. Measure the applied force when the movement of the anvil from the datum point reaches $1.5_{-0.1}^0$ min. The test shall be made separately on the line, neutral and earth pins applying the load perpendicular to the major axis surfaces of the pins. If there is a joint or seam in one of the major axis surfaces of a pin then the test shall be made twice. The seam or joint shall face the moving anvil for the test and shall face the fixed anvil for the second test. The force shall be not less than 1 100 N.

13.12.4.3 For ISODs, conformity shall be checked by the following test.

Position the ISOD on the fixed anvil of the apparatus as shown in [Figure 32](#) with the widest surface in the horizontal plane. Bring the moveable anvil to rest against the upper surface of the ISOD. The quiescent position shall be taken as the datum point. Apply a force to the moveable anvil by any convenient method such that the ISOD is strained at a rate of 10 mm/min ± 2 mm/min.

A force of 400_{-0}^{+10} N shall be applied and the measured deflection shall not exceed 1.5 mm. The ISOD shall not be broken or show cracks that are visible with normal or corrected vision without additional magnification.

After the test the adaptor plug pins shall fit the [Figure 4](#) gauge when used in the manner described in [13.2.1](#) with a force not exceeding 20 N.

When testing an adaptor fitted with an ISOD due to the flexibility of plastic materials some additional alignment of the ISOD is allowed when inserting into the [Figure 5](#) gauge. Where alignment cannot be maintained, the test of BS 1363-2:2023, [13.9](#), shall be performed and the maximum withdrawal force from a socket-outlet conforming to BS 1363-2:2023 shall not exceed 36 N.

- 13.12.5** Adaptors with non-solid pins and/or ISODs shall not cause excessive wear to socket contacts or shutters of socket-outlets in accordance with BS 1363-2:2023. For adaptors with non-solid pins, conformity shall be checked by [13.12.5.1](#). For adaptors with ISODs, conformity shall be checked by [13.12.5.2](#).

13.12.5.1 Conformity shall be checked by the following tests.

The test shall be carried out with adaptors with non-solid pins and three different types of new socket-outlets in accordance with BS 1363-2:2023. Two types of the socket-outlet shall have the

shutters operated by the earth pin, one of which is preferably operated by all three pins and one of which is preferably operated by live and neutral pins only.

The combination of rewirable adaptors having non-solid pins and each type of socket-outlet as described shall make and break a current of $13\text{ A} \pm 0.4\text{ A}$, non-rewirable adaptors shall be tested with the rated current appropriate to the flexible cable given in Table 2, at $250\text{ V} \pm 10\text{ V a.c.}$ 15 000 times (30 000 movements) in a substantially non-inductive circuit.

Each adaptor shall be inserted into and withdrawn from the socket-outlet at a rate of six insertions and six withdrawals per minute, the speed of travel of the adaptor being approximately 150 mm/s. The period during which the adaptor is inserted and withdrawn shall be approximately equal. The adaptor pins shall be renewed or a new adaptor shall be used after each 5 000 insertions and withdrawals. For the purpose of this test, no lubrication shall be applied to the pins of the adaptor or the socket-outlet contacts.

After the test the shutters of the socket-outlets shall be operating satisfactorily, the socket contacts shall be safely shielded and the socket-outlets shall be in accordance with BS 1363-2:2023, 10.1, 17, 16, 14.4.1a), 11.2, 14.6, 14.7, and 14.8, with the permitted values of voltage drop specified in BS 1363-2:2023, 14.4.1a) for the adaptor pin to socket contact measurements increased by 50%. The pins of the adaptor shall remain intact with no openings in the surface, joints or seams which will accept the probe specified in 13.12.3.

13.12.5.2 Conformity shall be checked by the following.

Using a selection of three different makes of rewirable plugs conforming to BS 1363-1:2023 and three different makes of unswitched socket-outlets conforming to BS 1363-2:2023, selected to represent different earth contact designs, the earth resistance between the earthing adaptor plug pin and the earthing socket contact of the socket-outlets shall be established in accordance with BS 1363-2:2023, 11.2.1b).

All socket-outlets shall be of the type where the earth pin or ISOD of an adaptor inserted into the socket-outlet operates the shutter mechanism.

The test shall be made using a separate sample of adaptor plug with ISOD for each type of socket-outlet, with each sample being inserted into and withdrawn from the socket-outlet at a rate of six insertions and six withdrawals per minute, the speed of travel of the adaptor plug being approximately equal. For the purpose of this test no lubrication shall be applied to the adaptor plug pins or socket-outlet contacts either prior to or during the test.

After 5 000 insertions and withdrawals, the standard rewirable adaptor used prior to the test for each type of socket-outlet shall be reinserted and the earth resistance test repeated. After the test the earth resistance between the earthing adaptor plug pin and the earthing socket contact of the socket-outlets shall be in accordance with BS 1363-2:2023, 11.2.1b).

The socket-outlet shall be examined and shall show no sign of damage that would impair further use. The adaptors under test shall show no damage and shall conform to the dimensional requirements of this standard.


After the test, the shutters of the socket-outlet shall operate satisfactorily and the socket contacts shall be safely shielded.

13.12.6 Adaptor plug pins and ISODs (if any) shall have adequate mechanical strength to ensure that they cannot be distorted by twisting.

13.12.6.1 Conformity shall be checked by inspection and by the following test.

The adaptor shall be clamped in a block as shown in Figure 33. Each pin shall be twisted about its longitudinal axis by applying a torque of $1 \text{ Nm} \pm 10\%$ for 60^{+5}_0 s . The torque tube and its position on the plug pin shall be as shown in Figure 33. After each pin has been separately twisted the adaptor shall fit the gauge shown in Figure 5. The test shall then be repeated with each adaptor plug pin being twisted in the opposite direction to that of the first test. After this second test the adaptor shall fit the gauge shown in Figure 5. In each case the gauge is used in the manner as described in 13.2.1.

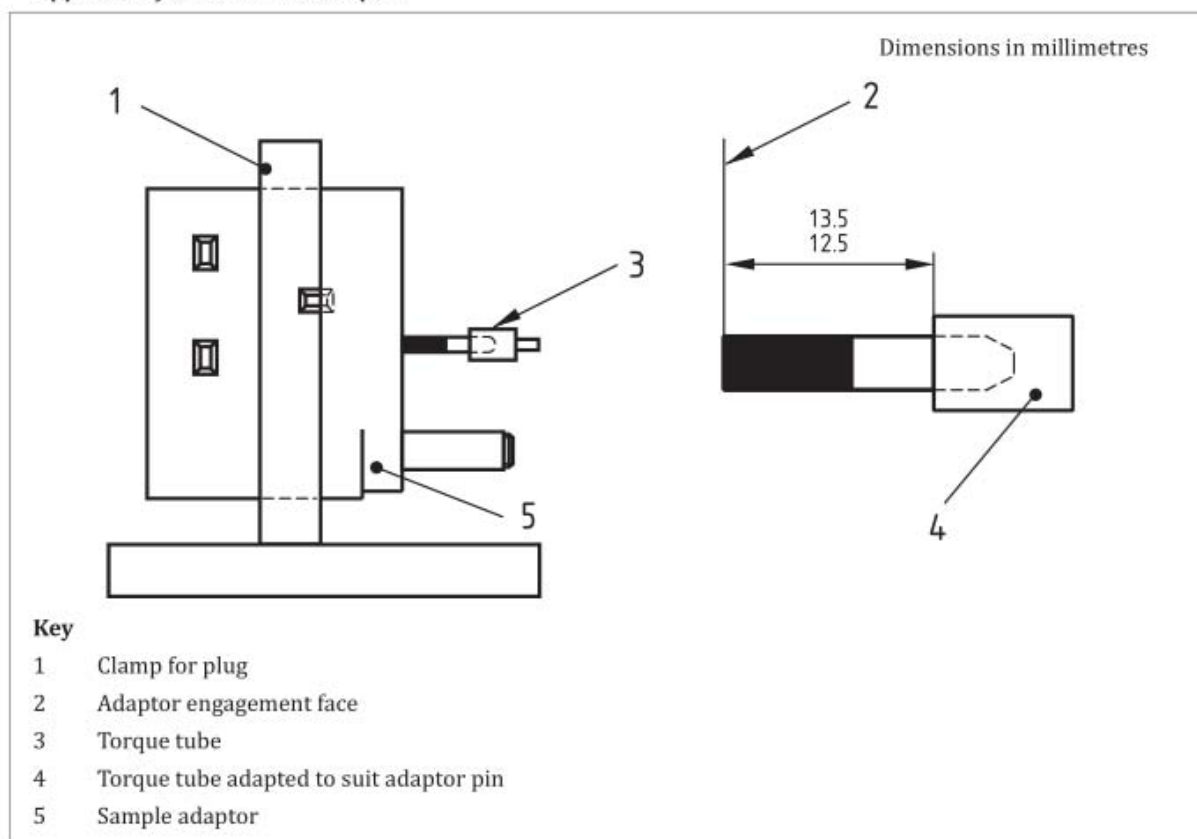Figure 33 — Apparatus for torsion test on pins



- 13.13** The socket contacts and any terminals or terminations shall be formed as one piece with or shall be permanently connected to the pin in such a way that efficient electrical connection is made that cannot work loose in use. This connection shall not be made by means of a screw.

The contact for the fuse link, if any, shall be connected to the line socket contact and any line terminal or termination shall be formed in one piece with the socket contact and the fixed part of any terminal or termination. Alternatively, it shall be permanently connected in such a way that efficient electrical connection is made that cannot work loose in normal use, and the other contact for the fuse link shall be similarly connected to the corresponding adaptor plug pin. These connections shall not be made by means of screws.

- 13.13.1** Conformity shall be checked by inspection and the tests described in 21.1.5 and Clause 17.


- 13.14** Adaptors shall be so designed that when fully assembled the pins are adequately retained in position such that there is no likelihood of them becoming detached from the adaptor during normal use.

- 13.14.1** Conformity shall be checked by the following test.

After the tests described in Clause 21, each pin shall be subjected for 60^{+5}_0 s to a pull of 100^{+5}_0 N in one smooth and continuous movement in the direction of the major axis. The adaptor shall be mounted using the steel plate shown in Figure 7. The apparatus shall be placed within an oven and

the pull shall be applied at least 1 h after the adaptor body has attained the test temperature of $70\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ while maintained at this temperature.

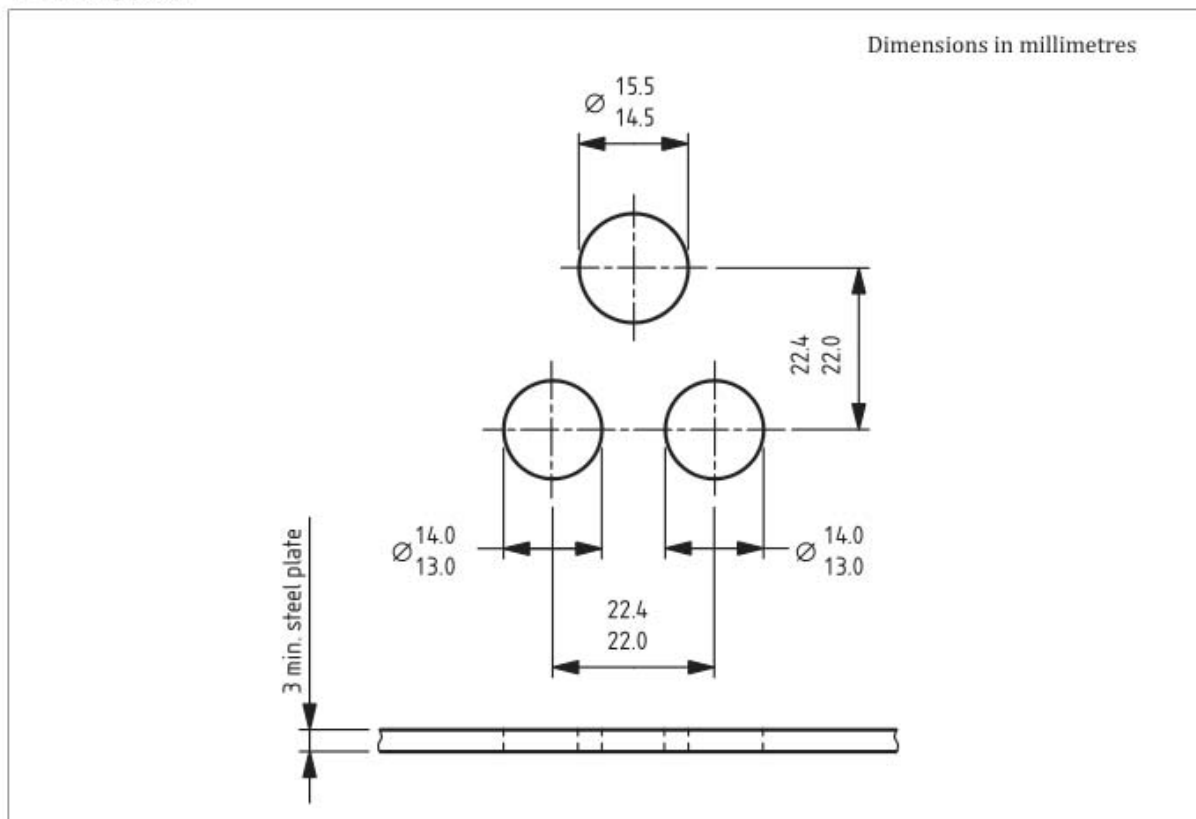
Figure 7 — *Mounting plate*



After the test the adaptor pin shall fit the gauge shown in [Figure 5](#) when used in the manner as described in [13.2.1](#).

- 13.15** The degree of flexibility of mounting of the adaptor plug pins or the angular movement of the pins in the base shall be not greater than $3^{\circ} 30'$ in the directions shown in [Figure 8](#) from an axis which is perpendicular to the plug engagement surface when the pins are subjected to a force as shown in [Figure 8](#).

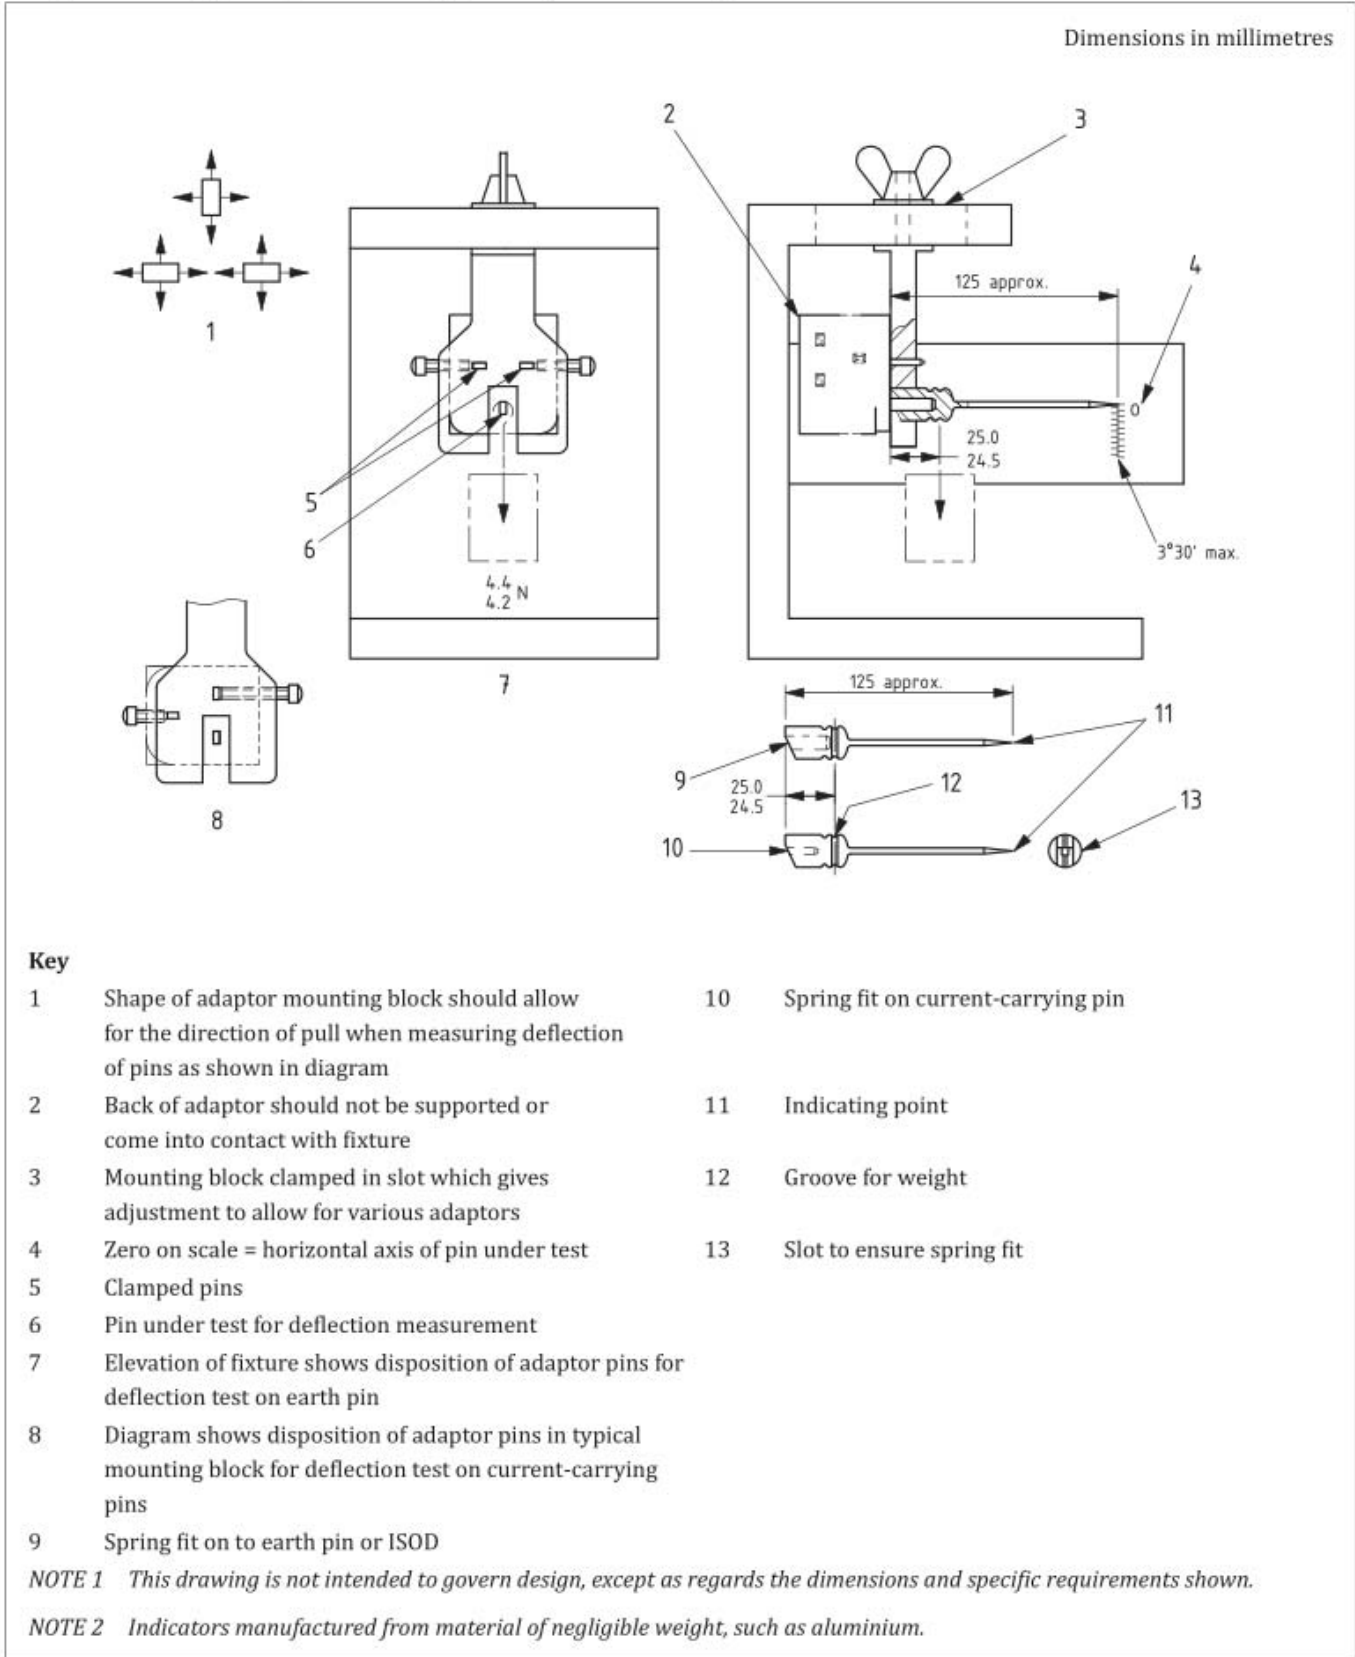Figure 8 — Plug pin deflection test apparatus for resilient adaptors



13.15.1 Conformity shall be checked by inspection and in case of doubt by the following test.

NOTE Adaptors may be checked using an apparatus similar to that shown in [Figure 8](#). (Other methods of measuring the 3° 30' deflection may be used.)

The adaptor shall be clamped in the mounting block by means of any two of the adaptor plug pins in such a manner as to ensure that the engagement surface of the adaptor, from which the adaptor plug pins project, is supported and in contact with the corresponding flat surface of the mounting block. The back of the adaptor shall not be supported and shall not come into contact with the fixture. The axis of the clamped pins shall be horizontal.

The unclamped pin shall be tested for declination from the horizontal by applying a force of $4.4_{-0.2}^0$ N, $25_{-0.5}^0$ mm from the engagement surface of the adaptor and parallel with it in the four directions shown in [Figure 8](#). The test shall be repeated in turn on the other two pins of the adaptor. During each test the declination from the horizontal measured on the scale shall not exceed $3^{\circ} 30'$. After all tests have been completed the adaptor shall fit the gauge shown in [Figure 2](#) when used in the manner as described in [13.2.1](#).

- 13.16** Suitable means shall be provided for withdrawing the intermediate adaptor or adaptor plug without subjecting the flexible cable to stress.
- 13.16.1** Conformity shall be checked by inspection.
- 13.17** Non-rewirable intermediate adaptors and adaptor plugs shall be fitted with flexible cables in accordance with [20.4](#).
- 13.17.1** Conformity shall be checked by inspection.
- 13.18** Conductive component parts of adaptors shall be so located and separated that, in normal use, they cannot be displaced so as to affect adversely the safety or proper operation of the adaptor.
- 13.18.1** Conformity shall be checked by inspection and manual manipulations.
- 13.19** Line and neutral adaptor plug pins shall be fitted with insulating sleeves. The dimensions of the pin and sleeve shall fall within those given in [Figure 4a](#)) and [Figure 4b](#)). Sleeves shall not be fitted to any earthing adaptor plug pin.
- 13.19.1** Conformity shall be checked by inspection and by measurement for pin and sleeve and use of the gauge shown in [Figure 5](#) as described in [13.2.1](#) for socket-outlet compatibility.
- 13.20** Adaptor plug pin sleeves shall have adequate electric strength, resistance to abrasion and resistance to deformation due to overheating of pins.
- 13.20.1** Conformity shall be checked by the tests given in [13.20.2](#), [13.20.3](#) and [13.20.4](#).
- 13.20.2** A 50 Hz voltage of substantially sinusoidal waveform shall be applied between each L and N pin and a thin metal strip of between 5.5 mm and 6 mm width wrapped around the base of the adaptor plug pin sleeve adjacent to the base of the adaptor. Initially not more than 500 V shall be applied, the voltage then being raised to $1\,250\text{ V} \pm 30\text{ V}$ which is maintained for 60_{-0}^{+5} s.
- During the test no breakdown or flashover shall occur.
- 13.20.3** The test apparatus for resistance to abrasion (see [Figure 9](#)) shall comprise a horizontally disposed beam pivoted about its centre point. A short length of steel wire, $1\text{ mm} \pm 0.02\text{ mm}$ in diameter and bent into a "U" shape, the base of the "U" being straight, with no surface defects, shall be rigidly attached at both ends to one end of the beam so that the straight part of the wire projects below the beam and is parallel to the axis of the beam pivot.
- The adaptor shall be held in a suitable clamp as shown in [Figure 9](#) in such a position that the straight part of the steel wire rests upon the adaptor plug pin at right angles to it and the adaptor plug pin

slopes downward at an angle between 5° and 10° to the horizontal. The beam shall be loaded so that the wire exerts a force of $4_{-0.1}^0$ N on the pin.


The adaptor shall be moved backwards and forwards in a horizontal direction in the plane of the axis of the beam so that the wire rubs along the pin. The length of the pin abrasion shall be approximately 9 mm, of which approximately 7 mm is over the insulating sleeve.

The adaptor shall be moved 10 000 times in each direction (20 000 movements) at a rate of 25 to 30 movements per minute.


The test shall be made on one pin of each adaptor.

After the test the sleeve shall show no damage which might impair the further use of the adaptor. The sleeve shall not have been penetrated or creased and shall satisfy the tests described in 13.20.2, any abraded brass contamination on the sleeve having been removed.

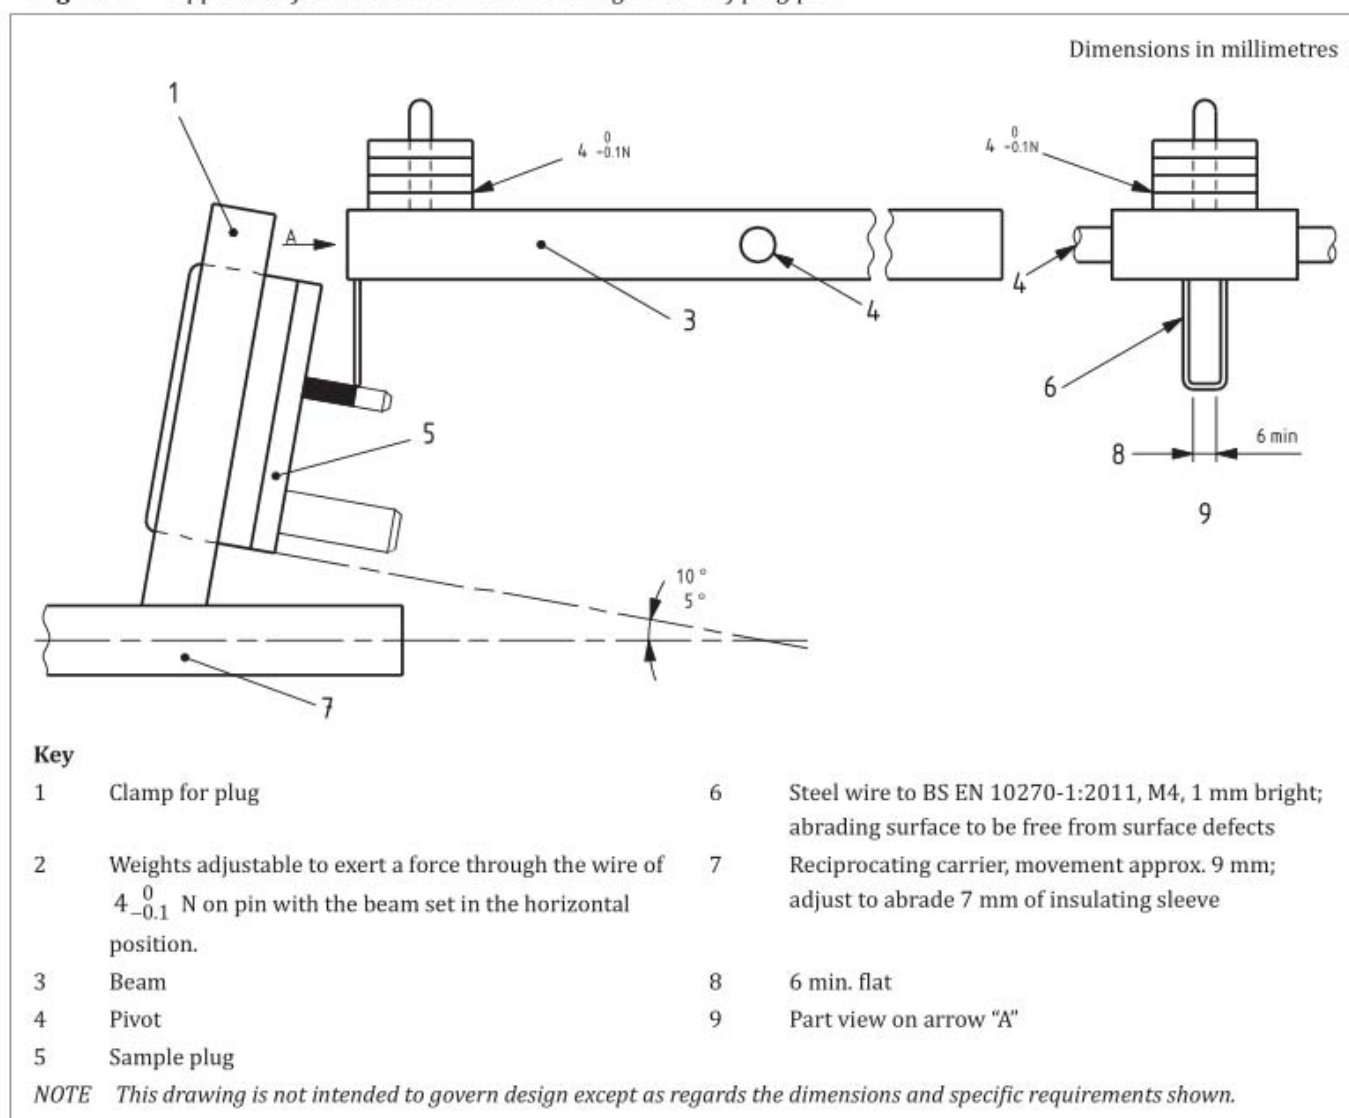Figure 9 — Apparatus for abrasion test on insulating sleeves of plug pins



13.20.4 A set of three sample pins shall be tested by means of the apparatus shown in Figure 10 which has a blade $0.70_{+0.05}^0$ mm wide and a radius of $3 \text{ mm} \pm 0.1 \text{ mm}$. The test shall be made on one pin of each adaptor not used for the test described in 13.20.3.

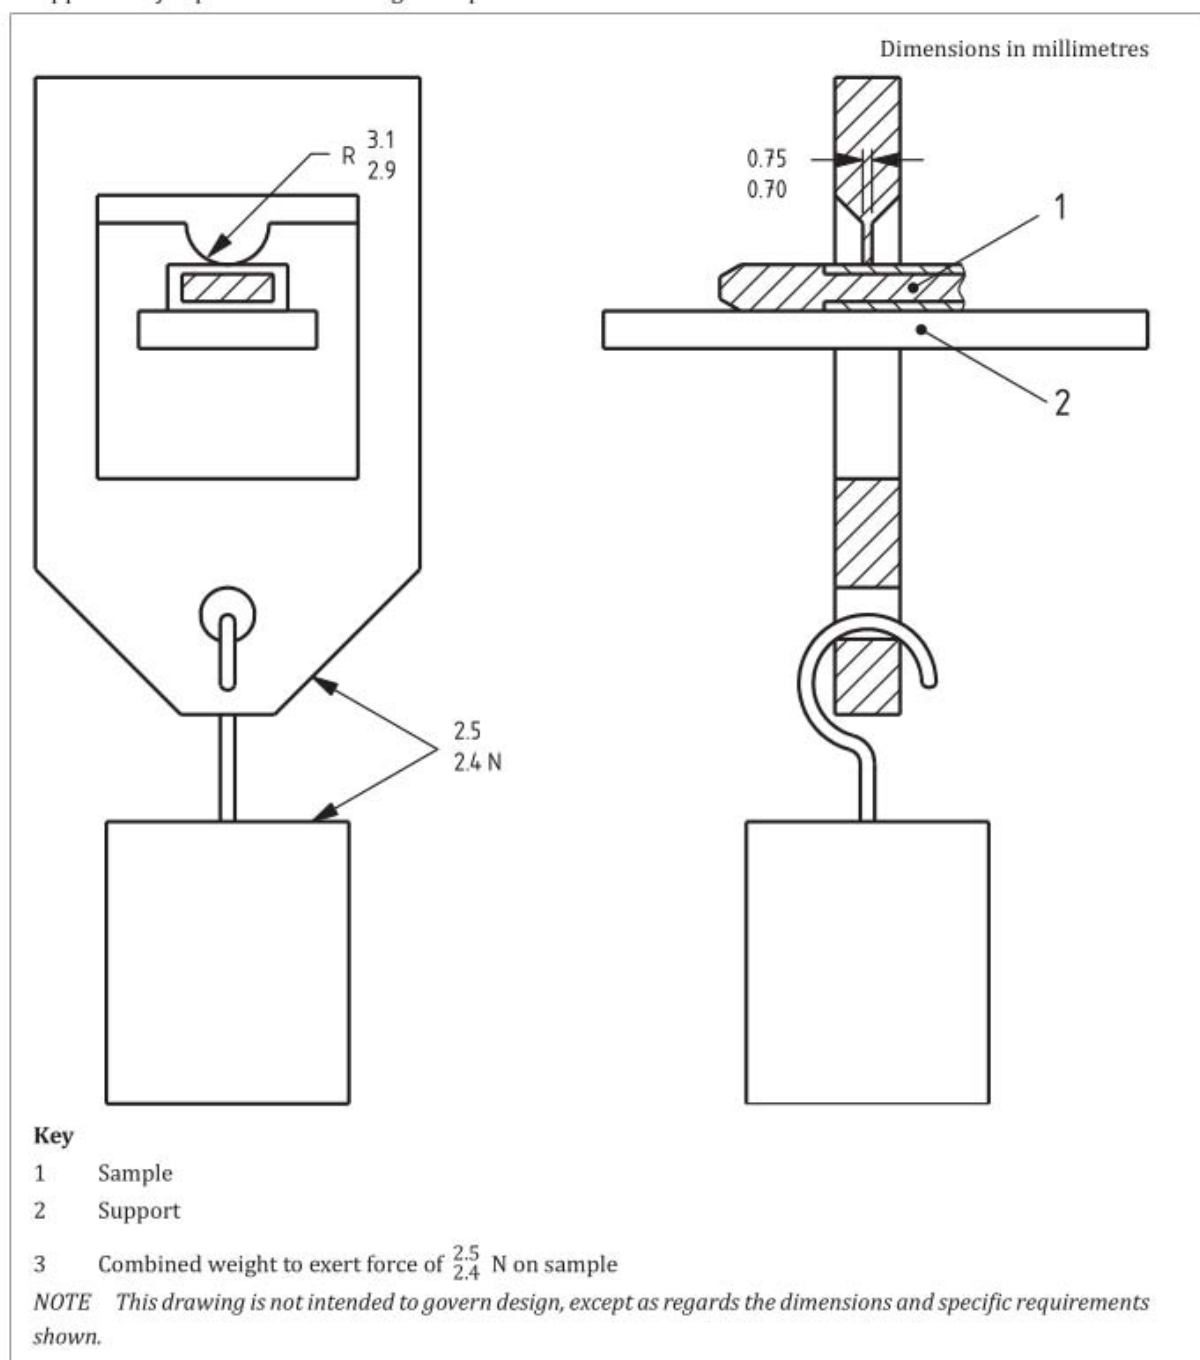Figure 10 — Apparatus for pressure test at high temperature

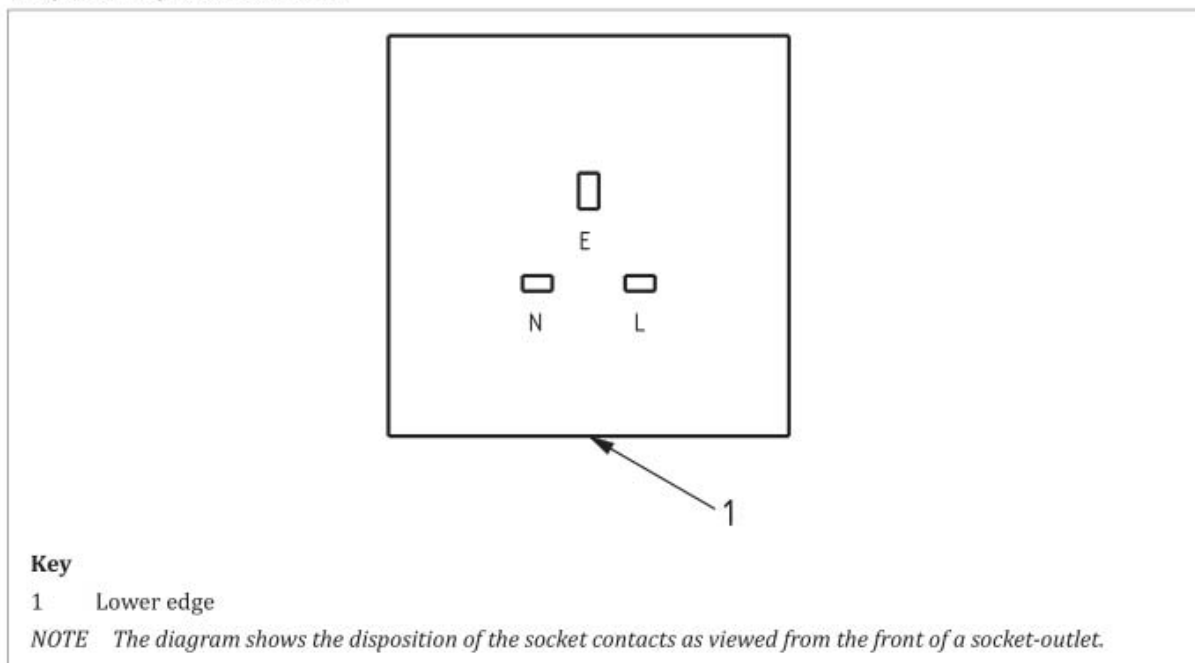
A sample shall be positioned as shown in [Figure 10](#) and the apparatus shall be loaded so that the blade exerts a force of $2.5_{-0.1}^{0}$ N on the sample. The apparatus, complete with sample, shall be placed in a heating cabinet at 200_{-8}^{0} °C for a period of 120_{-5}^{0} min, after which the sample is removed and immediately cooled by immersion in water at approximately room temperature.

The thickness of the insulation remaining at the point of impression shall be measured and shall not have been reduced by more than 50%.

14 Construction of adaptors (adaptor socket-outlet portion)

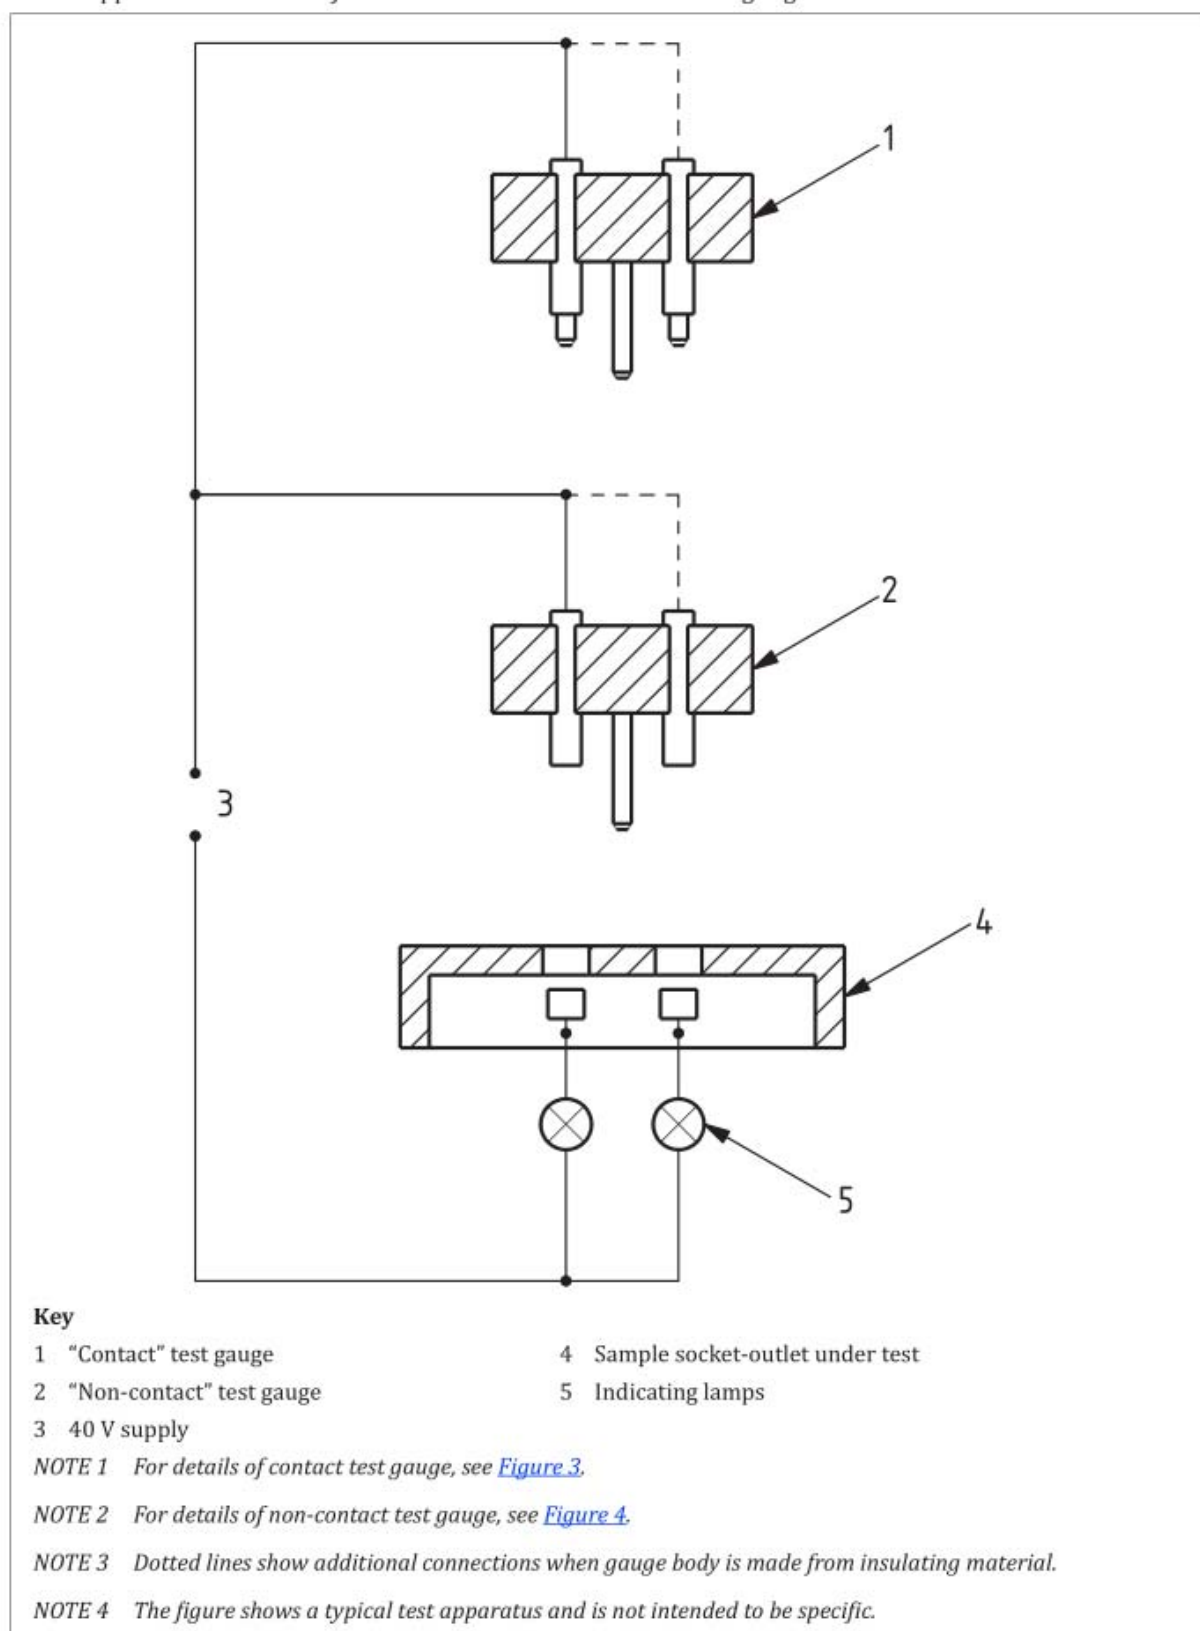
- 14.1** For adaptors with adaptor socket-outlets for [BS 1363](#) plugs, the disposition of the socket contacts shall be as shown in [Figure 3](#).

Figure 3 — Disposition of socket contacts



There shall be no projection on the engagement surface of the adaptor such as shall prevent the full insertion of an appropriate plug. The spacing of the socket contacts shall correspond with that of the plug pins as specified in BS 1363-1:2023.

- 14.1.1** Conformity shall be checked by inspection and the use of the gauge shown in [Figure 11](#).
If raised marking is used, it shall not project more than 0.5 mm from the engagement surface and shall allow conformity with [14.2](#).
- 14.2** For adaptors with adaptor socket-outlets for [BS 1363](#) plugs the line and neutral socket contacts in adaptors shall be positioned so as to make satisfactory contact with the corresponding pins of a plug in all positions that the contact might occupy when the plug is correctly and fully inserted.
- 14.2.1** Conformity shall be checked by inspection and the use of the gauge shown in [Figure 12](#) and the circuit shown in [Figure 13](#). Both indicator lamps shall light.

Figure 13 — Test apparatus and circuit for use with contact and non contact gauges

- 14.3** For adaptors with adaptor socket-outlets for [BS 1363](#) plugs, on insertion of a plug into an adaptor, the travel of the end of either current carrying pin from the front face of the adaptor to the first point of

contact with the appropriate socket contact, in any position the socket contacts might occupy, shall be not less than 9.6 mm.

- 14.3.1** Conformity shall be checked by inspection and the use of the gauge shown in [Figure 4](#) and the circuit shown in [Figure 13](#). Neither indicator shall light.

- 14.4** For adaptor socket-outlets intended to accept plugs conforming to other standards, the disposition and dimensions shall enable reliable and safe interconnection and there shall be no projection on the engagement surface of the adaptor such as would prevent the full insertion of a plug. The spacing of the socket contacts shall correspond with that of the plug pins.

Raised marking is permitted provided it does not project more than 0.5 mm from the engagement face.

NOTE Apertures may be shaped at their front edges to facilitate insertion of plugs.

- 14.4.1** Conformity shall be checked by inspection and measurement and the requirements in the appropriate standards.


- 14.5** Socket contacts of adaptors shall be self-adjusting as to contact making and each socket contact shall be such as to make and maintain, in normal use, effective electrical and mechanical contact with a corresponding plug pin. The means for producing the contact pressure shall be associated with each socket contact independently and shall not rely on any insulating material in contact with the socket contact.

- 14.5.1** Conformity shall be checked by inspection and, except for shaver adaptors, by the tests given in [14.5.2](#) and [14.5.3](#), as appropriate.

- 14.5.2** The voltage drop between any individual line or neutral socket contact and the corresponding plug pin shall be measured between the terminal connecting strap at a point immediately adjacent to the socket contact and the corresponding plug pin. Other than when tested in accordance with [19.1.2](#) and [19.1.3](#), the voltage drop shall not exceed 25 mV at rated current.

- 14.5.3** For adaptor socket-outlets for [BS 1363](#) plugs, the withdrawal pull of a gauge as shown in [Figure 16a](#)) for individual earth socket contacts and in [Figure 16b](#)) for individual line or neutral socket contacts shall be checked whilst ensuring that neither the shutter mechanism, nor any insulating material in contact with the socket contact has any effect on the results of the test. The socket contact shall retain the gauge for not less than 30 s when the socket-outlet is held horizontally with the gauge hanging vertically downwards.

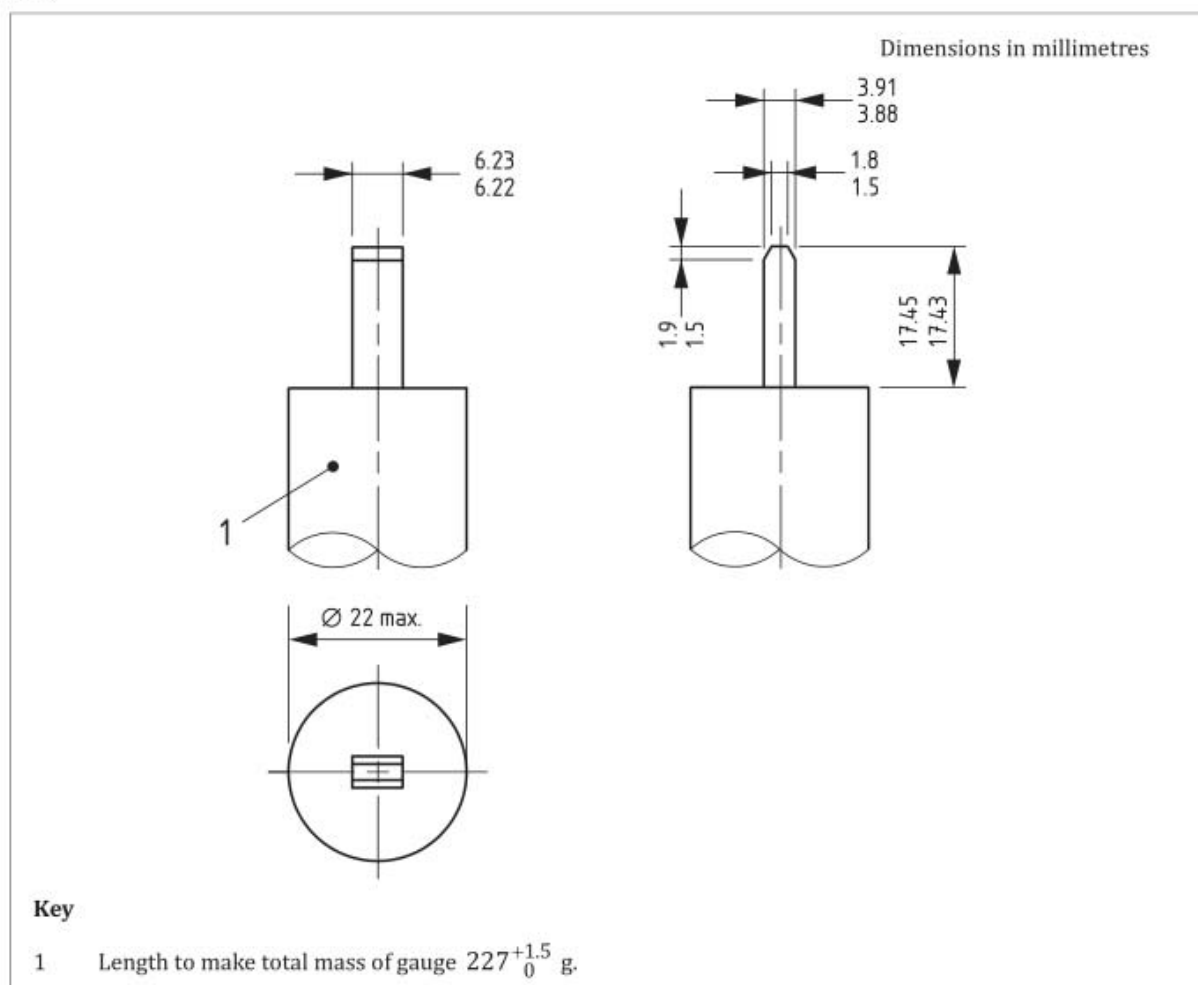Figure 16b) — *Withdrawal pull gauges for effectiveness of contact: Gauge for line and neutral current carrying socket contacts*



Adaptor socket-outlets for plugs conforming to BS 546:1950 shall be checked using the gauge shown in BS 546:1950, Figure 2 as shown in BS 546:1950, Table 17. The individual line or neutral socket contact shall be checked whilst ensuring that neither the shutter mechanism, nor any insulating material in contact with the socket contact has any effect on the results of the test. The socket contact shall retain the gauge for not less than 30 s when the socket-outlet is held horizontally with the gauge hanging vertically downwards.

Adaptor socket-outlets for plugs conforming to standards other than BS 1363 and BS 546:1950 shall be tested in accordance with the relevant clauses of their appropriate standards.

- 14.6** The construction of adaptors shall be such as to allow for easy withdrawal of a plug from the socket-outlets.

A plug is inserted into and withdrawn from the socket-outlet 10 times with the adaptor mounted as in normal use.

- 14.6.1** Conformity shall be checked by the following test.

An appropriate plug having pins of maximum dimensions on nominal centres is inserted into and withdrawn from the socket-outlet 10 times with the adaptor mounted rigidly.

For shaver adaptors three types of plug shall be used, as specified in Clause 19.

Any grease from the plug pins and socket contacts shall be removed prior to the tests.

Each socket-outlet of the adaptor shall be tested in turn.

The plug is then inserted into the adaptor socket-outlet and a force is gradually exerted in a direction parallel to the axis of the pins. For shaver outlets and for adaptor socket-outlets for BS 1363 plugs it shall not be possible to reach a pull of 36 N without the plug coming out of the adaptor socket-outlet.

For adaptor socket-outlets for plugs conforming to other standards, the maximum force shall be that specified in the appropriate standard.

- 14.7** The construction of the adaptor shall be such that when a plug is withdrawn from it the current carrying socket contacts are automatically screened by shutters. The shutter shall be operated either by the insertion of the earthing pin or by the simultaneous insertion of any two or more pins of the plug, provided that any one corresponding single pin inserted into any current carrying socket aperture shall not open the shutter. One socket aperture shutter shall not be capable of closing independently of the other aperture shutter. Conformity shall be checked by the tests of 14.7.1.

It shall not be possible to operate a shutter by inserting a 2-pin plug into a 3-pin socket-outlet. Conformity shall be checked by the tests of 14.7.2.

- 14.7.1** Conformity shall be checked by inspection, before and after the test described in Clause 19, and by the application of the corresponding single pin applied to the shutter using a force of $5_{-0.1}^0$ N. The test pin shown in Figure 1 is then applied to the shutter using a force of $5_{-0.1}^0$ N applied perpendicular to the engagement surface of the socket-outlet.

It shall not be possible to touch current carrying parts.

- 14.7.2** Earth pin operated shutters and 3-pin operated shutters shall be deemed to conform to this requirement without testing. For other shutter designs, conformity shall be checked by the following test.

A 2-pin plug conforming to BS EN 50075 shall be applied to the socket line and neutral apertures with a force of 30_{-2}^0 N. The plug pins, when applied in any direction, shall not make contact with live parts.

- 14.8** For adaptors with adaptor socket-outlets for BS 1363 plugs, apertures for the reception of the line and the neutral plug pins shall not exceed 7.2 mm × 4.8 mm and for the earthing pin 8.8 mm × 4.8 mm.

NOTE Apertures may be shaped at their front edges to facilitate insertion of plugs conforming to BS 1363-1:2023.

Earth socket contacts may be flush with the front face of enclosure, but shall not depend for their effectiveness on insulating material of the enclosure. In such a case the aperture shall be measured between the contact faces at the maximum separation.

- 14.8.1** Conformity shall be checked by inspection and measurement.

- 14.9** For adaptors with adaptor socket-outlets for BS 1363 plugs, no part of the aperture intended for the reception of the line or neutral pin shall be less than 9.5 mm from the periphery of the accessible external surface of a socket-outlet except that when a shutter is operated by the simultaneous insertion of the current carrying pins this dimension shall be increased to 18 mm from the lower edge of the socket-outlet portion.

Where the 9.5 mm and 18 mm dimensions include a peripheral edge radius, it shall not exceed 1 mm.

- 14.9.1** Conformity shall be checked by inspection and measurement.

- 14.10** Adaptors with associated plugs and cables shall not impose undue strains on fixed socket-outlets.

- 14.10.1** Except for shaver adaptors, conformity shall be checked by the following tests.

- a) Adaptors with three adaptor socket-outlets for BS 1363 plugs shall be fitted with the following:
- 1) one device and counterweight, simulating a plug and 1 m of 1.5 mm² 3-core flexible cable in the outlet giving the most onerous condition. See Figure 35 (load 2); and
 - 2) two devices and counterweights, simulating plugs and 1 m of 0.75 mm² 3-core flexible cable on the remaining outlets. See Figure 35 (load 1).

Figure 35 — Simulated plug and cable devices

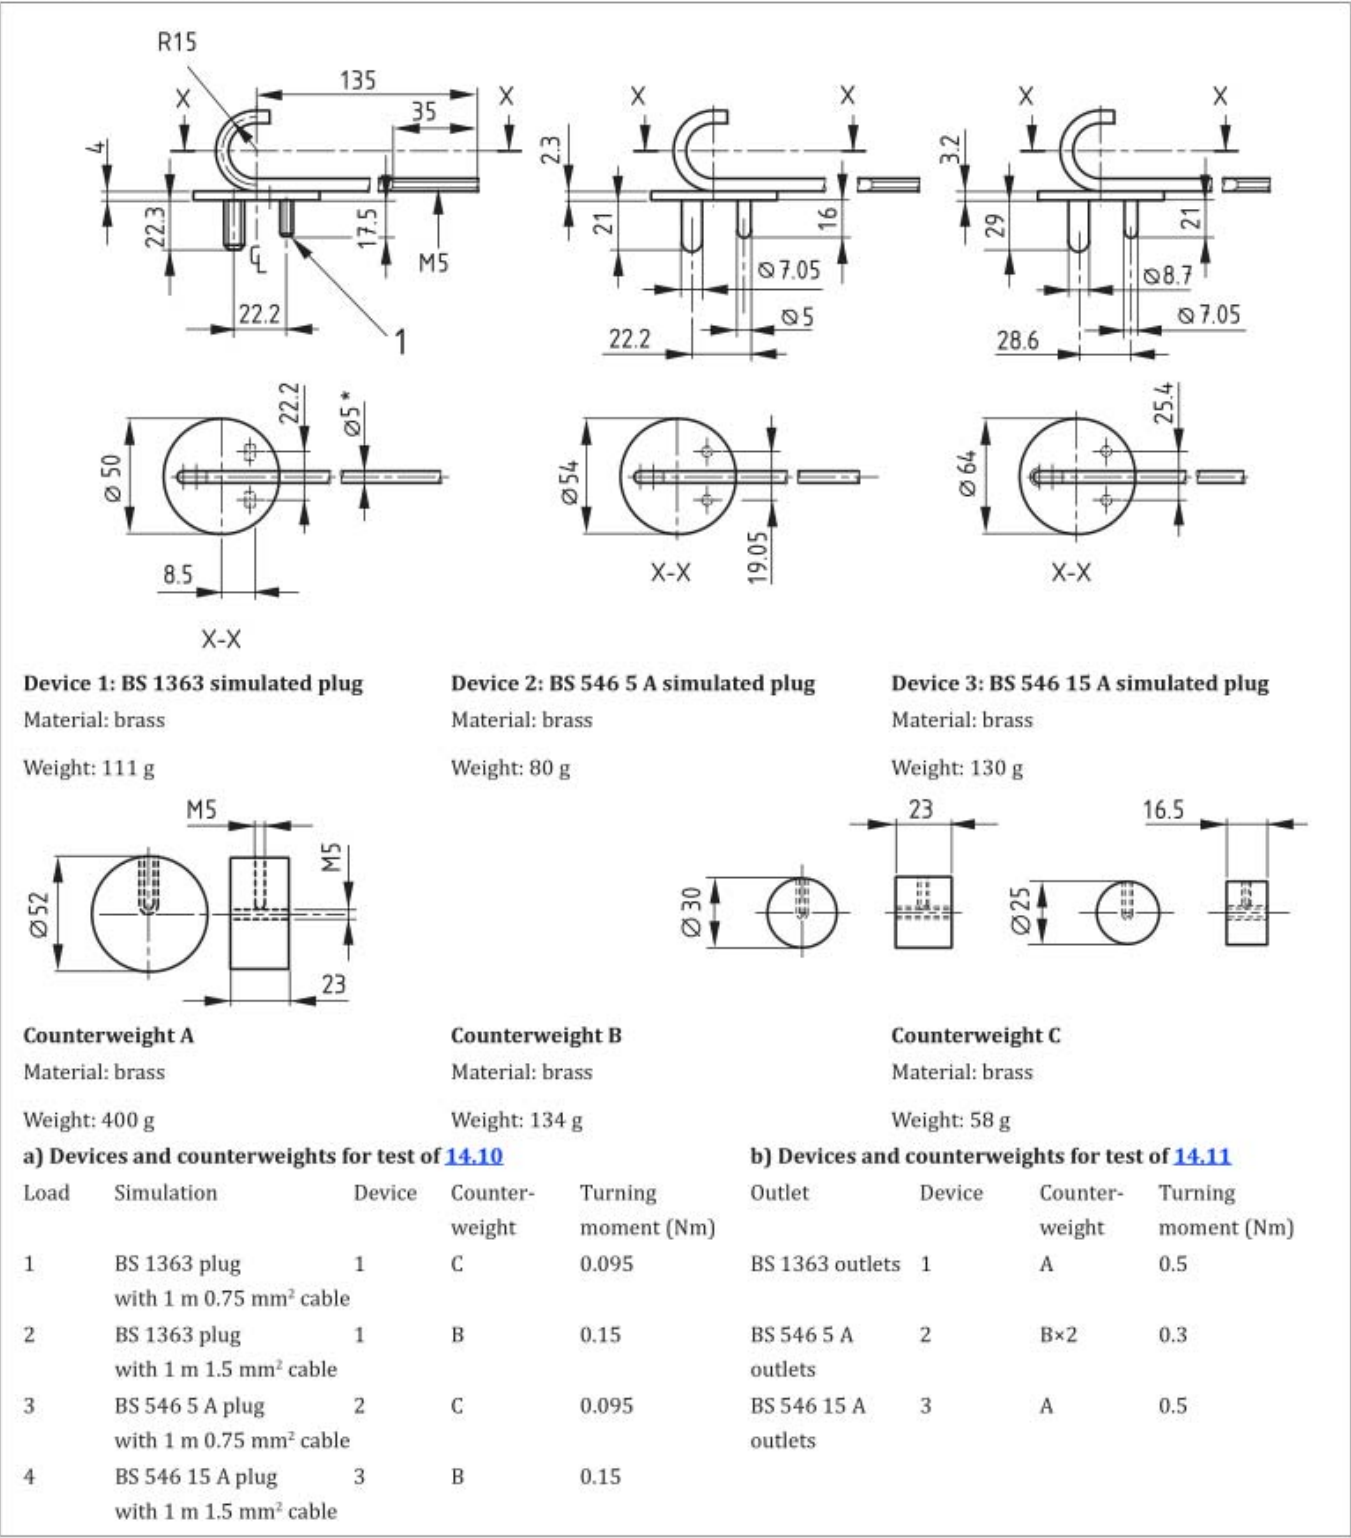


Figure 35 — *Simulated plug and cable devices (continued)***Key**

1 Standard pins; braze to disc

* Ø5 rod as shown; braze to disc

NOTE 1 Device dimensions should approximate closely to those given so that subsequent adjustments can be made resulting in weights within $\pm 1\%$ of the values given.

NOTE 2 Pin dimensions and centres should be to appropriate standards.

NOTE 3 Turning moments are taken through X to X with pins pointing downwards. Turning moment values should be within $\pm 1\%$.

b) Adaptors with two adaptor socket-outlets for [BS 1363](#) plugs shall be fitted with the following:

- 1) one device and counterweight, simulating a plug and 1 m of 1.5 mm² 3-core flexible cable in the outlet giving the most onerous condition. See [Figure 35](#) (load 2); and
- 2) one device and counterweight, simulating a plug and 1 m of 0.75 mm² 3-core flexible cable in the remaining outlet. See [Figure 35](#) (load 1).

Other adaptors shall be fitted with a complete complement of appropriate devices and counterweights shown in [Figure 35](#) (load 3 or load 4) (for [BS 546:1950](#) outlets), or if no appropriate device is described, then a plug fitted with 1 m of flexible cable suitable for the current rating of the plug shall be fitted. Intermediate and adaptor plugs shall be fitted with 1 m of appropriate flexible cable.

The total mass shall not exceed 800 g.

NOTE 1 Devices as shown in [Figure 35](#) may be modified to suit particular adaptors, provided the mass/turning moment characteristics remain unchanged.

NOTE 2 A suitable device for calibrating simulated plugs is shown in [Figure 36](#).

The adaptor with devices and counterweights or plugs and flexible cables as described in item a) shall be inserted into a socket-outlet conforming to BS 1363-2:2023. The socket-outlet shall be pivoted about its horizontal axis, 8 mm behind the engagement face and parallel with it, with its centre equidistant from pin centres. The additional torque which has to be applied to the socket-outlet to maintain the engagement face in the vertical plane shall not be greater than 0.7 Nm. Flexible cables, if any, shall hang freely during the test.

NOTE 3 A device for checking this requirement is shown in [Figure 37a\)](#) and [Figure 37b\)](#).

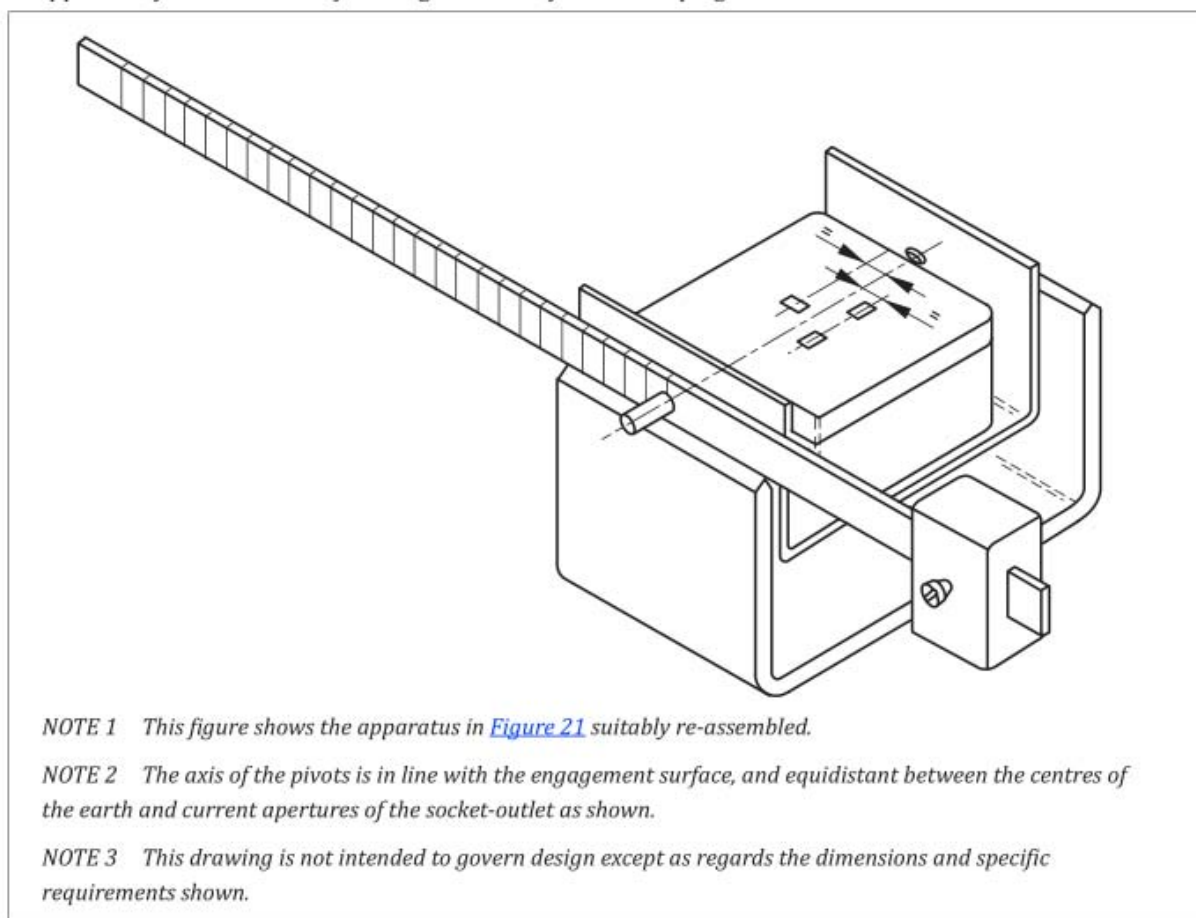
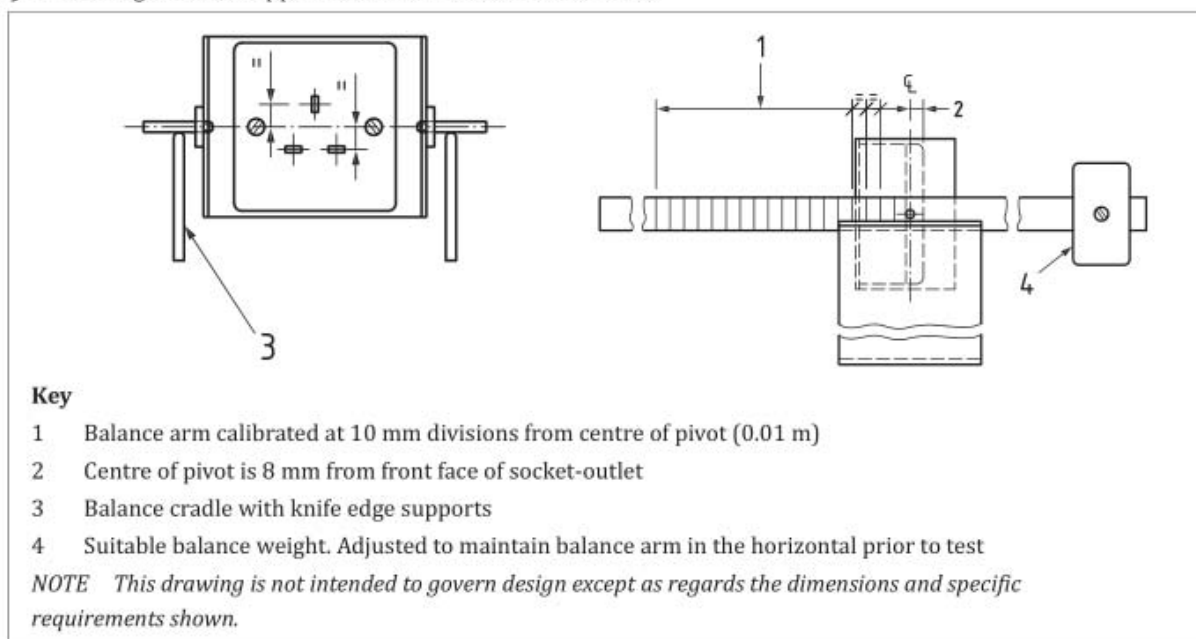
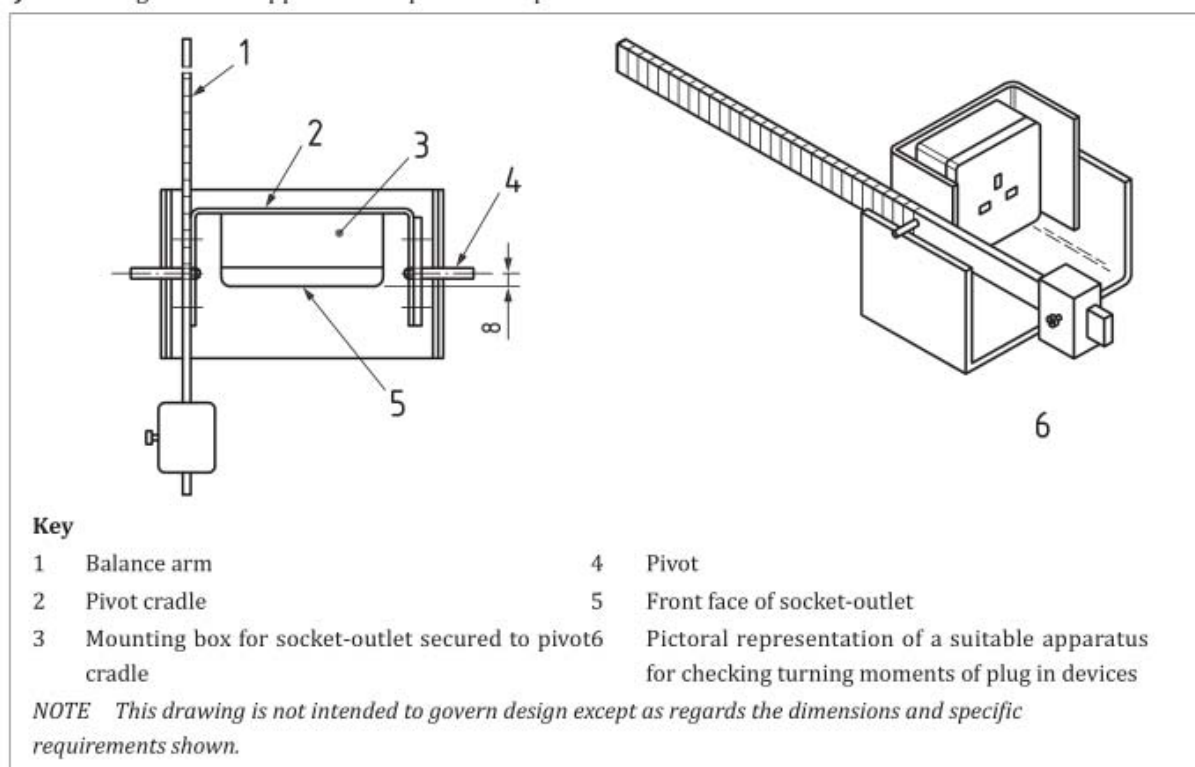
Figure 36 — Apparatus for calibration of turning moment of simulated plug**Figure 37a)** — Turning moment apparatus: Front view and side view

Figure 37b) — Turning moment apparatus: Top view and pictorial overview

14.10.2 Adaptors with socket-outlets on the same plane shall have a maximum of two outlets. The outlets shall be on the horizontal plane only, and shall be on the same centreline as the plug-pins of the adaptor. The vertical centre of the outlets shall be equally spaced from the vertical centre of the plug-pins and each outlet shall be no more than 30 mm from the vertical centre of the plug-pins.

14.11 Adaptor socket-outlet contacts shall withstand the strain imposed on them by associated plugs and cables.

14.11.1 Conformity shall be checked for adaptor socket-outlets for plugs conforming to [BS 546:1950](#) and [BS 1363](#) by the following test, except for shaver adaptors and adaptor socket-outlets for plugs conforming to [BS 546:1950](#) of 2 A rating.

The adaptors shall be rigidly mounted with the axis of plug pins horizontal and the earth pin uppermost. The appropriate device and counterweight shown in [Figure 35](#) shall be fully inserted into the adaptor outlet being tested and removed after 1 min. The adaptor is turned through 90° on the mounting surface with the plug pin axis still horizontal and the device and counterweight fully inserted. The test is made four times, the adaptor being moved 90° after each insertion and removal. During the test the device and counterweight shall not come out.

After the test, the adaptor shall show no damage within the meaning of this standard and the contacts shall retain for not less than 30 s the relevant weight gauges shown in [Figure 16a\)](#) and [Figure 16b\)](#) for adaptor socket-outlets for [BS 1363](#) plugs when the face tested is held horizontally and the weight gauges are hanging vertically downwards. For adaptor socket-outlets for plugs conforming to [BS 546:1950](#) the gauges of Figure 27 and [BS 546:1950](#), Table 19 shall be used. The test shall be repeated for each adaptor socket-outlet.

- 14.12** Switches shall be so constructed that undue arcing cannot occur when the switch is operated slowly. The switch shall disconnect at least the line circuit. Double pole switches shall make and break each pole with one movement of the actuator.

The adaptor switch shall not be used to switch incorporated electronic components other than an indicator lamp.

- 14.12.1** Conformity shall be checked by inspection and by the following test.

Following the test described in [18.1.3](#), the circuit is broken a further 10 times, each time moving the actuating member by hand over a period of approximately 2 s in a manner such as to attempt to stop the moving contact in an intermediate position causing arcing. The actuating member shall be released after approximately 2 s and any arcing shall cease.

- 14.12.2** The actuating member of a switch at rest shall take up a position corresponding to that of the moving contacts except those having a single push-button where the actuating member might take up a single rest position. The actuating mechanism shall be so constructed that when operated the switch might remain only in a position giving adequate contact or adequate separation of contacts.

- 14.12.2.1** Conformity shall be checked by inspection and by the test of [14.12.3](#).

- 14.12.3** The necessary force F to switch off shall first be measured and the force shall be applied to the extremity of the actuating member.

With the actuating member of the switch in the closed position, for single pole switches the fixed and moving contacts shall be mechanically fixed together. For double pole switches the three samples shall be prepared as follows.

- The fixed and moving contacts of one pole shall be mechanically fixed together and the actuating member of the switch tested.
- The fixed and moving contacts of the other pole shall be mechanically fixed together and the actuating member of the switch tested.
- The fixed and moving contacts of both poles shall be mechanically fixed together and the actuating member of the switch tested.

The method for fixing the contacts shall not unduly affect the test result. The test sample might be dismantled where necessary in preparation for this test and the test sample and components shall not be damaged during this preparation.

The actuating member shall be subjected to a test force as defined in [Table 7](#). This force shall be applied in one smooth and continuous motion to the extreme point of the actuating member in the most favourable direction to open the contacts for a period of 10 s.

If locking means are designed to lock the actuating members in opened position, it shall not be possible to lock the actuating members in this position while the force is applied.

After the test and when the test force is no longer applied, the actuating member shall not remain at rest in the "off" position.

Table 7 — Actuator test force

| Type of actuator | Test force | Minimum test force | Maximum test force |
|------------------|------------------|--------------------|--------------------|
| | | N | N |
| Switch actuator | 3F ^{A)} | 50 | 150 |

NOTE The use of grease and the like are not considered to be a mechanical fixing means.

^{A)} *F* is the normal operating force in new condition. The test force shall be 3*F* with the stated minimum and maximum values applied.

- 14.13 Electronic components incorporated in adaptors shall conform to [Annex A](#).
- 14.13.1 Conformity shall be checked by inspection of component conformity evidence and the tests of [Annex A](#).

15 Resistance to ageing and to humidity

15.1 Resistance to ageing

Adaptors shall be resistant to ageing.

- 15.1.1 Conformity shall be checked by the following test.

The adaptors shall be subjected to a test in a heating cabinet with an atmosphere having the composition and pressure of the ambient air and ventilated by natural circulation.

The temperature of the cabinet shall be kept at 70 °C ±5 °C.

The samples shall be kept in the cabinet for 168⁺²₀ h.

NOTE 1 The use of an electrically heated cabinet is recommended.

NOTE 2 Natural circulation may be provided by holes in the walls of the cabinet.

After the treatment, the samples are removed from the cabinet and kept at room temperature and relative humidity for 1 h; following which they are examined and shall show no damage which would:

- a) lead to non-conformity with this standard;
- b) impair safety; or
- c) prevent further use.

15.2 Resistance to humidity

Adaptors shall be resistant to humid conditions which might occur in normal use.

- 15.2.1 Conformity shall be checked by the humidity treatment described below followed within 20 min by the measurement of the insulation resistance and by the electric strength test specified in [Clause 16](#).
- Rewirable intermediate adaptors and adaptor plugs shall be fitted with 1 000 mm ±50 mm of 3-core 1.25 mm² PVC cable as given in [BS EN 50525-2-11:2011](#). Non-rewirable adaptors shall be tested with 1 000 mm ±50 mm of the flexible cable with which they are supplied, measured from the centre of the earth pin.
- Vitrified ceramic material, which after 24 h immersion in water has not increased in mass by more than 0.5% after all the moisture has been removed from its surface, shall not be subjected to further tests, providing the resistance to water of the material does not depend on glaze or varnish.
- To suit the ambient conditions at the time of test, a convenient temperature, *T* (°C) between 20 °C and 30 °C, shall be chosen as a reference temperature. The sample shall be brought to a temperature of between *T* °C and *T* +4 °C and then placed in a humidity cabinet containing air with a relative

humidity maintained between 85% and 95%. The temperature of the air where the samples are placed shall be kept within ± 2 °C of the chosen value T .

The sample shall be kept in the cabinet for 48^{+1}_0 h.

NOTE 1 In most cases, samples can be brought to the chosen temperature by keeping them at this temperature for at least 4 h before the humidity treatment.

NOTE 2 A relative humidity of between 85% and 95% can be obtained by placing in the humidity cabinet a saturated solution of potassium nitrate (KNO_3) or sodium sulfate (Na_2SO_4) in water having a sufficiently large contact surface with the air.

In order to achieve the specified conditions, there shall be constant circulation of the air within the cabinet and, in general, a thermally insulated cabinet shall be used.

The tests described in [Clause 16](#) shall be made in the humidity cabinet or immediately after removal of the sample from the cabinet in a room where the specified temperature is maintained. Inspection shall not reveal any damage to the sample which would impair its use or safety within the requirements of this part of [BS 1363](#).

16 Insulation resistance and electric strength

16.1 The insulation resistance and electric strength of adaptors shall be adequate.

16.1.1 Conformity shall be checked by the tests given in [16.1.2](#) and [16.1.3](#).

16.1.2 The insulation resistance shall be measured using a d.c. voltage of 500^{+250}_0 V, the measurement being made for 60^{+5}_0 s after application of the voltage. The insulation resistance shall be measured consecutively between:

- a) line and neutral terminals/terminations;
- b) line and neutral terminals/terminations connected together and:
 - 1) a metal foil in contact with the entire accessible external surface;
 - 2) the earthing terminal/termination;
 - 3) any metal part of a cable anchorage;
- c) each switched pole of a switched adaptor and corresponding plug pin, with the switch contact open.

The insulation resistance shall be not less than the following:

- i) 5 M Ω between parts of opposite polarity;
- ii) 5 M Ω between parts of opposite polarity connected together, and other parts, including earthed metal, intended to be insulated from them;
- iii) 2 M Ω across switch contacts with the switch open, where applicable.

Indicators and incorporated electronic components shall be disconnected before making this test.

Where terminals/terminations are not directly accessible, e.g. in non-rewirable intermediate adaptors and adaptor plugs, these tests shall be made using accessible parts, e.g. pins known to be connected to the terminations.

16.1.3 A 50 Hz voltage of substantially sinusoidal waveform is applied as described in [16.1.2](#). Initially, not more than 1 000 V is applied, the voltage is then raised to 2 000 V ± 60 V. The high voltage source used shall be such that when the output is adjusted to 2 000 V ± 60 V for 60^{+5}_0 s, and is then short-

circuited, the output current is not less than 200 mA. Any overcurrent protection shall not operate at a current less than 100 mA.

During the test no flashover or breakdown shall occur.

Glow discharges without a drop in voltage shall be ignored.

Indicators and incorporated electronic components shall be disconnected before making this test.

- 16.2** Non-rewirable intermediate adaptors or adaptor plugs shall withstand a high voltage test, for which the test voltage shall be alternating (50 Hz to 60 Hz), applied between all current carrying parts connected together and a conducting electrode in contact with the entire outer accessible surface, omitting the engagement face. This test shall be carried out at 6 000 V \pm 100 V for a period between 3 s and 5 s.

During the test no flashover or breakdown shall occur.

Glow discharges without a drop in voltage shall be ignored.

17 Temperature rise

- 17.1** Adaptors and their surroundings shall not attain excessive temperatures in normal use.


- 17.1.1** Conformity shall be checked by the following tests.

For adaptors with adaptor socket-outlets for BS 1363 plugs, the standard test plug described in Annex G shall be used.

For adaptors with adaptor socket-outlets for other plugs, e.g. those conforming to BS 546:1950, appropriate plugs fitted with 1 000 mm \pm 50 mm of appropriate PVC insulated flexible cable as specified in BS EN 50525-2-11:2011, to suit the maximum current rating of the plugs, shall be used.

For shaver adaptors the test plug as detailed in Figure 34 fitted with 1 000 mm \pm 50 mm of twin circular 0.5 mm² flexible cable (see BS EN 50525-2-11:2011) shall be used.

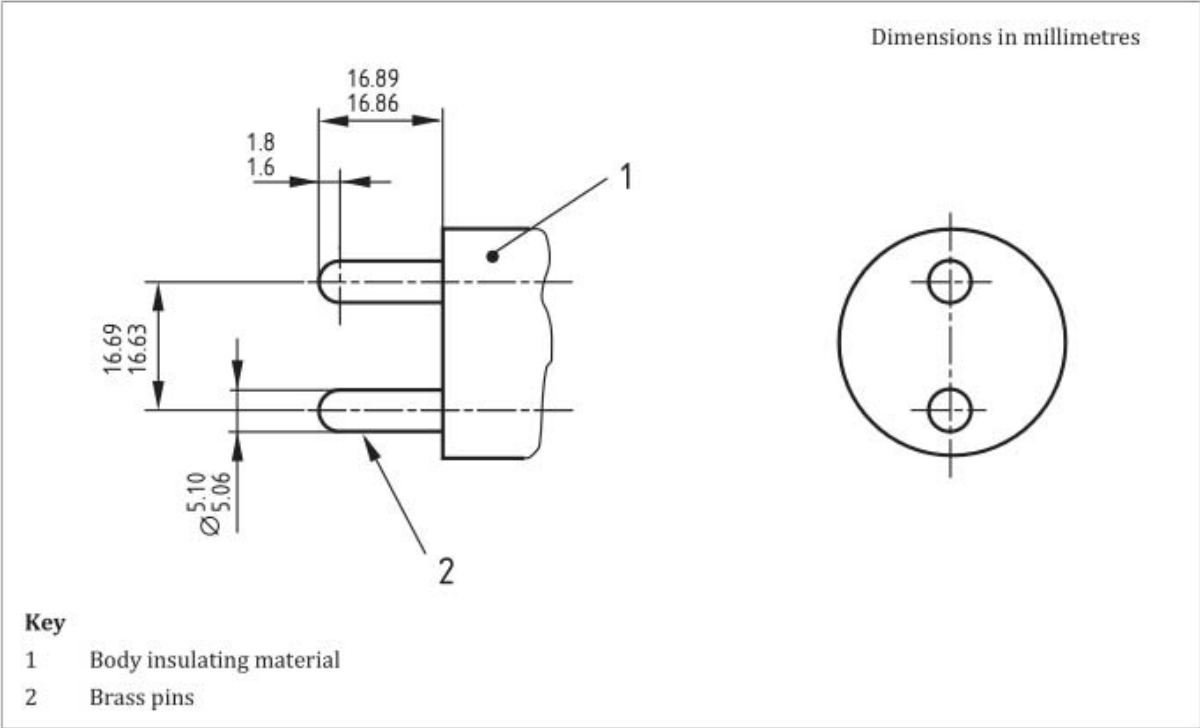Figure 34 — Test plug



Non-rewirable intermediate adaptors shall have the cable supplied cut to 1 000 mm \pm 50 mm length. Rewirable intermediate adaptors shall be fitted with 1 000 mm \pm 50 mm of 1.25 mm² PVC insulated flexible cable (see [BS EN 50525-2-11:2011](#)) having the appropriate number of cores. The L in and L out cores shall be linked at their extremity to provide a normally closed path.

Adaptor plugs shall be tested with 1 000 mm \pm 50 mm of 1.25 mm² 3-core PVC insulated flexible cable (see [BS EN 50525-2-11:2011](#)) if they are rewirable, or with 1 000 mm \pm 50 mm of the flexible cable supplied if non-rewirable.

Adaptors with fuses conforming to [BS 1362:1973+A3:2021](#) shall have the fuse replaced with a calibrated link constructed and calibrated in accordance with [Annex H](#).

Adaptors with fuses conforming to BS 646:1958+A2:2013 shall be fitted with a BS 646:1958+A2:2013 fuse link of 5 A rating.

Shaver adaptors shall be fitted with a BS 646:1958+A2:2013 fuse link of 1 A rating.

During the tests, temperature rises are measured at the terminals or terminations (if any) and where overheating might result in a hazard.

17.1.2 Tests shall be carried out as follows.

- a) For adaptors where all the adaptor socket-outlets are for [BS 1363](#) plugs, a series of tests shall be conducted by inserting the standard test plug into each socket-outlet in turn and, in each test, a current of 14 A \pm 0.4 A shall be passed through the assembly.
- b) For other adaptors:
 - 1) where there is one adaptor socket-outlet for [BS 1363](#) plugs plus other types and ratings to other standards; or
 - 2) where all adaptor socket-outlets are for plugs of types and ratings to other standards; or
 - 3) in adaptor plugs where there is one adaptor socket-outlet for [BS 1363](#) plugs plus an outlet for a flexible cable;

a series of tests shall be conducted by inserting an appropriate test plug into each socket-outlet in turn, or by applying a load via the flexible cable of an adaptor plug. In each test a current as specified below shall be passed through the assembly.

- i) For socket-outlets rated at 13 A or higher, the test current shall be 14 A \pm 0.4 A.
- ii) For other socket-outlets and for flexible cables, the test current shall be equal to 110% of the respective rating but in no case shall an individual test current exceed 14 A.
- iii) For multiway adaptors, an additional test shall be conducted by inserting an appropriate test plug into each socket-outlet, and in the case of an adaptor plug, by connecting a load via the flexible cable. An electrical load equal to 110% of the total connectable load but not exceeding a maximum value of 14 A shall then be passed through the complete assembly dividing this current between all the socket-outlets, including the flexible cable, if any, in proportion to their respective current ratings.
- iv) For shaver adaptors, the test current shall be 1 A \pm 0.1 A.

Where fitted with USB battery charging outlets these shall be loaded with their rated currents ($+10\%$ -0%) for the duration of the tests.

In the case of adaptors having more than one USB outlet, the test load for the USB outlets shall be applied to a single USB outlet in turn for each test.

For adaptors with multiple USB outlets it might be necessary to repeat the test multiple times with the loading on different outlets to cover the different possible loading options and combinations. For the purpose of this test a suitable load shall be used to provide the desired load current.

The tests shall be carried out at a rated voltage $+10_{-20}^{\circ}\%$.

Adaptors rated 50 Hz and 60 Hz are tested at either frequency unless they contain electronic components which can influence the temperature rise, in which case the most unfavourable rated frequency shall be used.


For these tests, where conductors are connected to terminals, the terminal screws shall be tightened with a torque equal to two thirds of the values given in [Table 6](#).

During the tests, temperature rises are measured and the values shall not exceed those given in [Table 8](#).

Table 8 — Permitted temperature rises

| Measurement point | Temperature rise |
|--|------------------|
| | K |
| Line pin spacer [see Figure 17b] | 37 |
| Neutral pin spacer [see Figure 17b] | 37 |
| Terminals or termination of intermediate adaptors or adaptor plugs | 52 |
| Accessible external surface | 52 |
| <i>NOTE The recording of a measured value up to and including the specified maximum permissible limit for temperature rise is considered to conform to the requirements of the standard on condition that the uncertainty of measurement at not less than 95% confidence level does not exceed $\pm 2^{\circ}\text{C}$.</i> | |

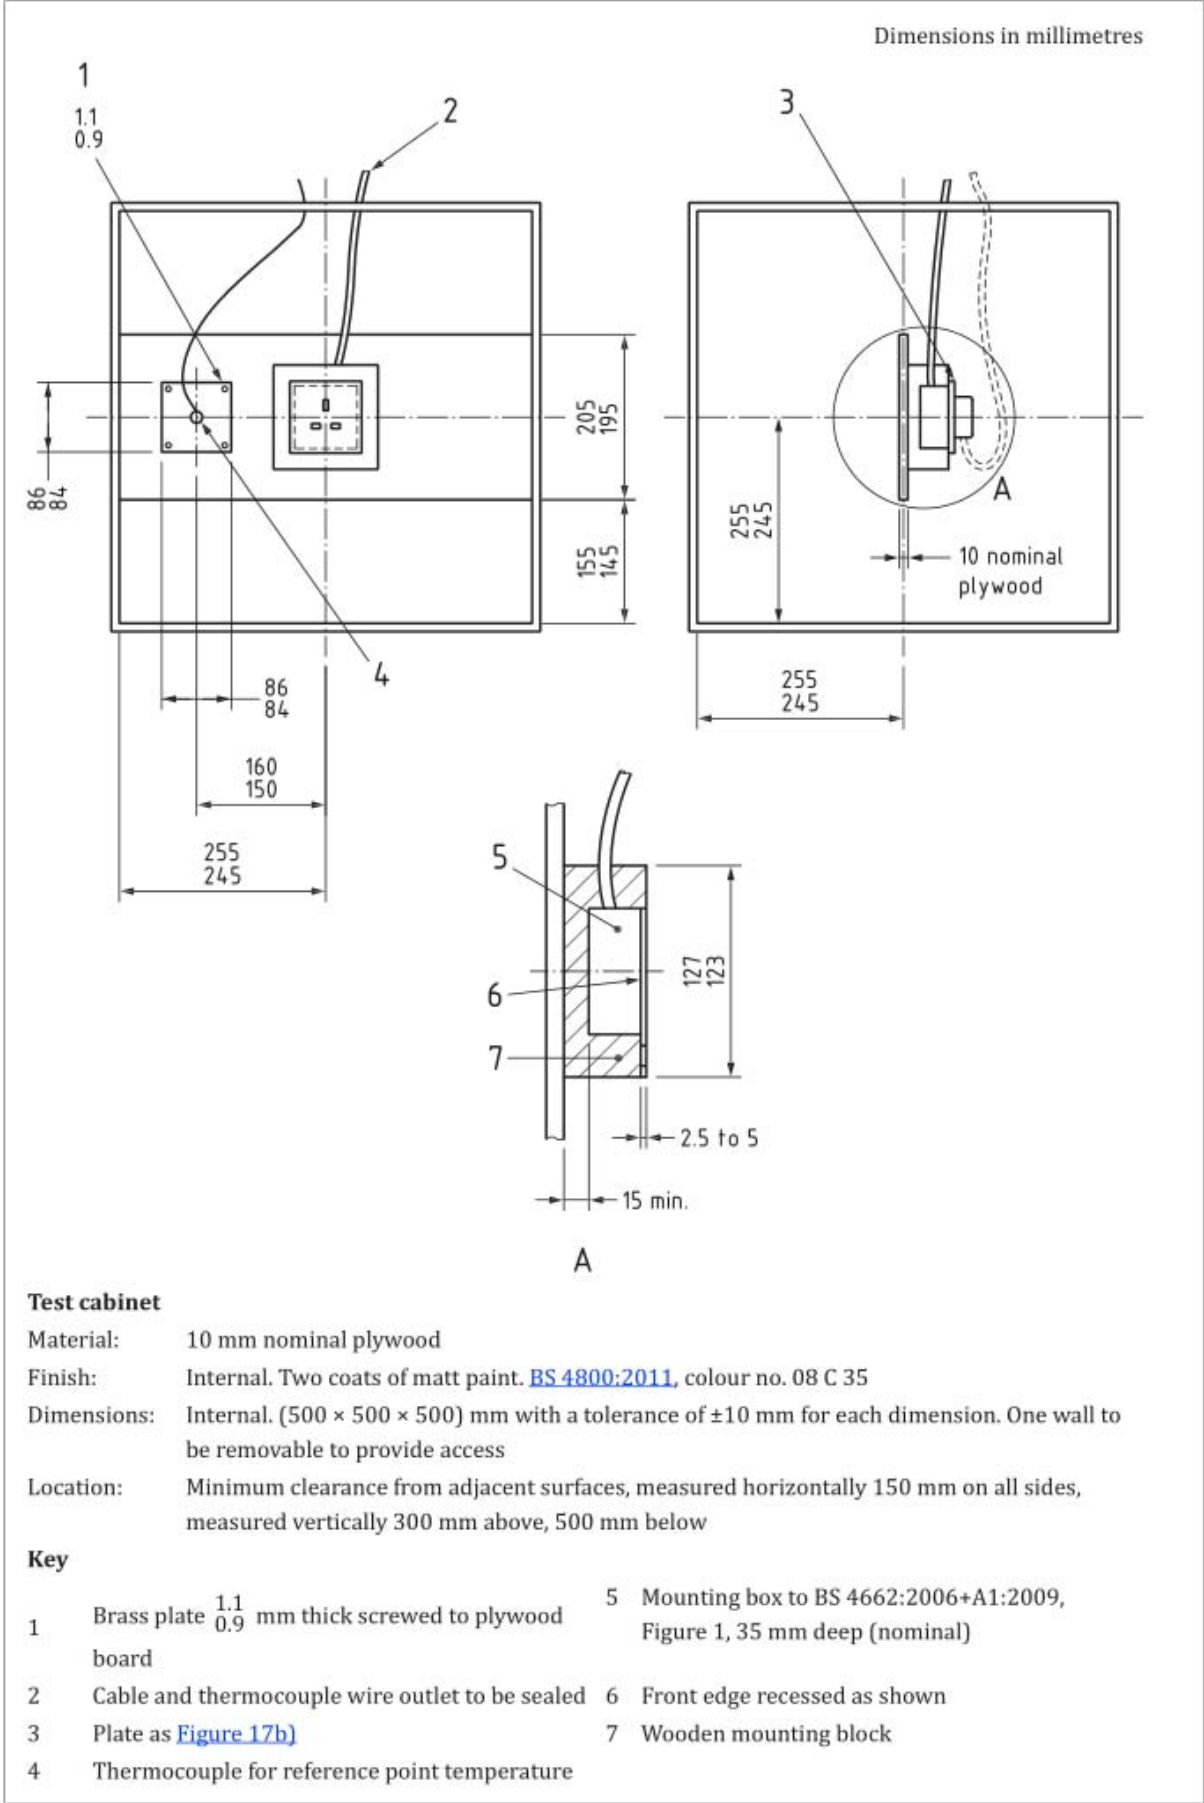Figure 17a) — Test apparatus for temperature rise test



The temperature rises of the line and neutral pins of the adaptor shall be measured by means of thermocouples using the apparatus shown in [Figure 17a](#)). Temperature rises shall be determined by means of fine wire thermocouples so chosen and positioned that they have minimum effect on the temperature of the part under test. The thermocouples shall be attached by means of a mixture of equal parts of resin adhesive and zinc oxide, by soldering, or by other equally effective means.

If soldering is used, the heat from the soldering process shall not affect the performance of the adaptor and no electrical connections shall be bridged by solder.

If, in order to fix thermocouples, a non-rewirable adaptor is dissected to give access to the appropriate positions, the removed parts shall be replaced and if necessary shall be cemented in place so that no additional air spaces are created.

The adaptor shall be mounted in a flat insulating plate as shown in [Figure 17a](#)). The supply conductors shall be attached to the line and neutral pins of the adaptor by means of clamps which also serve to retain the adaptor in position. The clamp screws shall be tightened to a torque of between 0.8 Nm and 1.2 Nm. The assembly shall be mounted by means of screws in a standard steel flush mounted socket-outlet box as shown in BS 4662:2006+A1:2009, Figure 1b), having a nominal internal depth of 35 mm which is mounted in a test cabinet as shown in [Figure 17a](#)). The incoming cable and outgoing flexible cable(s) shall enter the test cabinet through holes in the top surface which shall then be sealed to prevent circulation of air. The length of cable and flexible cable within the [Figure 17a](#)) enclosure shall be a maximum length of 600 mm and 850 mm, respectively. The cable and flexible cable shall be positioned away from the reference temperature measuring point so as not to influence the derivation of plug temperature rise values.

The incoming cable shall be 2.5 mm² PVC insulated and sheathed cable, as given in [BS 6004:2012+A1:2020](#), Table 4, and shall enter the socket-outlet mounting box through the standard knock out provided. This shall be fitted with a suitable rubber grommet, the point of entry being sealed to prevent the circulation of air. The length of cable within the socket-outlet box shall be 150 mm \pm 5 mm and the outer sheath and the circuit protective conductor shall be removed to within 20 mm of the point of entry. The test cabinet [see [Figure 17a](#))] shall be placed in an environment having an ambient temperature of 20 °C \pm 5 °C. The test current shall be passed through the adaptor and through a load(s) connected to the flexible cable of the test plug(s) for a minimum continuous period of 4 h or longer until stability is reached with a maximum duration of 8 h, stability being taken as less than 1 K rise within 1 h.

The temperature rise shall be calculated by deducting the reference point temperature from the measurement point temperature recorded [see [Figure 17a](#)) and [Figure 17b](#)) respectively].

Figure 17b) — *Dummy front plate for temperature rise test*

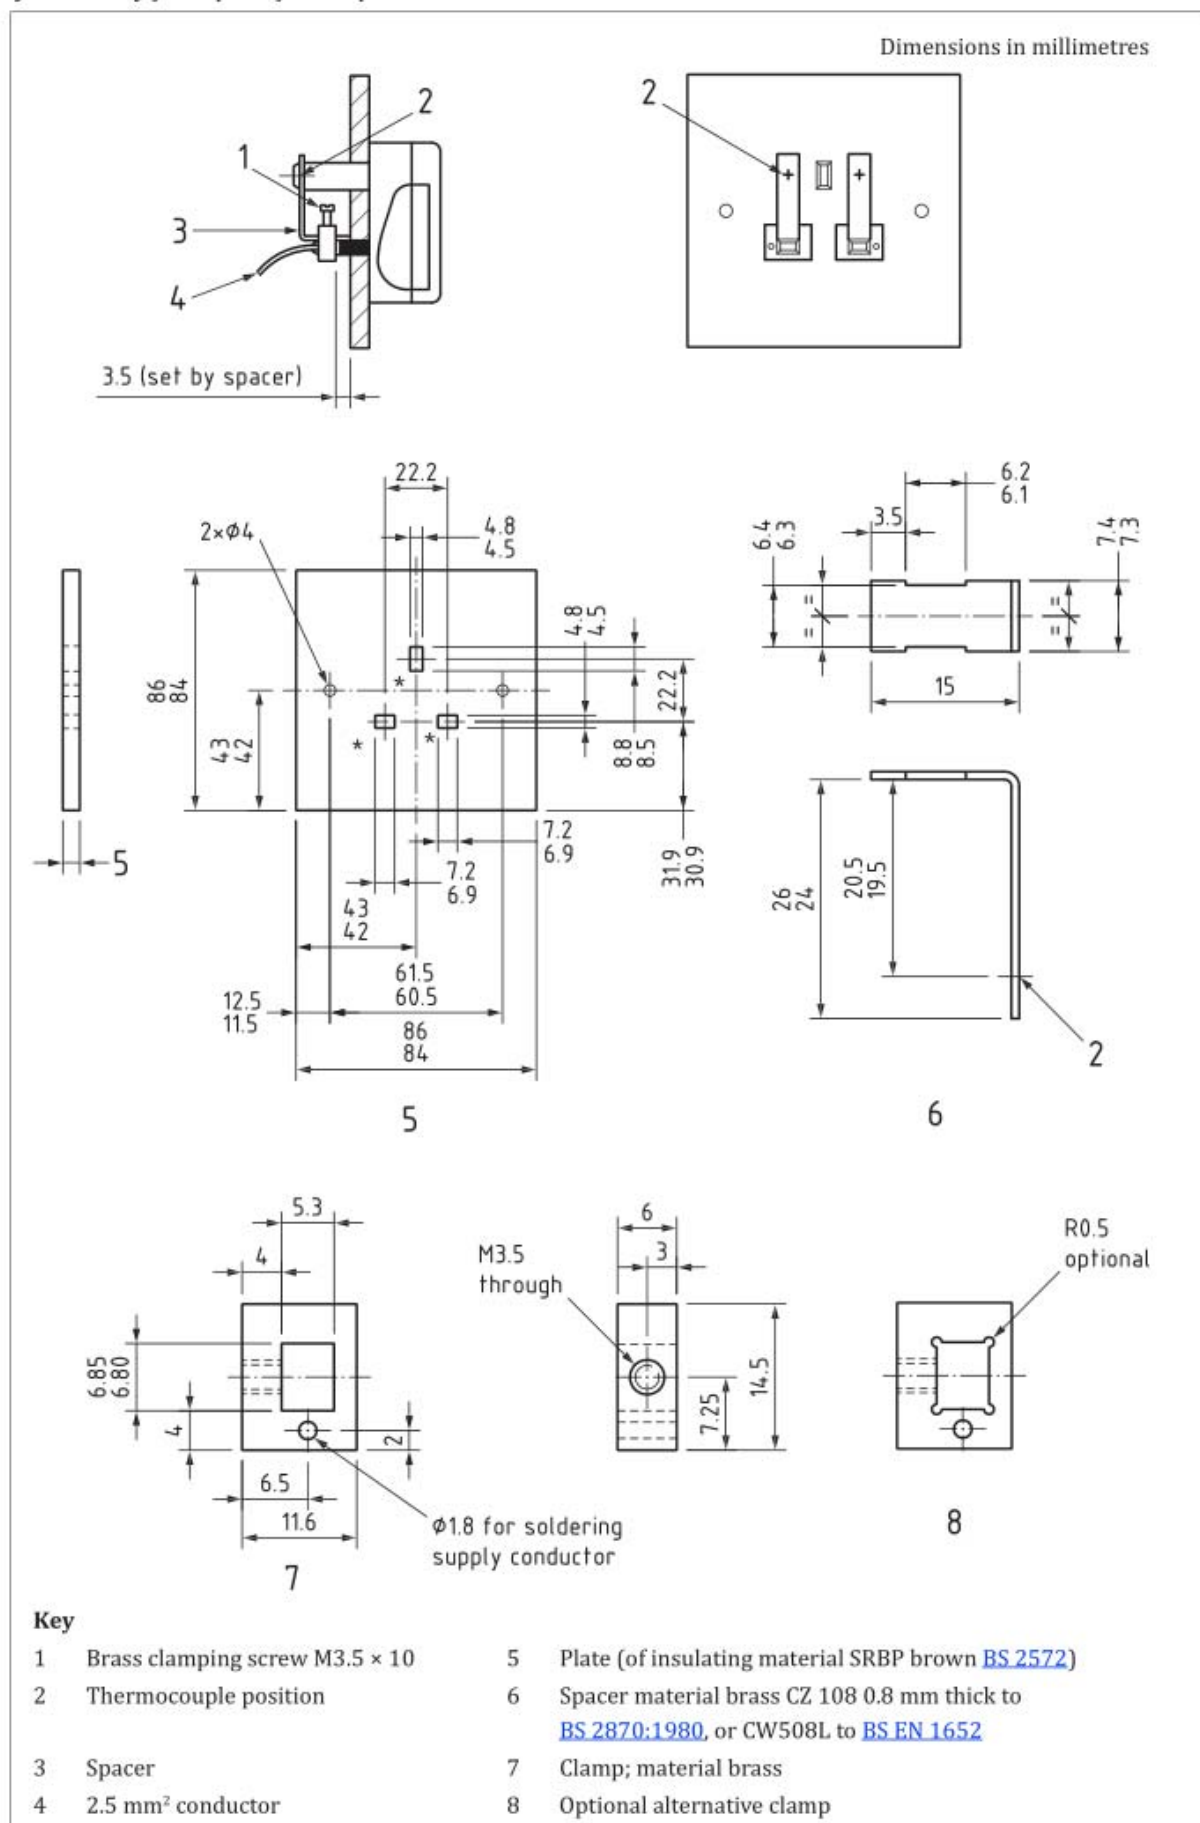


Figure 17b) — Dummy front plate for temperature rise test (continued)

NOTE Tolerance ± 0.2 mm except where otherwise shown.

* The positional tolerance of the three pin apertures shall be proved by the use of gauges in accordance with [Figure 1](#).

18 Breaking capacity of adaptors

18.1 The breaking capacity of socket contacts and switches incorporated in adaptors shall be adequate.

18.1.1 Except for shaver adaptors, conformity shall be checked by the tests described in [18.1.2](#) and [18.1.3](#) as applicable, which shall be completed with the adaptors connected and mounted as in normal use.

NOTE Shaver adaptors are deemed to conform without testing.

18.1.2 The socket contacts shall make and break a current of 1.25 times rated current ± 0.4 A, i.e. (1.25×13) A ± 0.4 A in a substantially non-inductive a.c. circuit at 250 V ± 5 V, 10 times in succession at intervals of approximately 30 s, a plug being withdrawn from the socket-outlet at a speed of approximately 150 mm/s immediately after insertion. For the purpose of the test the fuse link shall be replaced by a link of negligible impedance.

After the test, the adaptor shall be capable of satisfying the subsequent tests detailed in [Table 1](#) for the appropriate test sample.

18.1.3 The switch shall make and break a current of 1.25 times rated current ± 0.4 A in a substantially non-inductive a.c. circuit of 275 V ± 5 V, 10 times in succession at intervals of approximately 30 s. After the test, the adaptor shall be capable of passing the subsequent tests specified in [Table 1](#) for the appropriate test sample.

19 Normal operation of adaptors

19.1 Adaptors shall withstand without excessive wear or other harmful effects, the electrical and mechanical stresses occurring in use.

19.1.1 For adaptors other than shaver adaptors, conformity shall be checked by the tests described in [19.1.2](#) and [19.1.4](#) and for shaver adaptors by the tests described in [19.1.3](#).

19.1.2 Using an appropriate plug with solid pins, each socket-outlet of the adaptor shall make and break a current equal to the rated current ± 0.4 A of the adaptor, or if the rated current ± 0.4 A of the plug is lower, the rated current of the appropriate plug at 250 V ± 10 V a.c. 15 000 times (30 000 movements) in a substantially non inductive circuit.

Each plug shall be inserted into and withdrawn from the socket-outlet under a test at a rate of approximately six insertions and withdrawals per minute, the speed of travel of the plug being approximately 150 mm/s.

The periods during which the plug is inserted and withdrawn shall be approximately equal. Each socket-outlet on the adaptor shall be tested in turn, the plug pins shall be renewed after each 5 000 insertions and withdrawals. For the purposes of this test, no lubrication shall be applied to the plug or socket-outlet under test.

After the test the shutter shall be operating satisfactorily, the socket contacts safely shielded and the adaptor shall be in accordance with [14.7](#), [10.1](#), [17](#), [16](#), [14.5](#), [14.6](#) and [11.2](#). The permitted value of voltage drop specified in [14.5.2](#) is increased to not greater than 40 mV.

19.1.3 Shaver adaptors shall be tested without making and breaking a current, i.e. purely mechanical test.

For the test, three shaver adaptors shall be used, each being tested with one type of plug only. The three plugs shall be:

- a) UK type, conforming to BS 4573:1970+A5:2016;
- b) USA type, as referred to in IEC TR 60083:2015, sheet US1, NEMA 1-15;
- c) European type, conforming to [BS EN 50075:1991](#).

After the test the shutter shall be operating satisfactorily, the socket contacts shall be safely shielded and the adaptor shall be in accordance with [14.7](#), [10.1](#), [17](#), [16](#), [14.5.2](#), [14.6](#) and [11.2](#). The permitted value of voltage drop specified in [14.5.2](#) is increased to not greater than 40 mV.

19.1.4 In switched adaptors the voltage drop across each switched pole, measured at points immediately adjacent to the switch, shall not exceed 60 mV at rated current.

The switch shall then make and break its rated current ± 0.4 A at 250 V ± 10 V 15 000 times (30 000 movements) in a substantially non inductive a.c. circuit at a rate of approximately six complete cycles per minute at regular intervals. The periods during which the switch is "on" and "off" shall be approximately equal. The means used for operating the switch shall be such as to move the actuating member at a speed of approximately 300 mm/s both in making and breaking the circuit and shall be so positioned that the normal action of the mechanism is not interfered with in any way.

At the end of the test, the switch shall be capable of making and breaking its rated current ± 0.4 A at 250 V ± 10 V and the voltage drop across each switched pole, measured as above, shall not exceed 75 mV.

The switch shall also pass the tests given in [Clause 16](#), the test voltages given in [16.1.3](#) being reduced by 25%.

20 Connection of flexible cables and cable anchorage in intermediate adaptors and adaptor plugs

20.1 Provision shall be made for the entry and effective clamping without bending of 2-core and 3-core flexible cables for rewirable adaptors as given in [BS EN 50525-2-11:2011](#), [BS EN 50525-2-21:2011](#), [BS EN 50525-2-22:2011](#) and [BS EN 50525-2-71:2011](#), having nominal conductor cross sectional areas not exceeding 1.5 mm².

For non-rewirable adaptors provision shall be made for the entry and adequate retention of the flexible cable with which the plug is supplied, once assembled it shall not be possible to affect the integrity of the cable anchorage.

The entry for the flexible cable shall be between the current carrying pins at the side of the adaptor, opposite the earth pin.

The cable anchorage shall be such that the conductors are relieved from strain, including twisting, where they are connected to the terminals or terminations.

The cable anchorage shall contain the sheath. Cable anchorages shall either be of insulating material or, if of metal, shall be provided with an insulating lining fixed to the metal parts.

Methods such as tying the flexible cable into a knot or tying the ends with string, etc. shall not be used.

20.1.1 Conformity shall be checked by inspection and by the following tests.

- a) Rewirable adaptors shall be fitted with the smallest cable appropriate to the rating as given in Table 2. The conductors shall be introduced into the terminals and the terminal screws tightened to one third of the appropriate torque values listed in Table 6. The cable anchorage shall be used in the normal way, the clamping screws, if any, being tightened to a torque of two thirds of that given in Table 6. The assembly shall then be left untouched for a minimum of 24 h.

After this preparation, it shall not be possible to push the flexible cable into the adaptor to such an extent as to impair safety or so that the cable anchorage is loosened. The flexible cable shall then be subjected 25 times to the pull given in Table 2. The pulls shall be applied in one smooth and continuous motion in the most unfavourable position momentarily. Immediately afterwards, the flexible cable shall be subjected for 60^{+5}_0 s to the appropriate torque shown in Table 2, at a minimum starting distance of 150 mm from the cable entry measured along the length of the cable.

NOTE It is not intended that the dimension of 150 mm is maintained during the application of the test torque.

The tests shall then be repeated but with the rewirable adaptor fitted with a 3-core flexible cable having a nominal conductor cross sectional area of 1.5 mm² as given in BS EN 50525-2-11:2011.

- b) For non-rewirable adaptors, the test shall be carried out with the cable with which the adaptor is supplied and using the load and torque given in Table 2. The conductors of the flexible cable shall be severed at the point of termination prior to the test.

A voltage of 3 750 V \pm 75 V shall be applied for 60^{+5}_0 s between the conductors.

During this test the insulation of the flexible cable shall not be damaged, i.e. no breakdown or flashover shall occur.

- c) After the tests given in a) and b) the flexible cable shall not have been displaced by more than 2 mm.

For the measurement of longitudinal displacement, a mark shall be made on the cable whilst it is subjected to the load given in Table 2, at a point adjacent to the anchorage in the case of rewirable adaptors, or as close as practicable to the cable anchorage in the case of non-rewirable adaptors, before starting the tests. After the test, the displacement of the mark on the flexible cable in relation to the cable anchorage shall be measured whilst the cable is again subjected to the load given in Table 2.

20.2 Cable anchorage in rewirable adaptors shall anchor the cable securely to the adaptor. The design shall ensure the following:

- a) the cable anchorage cannot be released from the outside without the use of a tool;
- b) it shall not be possible to touch cable anchorage screws, if any, with test probe B of BS EN 61032:1998 when the adaptor is energized;
- c) the cable is not clamped by a metal part bearing directly on the flexible cable;
- d) at least one part of the anchorage is securely fixed to the adaptor;
- e) clamping the cable does not require the use of a special purpose tool;
- f) tightening the cable anchorage screws if any to the torque specified in Table 6 does not distort the engagement surface of the adaptor to such an extent that conformity with 13.2 is affected; and
- g) the adaptor is able to be correctly assembled without damage when it is wired with the largest specified flexible cable and all screws are tightened to the torque specified in Table 6.

20.2.1 Conformity shall be checked by inspection and test.

20.3 Screws which are used when clamping the flexible cable shall not serve to fix any other components unless the adaptor is rendered manifestly incomplete if the component is omitted or is replaced in an incorrect position, or the component intended to be fixed cannot be removed without further use of a tool.

20.3.1 Conformity shall be checked by inspection.

20.4 Non-rewirable adaptors shall be fitted with flexible cables conforming to the relevant parts of [BS EN 50525](#) or with flexible cables conforming to the requirements of the specification appropriate to the equipment to which they might be fitted. Connections shall be as given in [Table 9](#).

20.4.1 Conformity shall be checked by inspection and a continuity test.

20.5 Non-rewirable adaptors shall be so designed that the flexible cable is not subjected to excessive bending where it enters the adaptor.

20.5.1 Conformity shall be checked by the following test using an apparatus similar to that shown in [Figure 18](#). The adaptor shall be fixed to the oscillating member of the apparatus so that when this is vertical the axis of the flexible cable at the point of entry is vertical and passes through the axis of oscillation.

Adaptors with flat flexible cables shall be mounted so that the major axis of the section is parallel to the axis of oscillation. The flexible cable shall be loaded with a weight such that the force is as given in [Table 2](#).


The distance between the point of entry to the adaptor and the axis of oscillation shall be adjusted so that the weight makes the minimum lateral movement as the oscillating member moves. A current appropriate to the flexible cable fitted, as given in [Table 2](#), shall be passed through the line and neutral conductors, the voltage between them being $250\text{ V} \pm 10\text{ V}$ a.c. If an earthing conductor is incorporated in the flexible cable it shall be connected at one end to the neutral conductor. The oscillating member shall be moved through an angle of $45^\circ \pm 3^\circ$ on either side of the vertical, the number of flexings being 10 000 at a rate of 60 ± 10 flexings per minute.

After 5 000 flexings, adaptors with cables of circular section are turned through $90^\circ \pm 5^\circ$ about the cable entry centreline.

One flexing shall be one movement through 90° .

During the test there shall be no interruptions of the current passing through the conductors and no short-circuit between them.

After the test the adaptors shall show no damage except that breakage of not more than 10% of the total number of conductor strands in any core is ignored, provided they have not pierced the insulation.

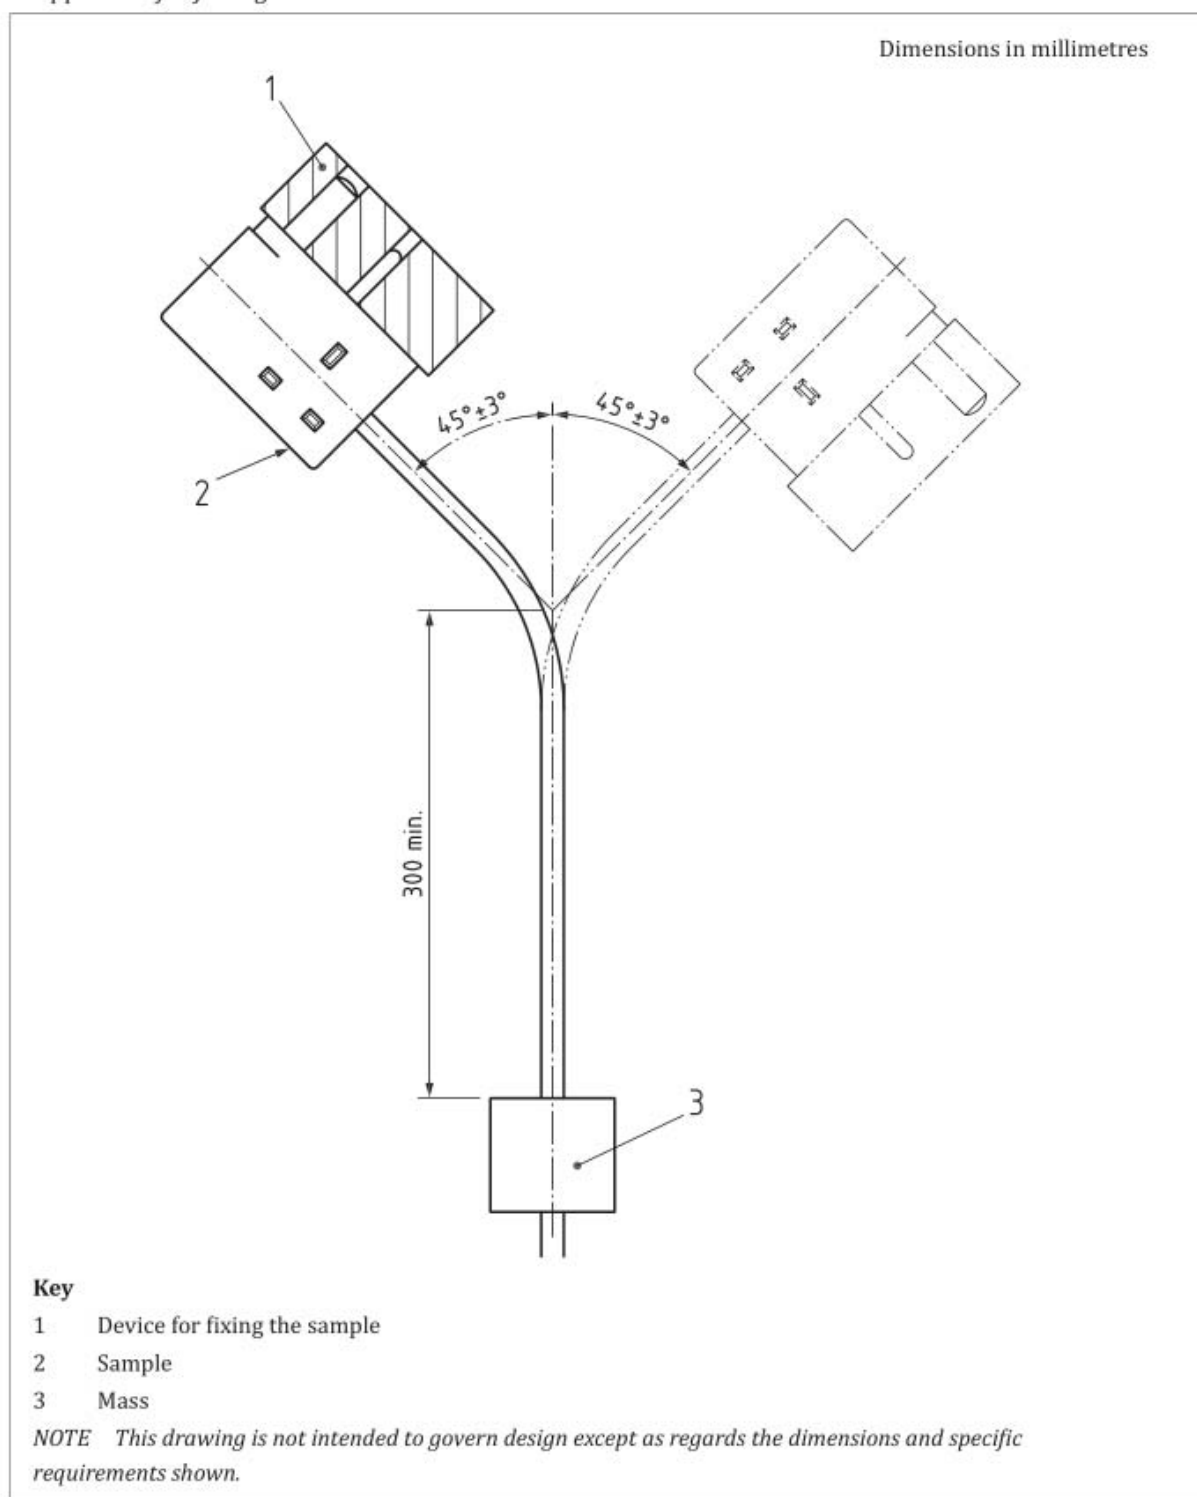Figure 18 — Apparatus for flexing test

20.6 The cable entry to rewirable adaptors shall be so shaped as to prevent damage to the cable.

20.6.1 Conformity shall be checked by inspection.

Table 9 — Connection of flexible cables

| Termination | Conductor insulation colour | | | Termination | Colour |
|-------------|---------------------------------------|---------------------------------------|---------------------------------------|-------------|------------------|
| | BS EN 50525-2-11:2011 | BS EN 50525-2-21:2011 | BS EN 50525-2-22:2011 | | |
| | 3-core | 2-core | 2-core | | |
| Earth | Green and yellow | No connection | No connection | Earth | Green and yellow |
| Line | Brown | Brown | As supplied | L in/L1 | Brown |
| Neutral | Blue | Blue | As supplied | L out/L2 | Black |
| | | | | Neutral | Blue |

21 Mechanical strength


21.1 Adaptors shall have adequate mechanical strength and be so constructed as to withstand such handling as expected in normal use.

21.1.1 Conformity shall be checked for the following:


- a) adaptors fitted with [BS 1362:1973+A3:2021](#) fuse links by the tests of [21.1.2](#);
- b) adaptors fitted with BS 646:1958+A2:2013 fuse links by the tests of [21.1.3](#);
- c) following which, all adaptors are subjected to the tests given in [21.1.4](#) and [21.1.5](#) using separate samples for each of these tests.

21.1.2 For fused adaptors using fuse links conforming to [BS 1362:1973+A3:2021](#), a solid link of stainless steel as shown in [Figure 19](#) shall be inserted and withdrawn from the fuse clips of a fused adaptor 20 times in succession in a normal manner, at a rate not exceeding 10 per minute. A standard fuse link conforming to [BS 1362:1973+A3:2021](#) shall then be fitted with the appropriate mechanical strength test completed.

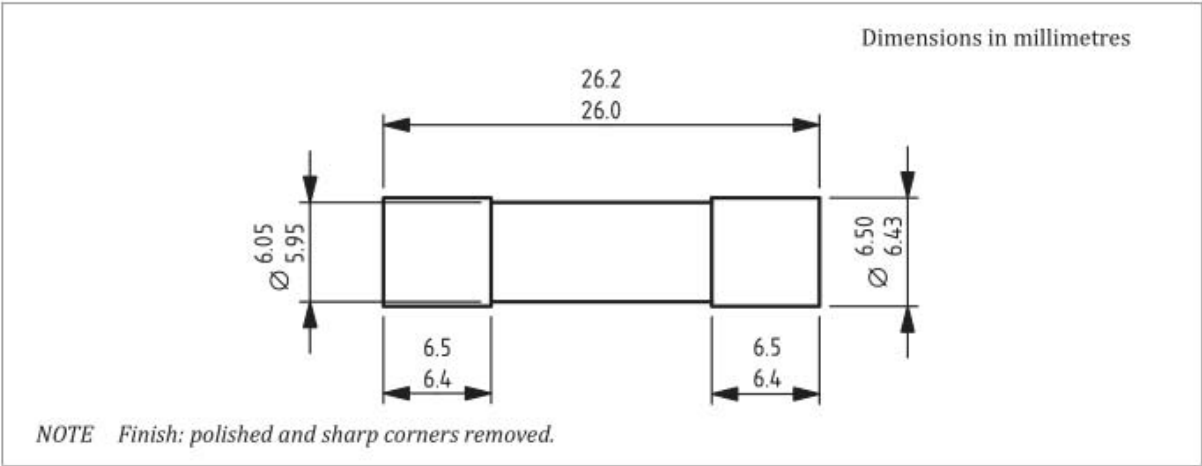Figure 19 — Solid link for test on fuse clips



21.1.3 For fused adaptors using fuse links conforming to BS 646:1958+A2:2013, a solid link of stainless steel as shown in [Figure 38](#) shall be inserted and withdrawn from the fuse clips of the fused adaptor 20 times in succession in a normal manner, at a rate not exceeding 10 per minute. A standard fuse link conforming to BS 646:1958+A2:2013 shall then be fitted and the appropriate mechanical strength test completed.

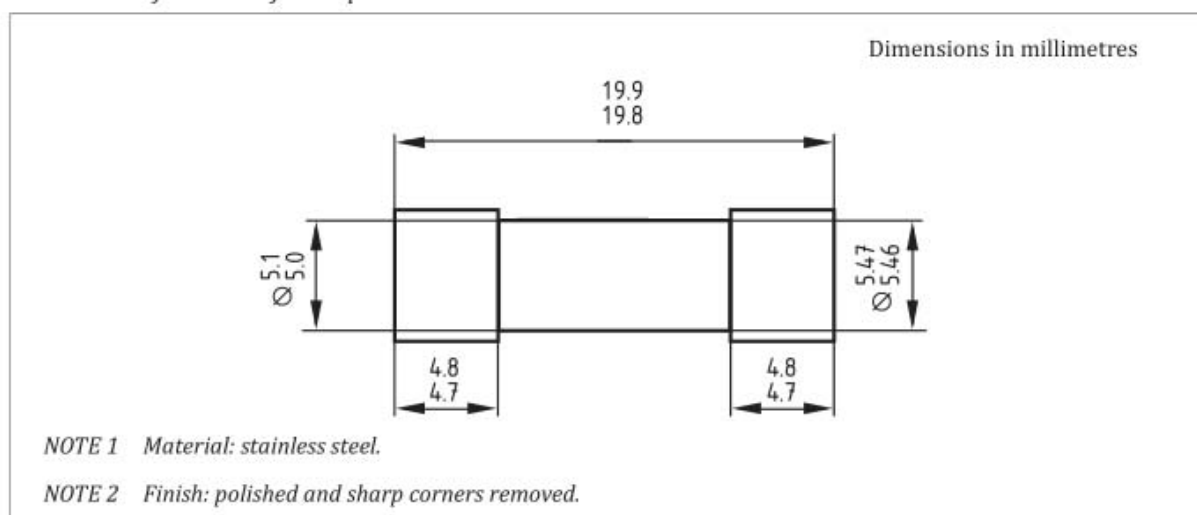Figure 38 — Solid links for test on fuse clips

- 21.1.4** Adaptors shall be tested with the impact test apparatus shown in [Figure 21a](#)) when mounted in a socket-outlet. The pendulum shall consist of a steel tube with an external diameter of 9 mm and a wall thickness of 0.5 mm, suspended in such a way that it swings only in a vertical plane. A hammer shall be rigidly fixed to the lower end.

The striking element shall have a hemispherical face made of polyamide having a Rockwell hardness of $85 \leq \text{HRR} \leq 100$, or hornbeam, and a radius of $10 \text{ mm} \pm 0.5 \text{ mm}$ [see [Figure 21b](#))]. The design of the apparatus shall be such that a force of between 1.9 N and 2 N has to be applied to the face of the hammer to maintain the pendulum in a horizontal position.

A flush socket-outlet conforming to [BS 1363](#) shall be mounted with its associated box, which is placed in a block of hardwood which is itself fixed to a sheet of plywood. The wood used shall have the direction of the wood fibres perpendicular to the direction of impact.

To simulate the condition of normal use, the rear of the plate shall be flush with the surface of the block. The front edge of the box shall be between 2.5 mm and 5 mm behind the face of the block.

The mounting support [see [Figure 21c](#))], having a mass of $10 \text{ kg} \pm 1 \text{ kg}$ shall be mounted on a rigid bracket by means of pivots. The bracket shall be mounted on a frame which is fixed to a solid wall.

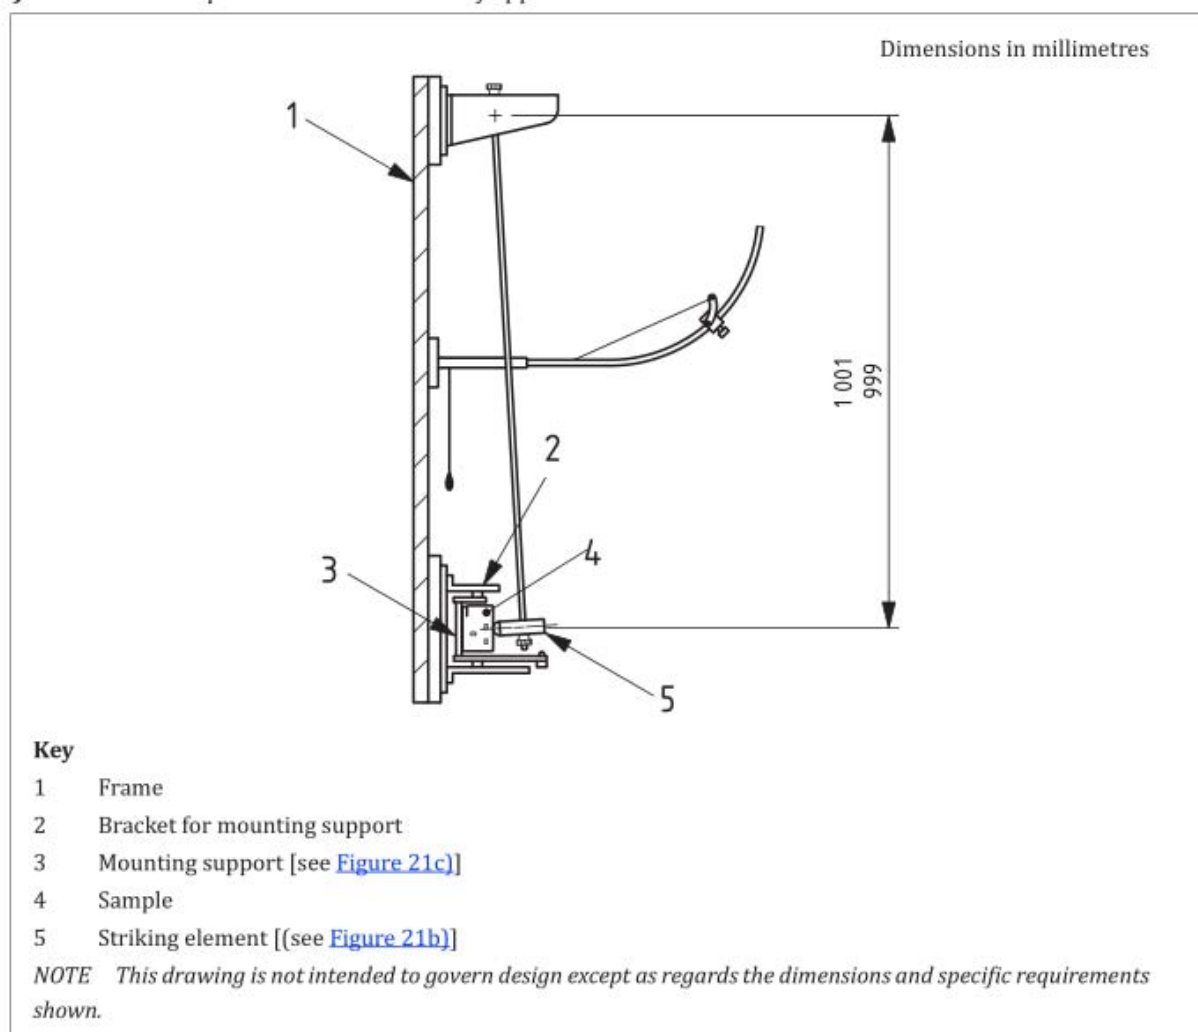
Figure 21a) — Pendulum impact test: General view of apparatus

Figure 21b) — Pendulum impact test: Constructional details of striking elements

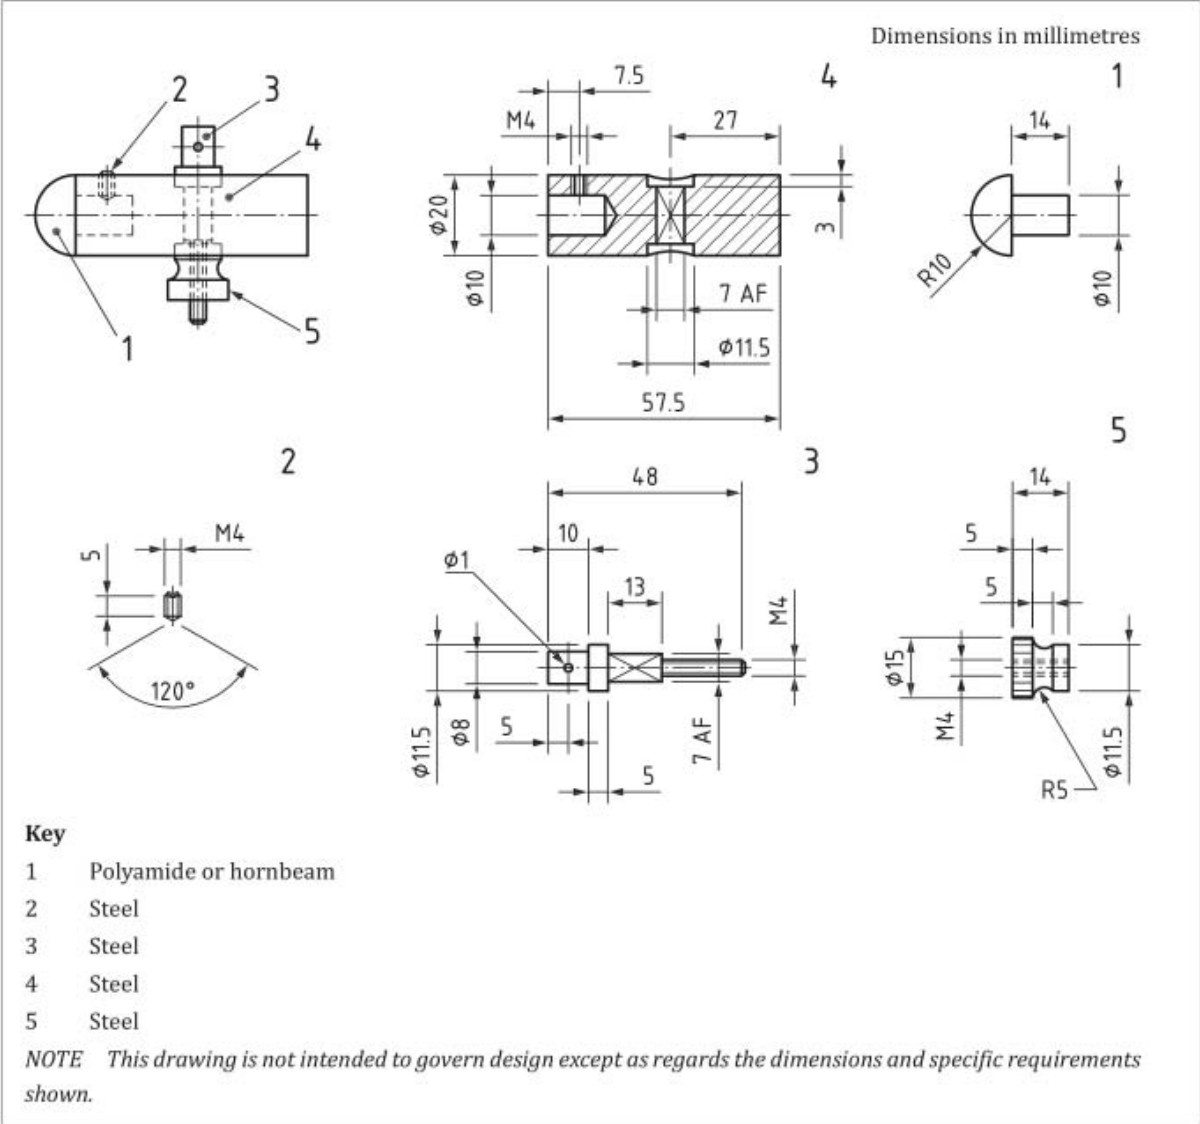
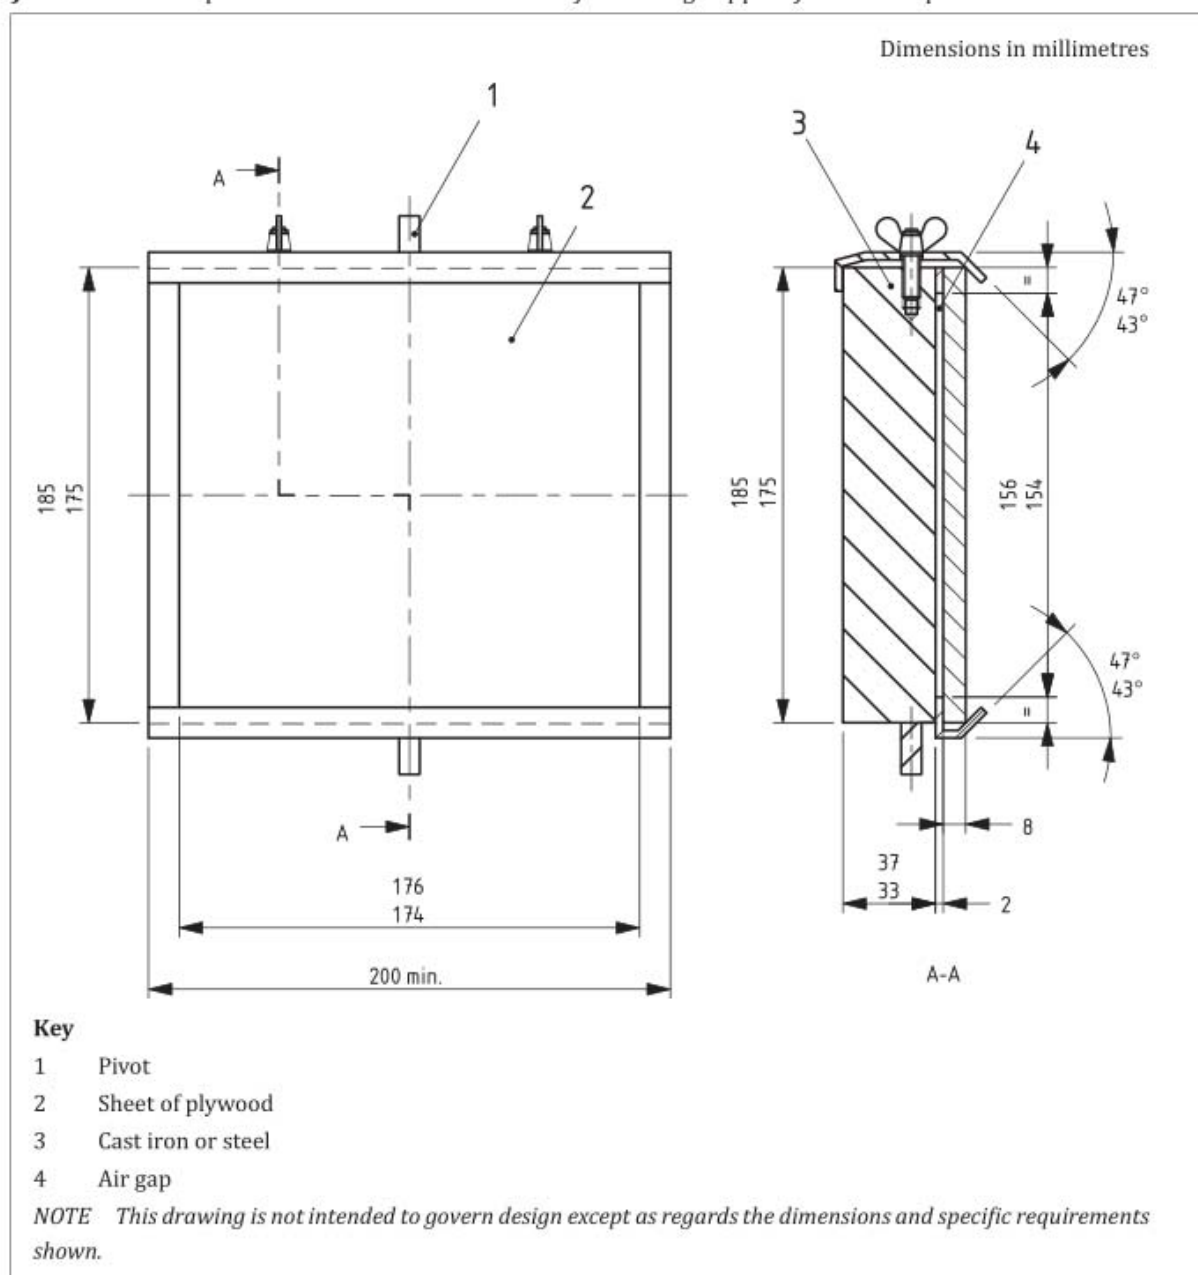


Figure 21c) — Pendulum impact test: Constructional details of mounting support for test samples

The design of the mounting assembly shall be such that:

- a) the sample can be so placed that the point of impact lies in the vertical plane through the axis of the pivot of the pendulum;
- b) the sample can be moved horizontally and turned about an axis perpendicular to the surface of the plywood; and
- c) the plywood can be turned about a vertical axis.

The adaptor shall be inserted into the socket-outlet so that the point of impact lies in the vertical plane through the axis of the pivot of the pendulum. For all tests the hammer shall fall from a height of 150_{-5}^0 mm measured vertically between the point of impact on the sample and the face of the hammer at the point of release. 10 blows shall be applied to points evenly distributed over the adaptor, and any lens shall receive one blow of the hammer at a point approximately in its centre.

After the test the adaptor shall still be in accordance with [Clause 9](#), [Clause 10](#) and [Clause 16](#). After the test on a lens, it is acceptable for the lens to be cracked and/or dislodged, but it shall not be possible to touch live parts using the test pin shown in [Figure 1](#) applied with a maximum force of 5 N applied in accordance with [10.1.1](#).

Damage to the finish, small dents which do not reduce creepage distances and clearances below the values specified in [Clause 9](#) and small chips that do not adversely affect the protection against electric shock or moisture shall be ignored.

Cracks not visible with normal or corrected vision without additional magnification, and surface cracks in fibre reinforced mouldings and the like shall be ignored.

- 21.1.5** Adaptors shall be tested in the tumbling barrel shown in [Figure 20](#). The barrel shall be turned at a rate of approximately 5 r/min (approximately 10 drops per minute). Only one adaptor shall be tested at a time. The number of drops shall be 25. Rewirable intermediate adaptors and adaptor plugs shall be fitted with 3-core PVC 1.25 mm² flexible cable as given in [BS EN 50525-2-11:2011](#), the terminals and cover screw being tightened with the torque given in [Table 6](#). The connection of conductors shall be in accordance with the manufacturer's instructions.

Figure 20 — Tumbling barrel

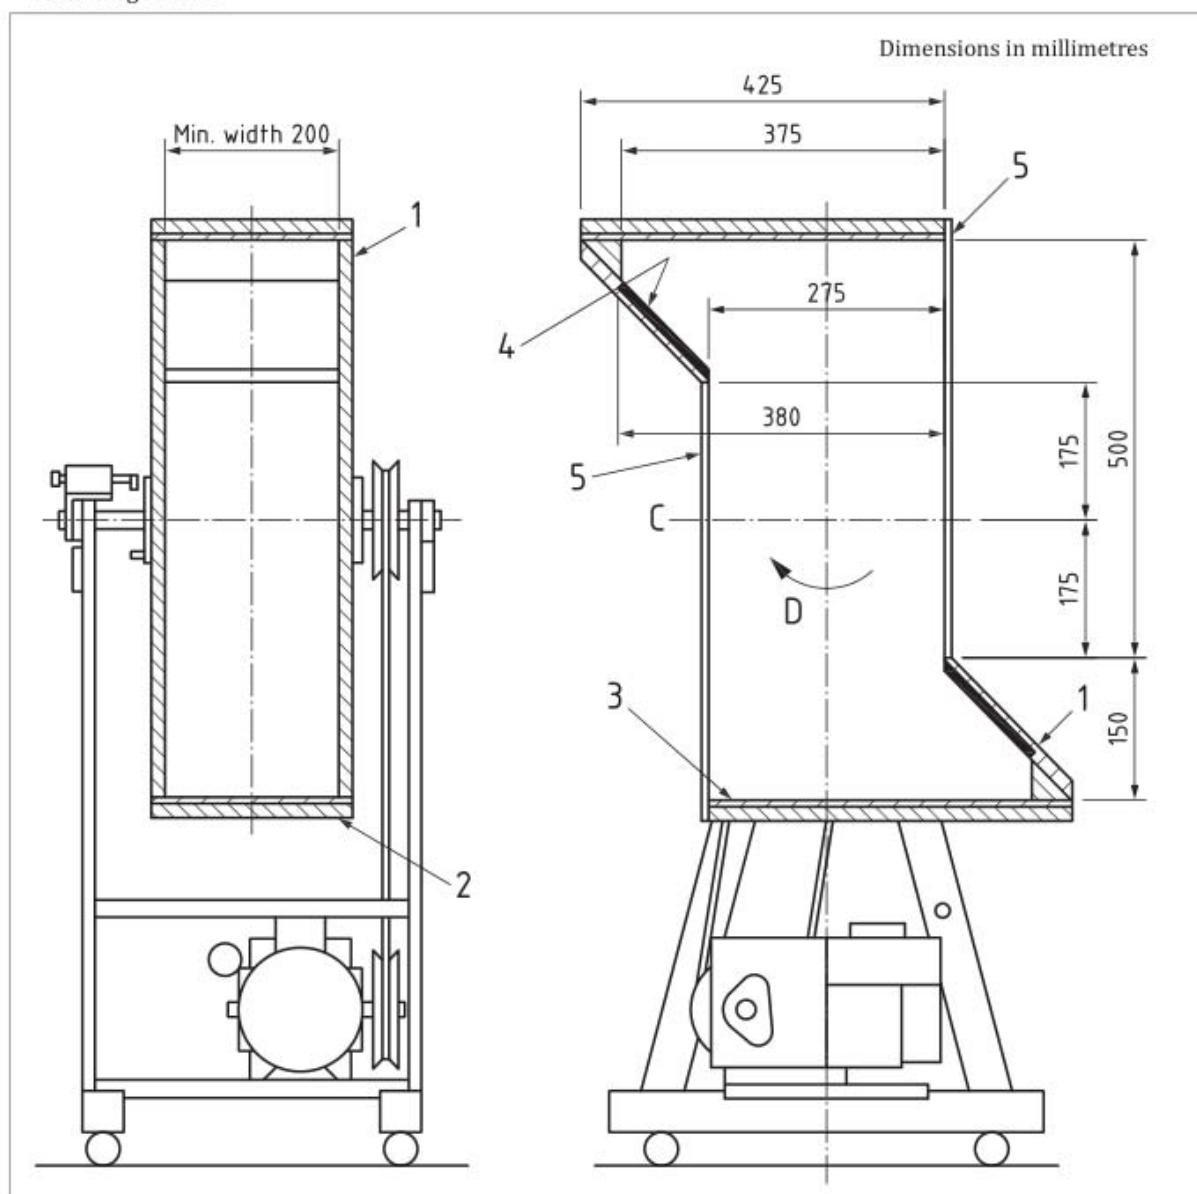


Figure 20 — *Tumbling barrel (continued)***Key**

- C Centre of axis
- D Direction of rotation
- 1 19 mm nominal thick blockboard or suitable alternative
- 2 19 mm nominal thick blockboard might be removable for the replacement of the impact plates
- 3 Impact base 9 mm nominal thick plywood to be replaceable (both ends)^{A)}
- 4 Shelf faced with non-grip material
- 5 Transparent sheet for observation purposes; might be removable for loading

NOTE 1 This drawing is not intended to govern design, except as regards the dimensions and specific requirements shown.

NOTE 2 All dimensions subject to tolerance ± 3.0 except for material thickness

^{A)} 9 mm nominal plywood having an impact face of birch, 1.4 mm nominal thickness and of 5 ply construction.

Non-rewirable intermediate adaptors and adaptor plugs shall be tested as delivered.

The attached flexible cables shall be cut to a length of 150 mm \pm 5 mm measured from the nearest edge of the earthing pin, pre-coiled flexible cables being extended before measurement.

After the test the adaptor shall show no damage which might affect safety, no component parts shall have become detached, and the pins of the adaptor shall not have been unduly distorted, checked using the gauge shown in [Figure 5](#) when used in a manner as described in [13.2.1](#) but with a force not exceeding 20 N.

Screws shall remain tight to a torque not less than 70% of the original tightening torque and current carrying joints shall not have become loose and shall make satisfactory contact.

Damage to the finish, small dents which do not reduce creepage distances and clearances, below the values specified in [Clause 9](#) and small chips that do not adversely affect the protection against electric shock or moisture shall be ignored.

21.1.5.1 Conformity shall be checked by inspection and the temperature rise test of [Clause 17](#).

For the repeat test given in [Clause 17](#), the attached flexible cable (if any) shall be retained without disturbing the terminal connections, but the conductor insulation and sheath shall be removed only as far as is necessary for the attachment of a 1 000 mm \pm 50 mm length of flexible cable of the same type as that already attached to the adaptor, the connection being made by means of a connector having a current rating appropriate to that of the flexible cable.

22 Screws, current carrying parts and connections

22.1 Screwed connections, electrical and otherwise, shall withstand the mechanical stresses occurring in normal use. Screws directly transmitting electrical contact pressure shall screw into metal. Screws shall not be of metal which is soft and liable to creep.

Screws shall not be of insulating material if their replacement by a metal screw would affect the safety or performance requirements of the adaptor.

Contact pressure in electrical connections within the adaptor outlet and between the adaptor outlet and the cable or flexible cable connected to it shall not be transmitted through insulating material other than ceramic, pure mica or other material with characteristics no less suitable, unless there is sufficient resiliency in the metallic parts to compensate for any possible shrinkage or yielding of the insulating material.

- 22.1.1** Conformity shall be checked by inspection and, for screws and nuts which are intended to be tightened during installation or use, or during replacement of the fuse link, by the following test.

The screw shall be tightened and loosened as follows:

- a) 10 times for screws in engagement with a thread of insulating material, the screw being completely removed and replaced each time; or
- b) five times for nuts and other screws.

When testing terminal screws and nuts, a 1.5 mm² flexible conductor shall be placed in the terminal. The conductor shall be moved each time the screw is loosened. The test shall be made by means of a suitable test screwdriver, applying a torque as given in [Table 6](#) in one smooth and continuous motion. The shape of the blade of the test screwdriver shall suit the head of the screw being tested.

During the test no damage impairing the further use of the screwed connection shall occur.

- 22.2** Thread cutting and/or thread forming screws shall not be used for the making of current carrying or earth continuity connections.

Screws which make a mechanical connection between different parts of the adaptor shall be locked against loosening, if the connection carries current.

Rivets used for current-carrying or earth continuity connections shall be locked against loosening, if these connections are subject to torsion in normal use which is likely to loosen the connection.

- 22.2.1** Conformity shall be checked by inspection and by manual test.

NOTE 1 Spring washers and the like may provide satisfactory locking.

NOTE 2 For rivets, a non-circular shank or an appropriate notch may be sufficient.

- 22.3** Current carrying parts, earthing plug pins and earthing contacts shall be of brass (having a minimum content of 58% copper), copper, phosphor bronze or other metal at least equivalent with regard to its conductivity, resistance to abrasion and resistance to corrosion. This requirement does not apply to screws, nuts, washers, clamping plates and similar parts of terminals, nor to parts of adaptors used for earth continuity purposes.

- 22.3.1** Conformity shall be checked by inspection and by the relevant tests described in [11.2](#), [Clause 17](#) and [Clause 25](#).

23 Resistance to heat

- 23.1** Adaptors shall be resistant to heat.

- 23.1.1** Conformity shall be checked by the test given in [23.1.2](#) or [23.1.3](#).

- 23.1.2** Adaptor samples shall be kept for 60^{+5}_0 min in a heating cabinet maintained at 70 °C ±5 °C.

During the test they shall not undergo any change impairing their further use and sealing compound shall not flow to such an extent that live parts are exposed.

A slight displacement of the sealing compound shall be disregarded.

After the test the adaptor shall still satisfy the test described in [10.2.1](#) and [16.1.3](#).

- 23.1.3** Adaptors with external parts of resilient material, e.g. thermoplastics, rubber, shall be subjected to a pressure test by means of an apparatus similar to that shown in [Figure 23](#), the test being made in a heating cabinet at a temperature of 70 °C ±5 °C.

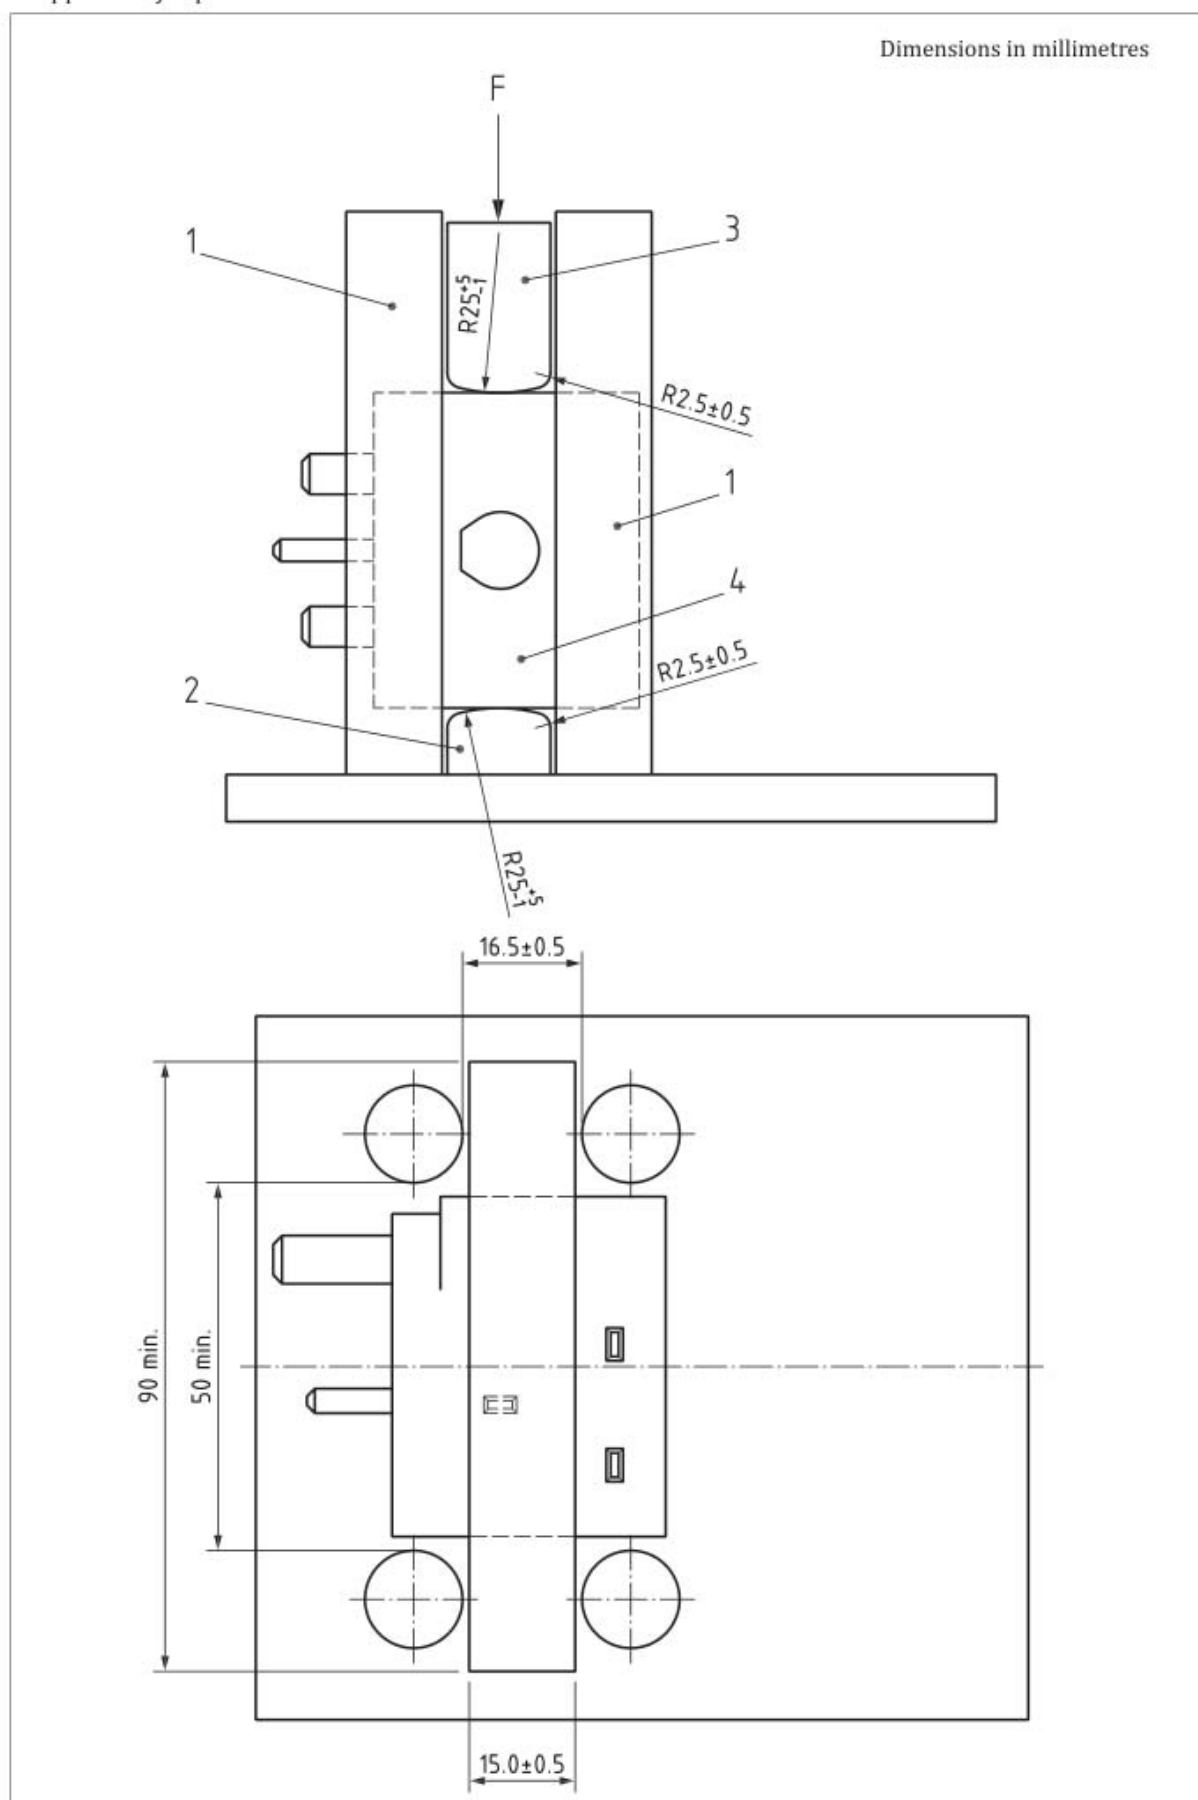
Figure 23 — Apparatus for pressure test

Figure 23 — Apparatus for pressure test (continued)

Key

F Force

1 Guide

2 Fixed jaw

3 Moving jaw

4 Sample

NOTE This drawing is not intended to govern design except as regards the dimensions and specific requirements shown.

The adaptor shall be clamped between the jaws in such a way that these press against it in the area where it is gripped in normal use, the centre line of the jaws coinciding as nearly as possible with the centre of this area.

The force applied, including the effect of the jaws, shall be 20_{-1}^{+0} N.

After 60_{-0}^{+5} min, the jaws shall be removed and the adaptor shall still satisfy the tests described in 16.1.2b)1) and 16.1.3 and shall fit the gauge shown in Figure 2 when used in a manner as described in 13.2.1.

- 23.2 Parts of insulating material shall be sufficiently resistant to heat having particular regard for their location and function in the complete adaptor.
- 23.2.1 Conformity shall be checked as follows:

a) parts of ceramic material are deemed to conform without test;

b) external parts of adaptors tested in accordance with 23.1.3 are deemed to conform without further testing; and

c) all other parts of insulating material, including ISODs if fitted, shall be subjected to the ball pressure test in accordance with BS EN 60695-10-2:2014. The test is made in a heating cabinet maintained at a temperature of 75 °C ±5 °C.

24 Resistance to abnormal heat and fire

24.1 General

Adaptors shall be resistant to abnormal heat and fire.

- 24.1.1 Conformity shall be checked by the test described in 24.2.
- The tests shall not be made on parts of ceramic material or metal.

24.2 Glow wire test

The test shall be performed in accordance with BS EN IEC 60695-2-11:2021 and at the test temperature given in Table 10.

Table 10 — Application of glow wire test

| Part | Temperature of glow-wire °C |
|--|--------------------------------|
| Parts necessary to retain live parts in position, including ISOD | 750 ±10 |
| Parts not necessary to retain live parts in position (although they might be in contact with live parts) | 650 ±10 |

NOTE 1 If the test specified is required to be made at more than one place on the same sample, it is essential that care is taken to ensure that any deterioration caused by previous tests does not affect the result of the test to be made.

Small parts (see 3.31), parts of insignificant mass (see 3.19), parts unlikely to be subjected to abnormal heat and parts whose failure to pass these tests would not materially affect the safety of the adaptor shall be excluded from this glow wire test.

NOTE 2 The glow wire test is performed to ensure that an electrically heated test wire under defined test conditions does not cause ignition of insulating parts or to ensure that a part of insulating material, which might be ignited by the heated test wire under defined conditions, has a limited time to burn without spreading fire by flame or burning parts or droplets falling down from the tested part onto a pinewood board covered with tissue paper.

The test sample shall be either a complete adaptor or, if the test cannot be made on a complete adaptor, a suitable part cut from the sample for the purposes of the test.

The test shall be made on one sample.

In case of doubt, the test shall be repeated on two further samples.

The test is made applying the glow wire once.

The sample shall be positioned during the test in the most unfavourable position of its intended use (with the surface tested in a vertical position).

The tip of the glow wire shall be applied to the specified surface of the sample taking into account the conditions of intended use under which a heated or glowing element might come into contact with the sample.

The sample shall be regarded as having passed the glow wire test if:

- a) there is no visible flame and no sustained glowing; or
- b) the flames and glowing of the sample extinguish within 30 s after the removal of the glow wire.

There shall be no ignition of the tissue paper or scorching of the board.

25 Resistance to excessive residual stresses and to rusting

- 25.1** Press formed or similar current carrying parts of copper alloy containing less than 80% of copper shall be resistant to failure in use due to stress corrosion.

- 25.1.1** Conformity shall be checked by the following test.

The sample shall be degreased in a suitable alkaline degreasing solution or organic solvent, then immersed in an aqueous solution of mercurous nitrate containing 10 g of $\text{Hg}_2(\text{NO}_3)_2$ and 10 ml of HNO_3 (relative density 1.42) per litre of solution for 30 min \pm 1 min at a temperature of 20 °C \pm 5 °C.

WARNING. Attention is drawn to the fact that due precautions should be taken when using and disposing of these liquids as they are toxic.

After the treatment, the sample shall be washed in running water, any excess mercury wiped off, and the sample shall be immediately visually examined.

There shall be no cracks visible with normal or corrected vision without additional magnification.

- 25.2** Ferrous parts, the rusting of which might cause the adaptor to become unsafe, shall be adequately protected against rusting.

- 25.2.1** Conformity shall be checked by the following test.

The sample is degreased in a suitable alkaline degreasing solution or organic solvent, the parts are then immersed for 10 min \pm 0.5 min in a 10% solution of ammonium chloride in water at a temperature of 20 °C \pm 5 °C.

Without drying but after shaking off any drops, the parts are placed for 10 min \pm 0.5 min in a box containing air saturated with moisture at a temperature of 20 °C \pm 5 °C. After the parts have been dried for at least 10 min in a heating cabinet at a temperature of 100 °C \pm 5 °C their surfaces shall show no signs of rust. Traces of rust on sharp edges and any yellowish film removable by rubbing shall be ignored.

For small helical springs and the like, and for parts exposed to abrasion, a layer of grease can provide sufficient protection against rusting. Such parts shall be subjected to the test only if there is doubt about the effectiveness of the grease film and the test shall then be made without previous removal of the grease.

26 (Not used)

27 Overload tests

- 27.1** Adaptors rated at 13 A shall withstand current which could occur due to overload without creating a risk of contact with live parts.

- 27.1.1** Conformity is checked by the tests given in [27.1.2](#) to [27.1.4](#). The test arrangement shall be as described in [17.1](#) except no thermocouples or pin spacers shall be used and the test conducted at any voltage between 12 V and 250 V.

For adaptors with adaptor socket-outlets for BS 1363-1:2023 plugs, a standard plug to BS 1363-1:2023 shall be used instead of the standard test plug for the temperature rise test described in [Annex G](#).

For adaptors with a single socket-outlet section, the total test current shall be passed through that single socket-outlet. For multiway adaptors, the test current shall be divided between the adaptor socket-outlets such that at least one adaptor socket-outlet is loaded with the maximum rated current for the adaptor. The plug which is to be loaded with the rated current shall be fitted with a 13 A fuse to [BS 1362:1973+A3:2021](#). Other BS 1363-1:2023 plugs which are connected to the adaptor shall be fitted with appropriately rated [BS 1362:1973+A3:2021](#) fuse(s). For adaptors with a flexible cable, or with provision for a flexible cable, the total test current shall pass through the connected flexible cable.

NOTE Owing to the high temperatures which can be expected during these tests, laboratories are advised to use separate test cabinets for these tests.

- 27.1.2** Fused adaptors shall be fitted with a 13 A fuse to [BS 1362:1973+A3:2021](#) and subjected to a test current of 1.6 times the rating of the fitted fuse for 60 min or until the fuse operates (if less than 60 min). Immediately afterwards the checks specified in [27.1.4](#) shall be made. Fused adaptors shall then be subjected to a test current of 1.9 times the rating of the fitted fuse for 30 min or until the fuse operates (if less than 30 min). Immediately afterwards the checks specified in [27.1.4](#) shall be made.
- 27.1.3** Unfused adaptors shall be subjected to a test current of 1.6 times the rating of the adaptor for 60 min. Immediately afterwards the checks specified in [27.1.4](#) shall be made. Unfused adaptors shall then be subjected to a test current of 1.9 times the rating of the adaptor for 30 min. Immediately afterwards the checks specified in [27.1.4](#) shall be made.

- 27.1.4** Each adaptor shall be checked for conformity with **10.1**, **13.7.1**, **13.8.1** and **13.13.1** except that the tests shall be performed at ambient temperature. Deterioration which does not compromise access to live parts (e.g. discolouration, distortion) shall be deemed to be acceptable. Inspection shall not reveal any damage to the adaptor which would impair its safety within the requirements of this part of **BS 1363**.

Annex A (normative)

Requirements for incorporated electronic components

A.1 General

Incorporated electronic components shall conform to their relevant standard(s).

NOTE Conformity with a standard for the relevant component does not necessarily ensure conformity with this standard.

A.2 Electromagnetic compatibility (EMC) requirements

Adaptors incorporating electronic circuits, apart from inherently benign components, shall conform to the immunity and emission requirements of the relevant product or generic [BS EN IEC 61000](#) standard series. In particular:

- a) [BS EN IEC 61000-6-1](#); and
- b) [BS EN IEC 61000-6-3](#).

NOTE Inherently benign components do not normally generate electromagnetic disturbances. Examples of inherently benign components are LED indicators, diodes, resistors, varistors, capacitors, surge suppressors, inductors. This list is not exhaustive.

No additional EMC immunity or emission tests are required if the following conditions are fulfilled:

- 1) the incorporated devices and components conform to the requirements for EMC as required by the relevant product or generic EMC standard; and
- 2) the internal installation and wiring is carried out in accordance with the devices and component manufacturer's instructions (arrangement with regard to mutual influences, cable, screening, earthing, etc.).

In all other cases the EMC requirements are to be verified by tests, in particular as per [BS EN IEC 61000-6-1](#) and [BS EN IEC 61000-6-3](#).

A.3 USB circuits intended for charging portable devices

A.3.1 General

USB circuits incorporated in an adaptor shall conform to the requirements of:

- a) [BS EN IEC 62368-1](#); or
- b) [BS EN 61558-2-16](#) and [BS EN 61558-2-6](#).

The USB circuits shall be tested as a component or sub assembly to [BS EN IEC 62368-1](#) or [BS EN 61558-2-16](#) and [BS EN 61558-2-6](#) and when incorporated into the adaptor the USB circuit shall meet the requirements of [BS EN IEC 62368-1](#) or [BS EN 61558-2-16](#) (used in conjunction with [BS EN 61558-2-6](#)) as applicable. Where a particular requirement is not considered to be applicable, or alternative means of meeting a requirement is used, then this shall not result in a lesser degree of safety with particular regard to reduction of the risks of fire, electric shock or injury for the operator or layman who might come into contact with the adaptor.

The following requirements relating to the appropriate use of the component or subassembly in the adaptor shall be met.

A.3.1.1 Power rating and identification markings

The input voltage rating of the USB circuit shall not be marked on the adaptor and shall not be less than the rated voltage of the adaptor.

Marking of the USB circuit output:

The following marking shall be visible after the adaptor has been installed as in normal use:

- a) symbol for nature of supply, for d.c. only;
- b) rated output power of USB port in watts, unless the output rating is expressed in volts and amperes.

A.3.2 Overcurrent and earth fault protection in primary circuits

Overcurrent protection shall be provided on the primary side of the USB circuit.

Where overcurrent protection is not provided within the USB circuit itself, provision shall be made for appropriate overcurrent protection in the supply to the USB circuit within the adaptor. The USB circuit shall not rely on the building or installation protection device for overcurrent protection.

NOTE Provision for overcurrent protection provided within the USB circuit can be verified by reference to the original test report.

A.3.2.1 Number and location of protective devices

A single overcurrent protection device shall be provided and it shall be located in the line circuit, either within the USB circuit or in the supply to the USB circuit within the adaptor.

A.3.2.2 Electrical insulation

Double or reinforced insulation shall be provided between the primary and secondary circuits of the USB circuit. The output of the USB circuit shall be SELV or equivalent.

When installed in the adaptor, double or reinforced insulation shall be provided between the primary circuit and accessible parts of the adaptor.

A.3.2.3 Clearances, creepage distances and distances through insulation

The USB circuit shall be designed and constructed to conform to the requirements of Overvoltage Category III.

NOTE USB circuits are generally tested as Overvoltage Category II whereas when they are incorporated in adaptors they are tested as Overvoltage Category III.

A.3.3 Disconnection from the mains supply

The requirement in [BS EN IEC 62368-1](#) for the provision of a disconnect device shall not apply.

NOTE The disconnect device specified in [BS EN IEC 62368-1](#) is provided by the adaptor plug pins.

A.3.4 Mechanical strength

The requirements of BS 1363-3:2023, Clause 21 shall be applied to the USB circuit when incorporated in the adaptor. The mechanical strength requirements of [BS EN IEC 62368-1](#) are not applicable.

A.3.4.1 Reducing the risk of ignition and spread of flame

Method 1: A fire enclosure shall be provided which meets the requirements of [BS EN IEC 62368-1](#); or

Method 2: Assessment and testing of all possible single fault tests shall be applied. In this case a fire enclosure is not required for equipment or that portion of equipment for which testing of all relevant components in both primary circuits and secondary circuits has been carried out.

Whichever method is selected, the material requirements of [Clause 23](#) and [Clause 24](#) shall also apply.

A.3.5 Abnormal conditions

Adaptors containing USB circuits shall not create a hazard under abnormal loading conditions.

No part shall reach such a temperature that there is danger of fire to the surroundings of the adaptor and there shall be no risk of electric shock or exposure to live parts.

Compliance is checked by subjecting the adaptor to a heating test under abnormal conditions as described below.

Adaptors shall be mounted, and mains loads applied as defined in [Clause 16](#).

a) Short circuit of USB outputs

A short circuit shall be applied across the power pins of each USB outlet in turn.

For adaptors having multiple USB outlets, each USB outlet shall be tested in turn and together if powered from separate internal charging circuits.

b) Over-load of USB outputs

USB outlets shall be loaded with the maximum current they are capable of continuously supplying without the output entering any shutdown or current limiting mode for the duration of this test.

In the case of adaptors having more than one USB outlet, the disposition of the load shall be so arranged as to give the most onerous test conditions with regard to the loading on the adaptor and the individual USB outlets.

A USB outlet shall be loaded with the maximum current it is able to deliver from the adaptor until such time as the current to that USB outlet is limited and controlled by the socket. At such time any additional possible load current shall then be loaded to additional USB outlets with the same conditions applying until such time as the maximum current achievable from the product is reached.

NOTE 1 For multiway adaptors it might be necessary to repeat the test multiple times with the loading on different outlets to cover all maximum loading on different USB outlet combinations.

For the purpose of this test a passive resistive load shall be used to provide the desired load current.

c) Component failure conditions

Component failure conditions defined in [BS EN IEC 62368-1](#); or [BS EN 61558-2-16](#) shall be applied.

During the test of a), b) and c) above:

- 1) no emission of flames or burning particles shall occur;
- 2) the operating temperature of electronic components marked with a rated operating temperature shall not exceed that temperature during the test; and
- 3) no part shall reach such a temperature that there is danger of fire to the surroundings of the electronic switches during the test and temperatures shall remain within the limits defined in [Clause 17](#).

Protection against electric shock is required during and after the test even though an electronic socket is being used or has been used under abnormal conditions. Compliance is checked by carrying out the tests of [Clause 10](#) immediately following the test for each abnormal condition.

NOTE 2 It is not required for the socket-outlet to be functional during or after the test.

A.3.6 Conformity

Conformity to [A.3.1](#) to [A.3.5](#) shall be verified by inspection of compliance evidence or by test.

A.4 Surge protective devices

A.4.1 General

Surge protective devices incorporated in BS 1363-3 adaptors shall conform to the requirements in [A.4.2](#).

NOTE 1 The use of SPDs, variously known as voltage dependant resistors (VDRs), gas discharge tubes, avalanche breakdown diodes and similar devices, might have particular applications and restrictions in their use in many safety standards. Restrictions are applied where the disconnection of earth is possible as a single fault condition (applicable for example, to domestic pluggable equipment).

NOTE 2 The slow deterioration of surge protection devices with time might result in an increase in leakage current. This can cause a permanent and continuously increasing temperature stress, which can cause the component to burn or burst, and thus SPDs/VDRs are regarded as potential safety hazards.

NOTE 3 This annex does not cover comprehensive type testing which is specified in the BS EN 61643 series.

A.4.2 Requirements

The following types of SPD of the appropriate category shall be considered acceptable:

- a) metal oxide varistors conforming to [BS EN 61643-331](#);
- b) gas discharge tubes conforming to [BS EN 61643-311](#);
- c) avalanche breakdown diodes conforming to [BS EN 61643-321](#).

VDRs conforming to [BS EN IEC 61051-2](#) and having the following characteristics shall be considered acceptable:

- 1) Preferred climatic categories:
 - i) Lower category temperature $-10\text{ }^{\circ}\text{C}$
 - ii) Upper category temperature $+85\text{ }^{\circ}\text{C}$
 - iii) Duration of damp heat, steady state test: 21 days
- 2) Maximum continuous voltage:
 - i) The maximum continuous a.c. voltage shall be not less than 315 V.
- 3) Pulse current ([BS EN IEC 61051-2:2021](#), Table 4, Group 1)
 - i) Combination pulses of 6 kV/3 kA of alternating polarity are used, having a pulse shape of 1.2/50 μs for voltage and 8/20 μs for current.

In addition to the performance requirements of [BS EN IEC 61051-2:2021](#), Table 4, Group 1, the clamping voltage after the test shall not have changed by more than 10%, when measured with the manufacturer's specified current.

A.4.3 Conformity

Conformity to [A.4.2](#) shall be checked by inspection of component conformity evidence.

A.4.4 Incorporation of VDRs in adaptors

A circuit interrupting device having adequate breaking capacity shall be connected in series with the VDR to provide protection against:

- a) temporary overvoltages above the maximum continuous voltage;

- b) thermal overload due to leakage current within the VDR; and
- c) burning and bursting of the VDR in the event of a short-circuit fault.

The following methods of VDR incorporation are permitted:

- Between L and N:

A VDR is permitted between line and neutral provided that it is protected by the [BS 1362:1973+A3:2021](#) fuse in the adaptor.

Where not protected by a [BS 1362:1973+A3:2021](#) fuse, a circuit interrupting device having adequate breaking capacity shall be incorporated within the product in series with the VDR.

- Between L and E:

A VDR is permitted between line and protective earth provided it is protected by the [BS 1362:1973+A3:2021](#) fuse in the adaptor and is connected in series with a spark gap/gas tube meeting the requirements for basic insulation; or

where not protected by a [BS 1362:1973+A3:2021](#) fuse a VDR is permitted between line and protective earth provided it is located in series with a circuit interrupting device having adequate breaking capacity, and is connected in series with a spark gap/gas tube meeting the requirements for basic insulation.

A.4.5 Conformity

Conformity to [A.4.4](#) shall be checked by inspection.

A.5 Electronic switches

A.5.1 General

Electronic switches incorporated in adaptors shall conform to [BS EN 60669-2-1](#).

A.5.2 Conformity

Conformity to [A.5.1](#) shall be checked by inspection of conformity evidence or by test.

Annex B (normative)

Pollution degree

COMMENTARY ON ANNEX B

The micro environment determines the effect of pollution on the insulation. The macro environment, however, has to be taken into account when considering the micro environment.

Means might be provided to reduce pollution at the insulation under consideration by effective use of enclosures, encapsulation or hermetic sealing. Such means to reduce pollution might not be effective when the PT system is subject to condensation or if, in normal operation, it generates pollutants itself.

Small clearances can be bridged completely by solid particles, dust and water and therefore minimum clearances are specified where pollution might be present in the micro environment.

Pollution will become conductive in the presence of humidity. Pollution caused by contaminated water, soot, metal or carbon dust is inherently conductive.

Degrees of pollution in the micro-environment

For the purpose of evaluating creepage distances and clearances, the following three degrees of pollution in the micro-environment as defined in [BS EN IEC 60664-1](#) shall be used.

Pollution degree 1

No pollution or only dry, non-conductive pollution occurs. The pollution has no influence.

Pollution degree 2

Only non-conductive pollution occurs except that occasionally a temporary conductivity caused by condensation is to be expected.

Pollution degree 3

Conductive pollution occurs or dry non-conductive pollution occurs which becomes conductive due to condensation which is to be expected.

Annex C (normative)

Relation between rated impulse withstand voltage, rated voltage and Overvoltage Category

Table C.1 gives the rated impulse withstand voltage that shall be used for adaptors energized directly from the low voltage mains.

Table C.1 — *Rated impulse withstand voltage for adaptors energized directly from the low voltage mains*

| Nominal voltage of the supply system based on IEC 60038 ^{A)} | Voltage line-to-neutral derived from nominal voltages a.c. or d.c. up to and including | Rated impulse withstand voltage | | |
|---|--|---------------------------------|-------|-------|
| | | Overvoltage Category | | |
| V | V | I | II | III |
| 230/400 | 300 | 1 500 | 2 500 | 4 000 |

NOTE 1 For more information concerning supply systems see [BS EN IEC 60664-1](#).

NOTE 2 For more information concerning Overvoltage Category see [BS EN IEC 60664-1](#).

NOTE 3 Adaptors fall into Overvoltage Category III. Parts of adaptors where appropriate overvoltage reduction is provided fall into Overvoltage Category I. Energy consuming equipment falls into Overvoltage Category II.

^{A)} The / mark indicates a four wire three phase distribution system. The lower value is the voltage line to neutral, while the higher value is the voltage line to line.

Annex D (normative)

Determination of the Comparative Tracking Index and Proof Tracking Index

The Comparative Tracking Index (CTI) or Proof Tracking Index (PTI) shall be determined in accordance with [BS EN IEC 60112:2020](#).

For the purpose of this standard the following applies.

- a) In [BS EN IEC 60112:2020](#), Clause 5, Test sample:
 - 1) Note 3 and the last paragraph also apply to PTI; and
 - 2) if the surface 15 mm × 15 mm cannot be obtained because of the small dimensions of the PT system then special samples made with the same manufacturing process might be used.
- b) The test solution “A” described in [BS EN IEC 60112:2020](#), 7.3, shall be used.
- c) In [BS EN IEC 60112:2020](#), Clause 8, Procedure, either CTI or PTI is determined.
 - 1) CTI is determined in accordance with [BS EN IEC 60112:2020](#), Clause 11.
 - 2) The PTI test of [BS EN IEC 60112:2020](#), Clause 10 is performed on five samples at the voltage referred to in [BS EN IEC 60112:2020](#), 10.1 based on the appropriate creepage distance, material group, pollution degree conditions and on the rated voltage of this standard declared by the manufacturer.

Annex E (normative)

Impulse voltage test

The purpose of this test is to verify that clearances will withstand specified transient overvoltage. The impulse withstand voltage test shall be carried out with a voltage having a 1.2/50 µs waveform as specified in [BS EN 61180:2016](#), Clause 7 and is intended to simulate overvoltage of atmospheric origin. It also covers overvoltages due to switching of low voltage equipment.

The test shall be conducted for a minimum of three impulses of each polarity with an interval of at least 1 s between pulses. There shall be no discharges during the test. Glow discharges without a drop in voltage shall be ignored.

For solid insulation and for clearances not checked by measurement, the impulse withstand voltage shall be applied between:

- a) line and neutral terminals/terminations;
- b) line and neutral terminals/terminations connected together and:
 - 1) a sheet of metal foil in contact with the entire accessible external surface;
 - 2) the earthing terminal/termination;
 - 3) any metal part of a cable anchorage;
- c) each switched pole of a switched adaptor and corresponding plug pin, with the switch contacts open.

NOTE 1 The output impedance of the impulse generator should not be higher than 500 Ω.

NOTE 2 The expression “discharge” is used to cover the phenomena associated with the failure of insulation under electric stress, which include current flow and a drop in voltage.

The impulse shall have the following characteristics: the waveform 1.2/50 µs for the no-load voltage with amplitudes equal to the values given in [Table E.1](#).

NOTE 3 If the sample is provided with surge suppression the impulse voltage wave may be chopped but the sample should be in a condition to operate normally again after the test. If the sample is not provided with surge suppression and it withstands the impulse voltage, the waveform will not be noticeably distorted.

Table E.1 — Test voltages for verifying clearances at sea level

| Rated impulse withstand voltage, \hat{U} kV | Impulse test voltage at sea level, \hat{U} kV |
|--|--|
| 0.33 | 0.35 |
| 0.5 | 0.55 |
| 0.8 | 0.91 |
| 1.5 | 1.75 |
| 2.5 | 2.95 |
| 4.0 | 4.8 |
| 6.0 | 7.3 |

NOTE 1 When testing clearances, associated solid insulation will be subjected to the test voltage. As the impulse test voltage of [Table E.1](#) is increased with respect to the rated impulse withstand voltage, solid insulation will have to be designed accordingly. This results in an increased impulse withstand capability of the solid insulation.

NOTE 2 The test may be made with the pressure adjusted to the value corresponding to the altitude of 2 000 m (80 kPa) and 20 °C with the test voltage corresponding to the rated impulse withstand voltage. In this case, solid insulation will not be subjected to the same withstand requirements as when testing at sea level.

NOTE 3 Explanations concerning the influencing factors (air pressure, altitude, temperature humidity) with respect to electric strength of clearances are given in [BS EN IEC 60664-1](#).

Annex F (normative)

Measurement of clearances and creepage distances

The width X specified in [Figure F.1](#) to [Figure F.11](#) shall apply to all examples as a function of the pollution degree as given in [Table F.1](#).

Table F.1 — Minimum values of width, X

| Pollution degree | Minimum values of width, X mm |
|------------------|------------------------------------|
| 1 | 0.25 |
| 2 | 1.0 |
| 3 | 1.5 |

If the associated clearances are less than 3 mm, the minimum groove width might be reduced to one third of this clearance.

The methods of measuring creepage distances and clearances are indicated in the following [Figure F.1](#) to [Figure F.11](#). These cases do not differentiate between gaps and grooves or between types of insulation.

The following assumptions are made:

- any recess is assumed to be bridged with an insulating link having a length equal to the specified width X and being placed in the most unfavourable position (see [Figure E.3](#));
- where the distance across a groove is equal to or larger than the specified width X , the creepage distance is measured along the contours of the groove (see [Figure E.2](#)); and
- creepage distances and clearances measured between parts which might assume different positions in relation to each other, are measured when these parts are in their most unfavourable position.

Key for [Figure E.1](#) to [Figure E.11](#)

----- clearance
 ————— creepage distance

NOTE All dimensions are in millimetres.

Figure F.1 — *Example 1*

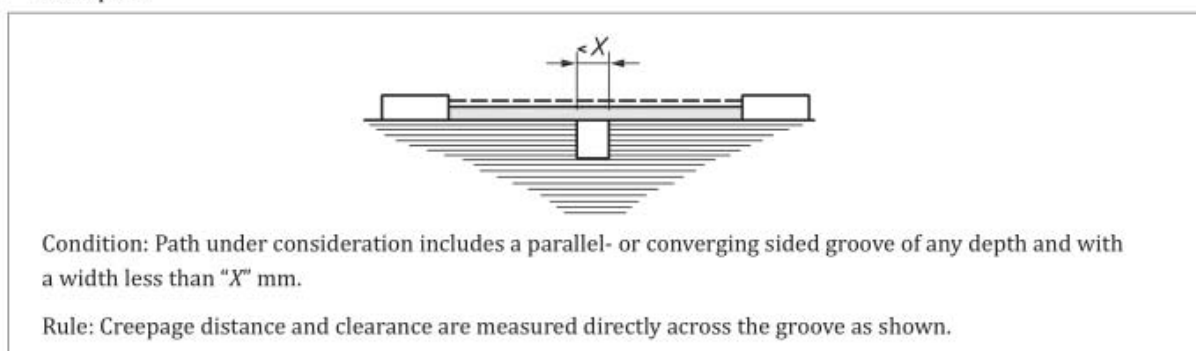


Figure F.2 — *Example 2*

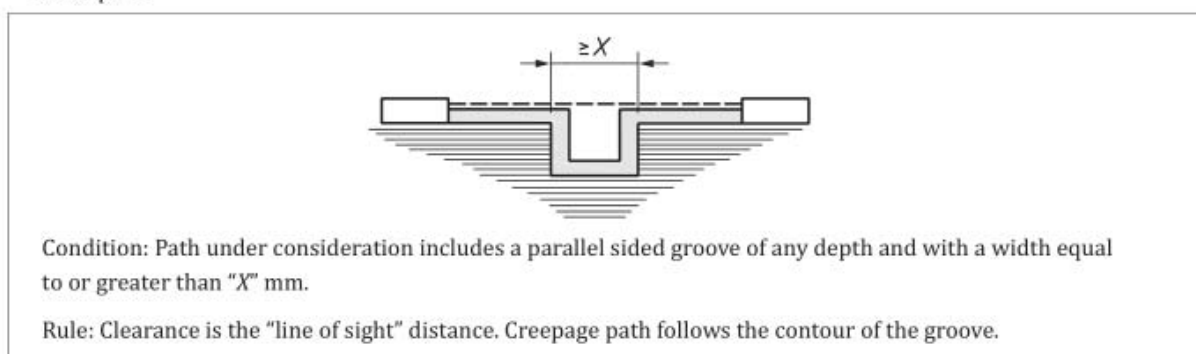


Figure F.3 — *Example 3*

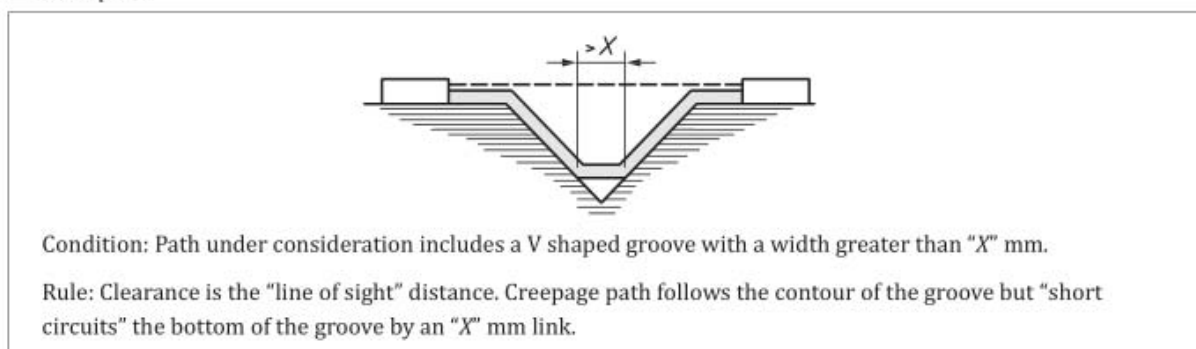


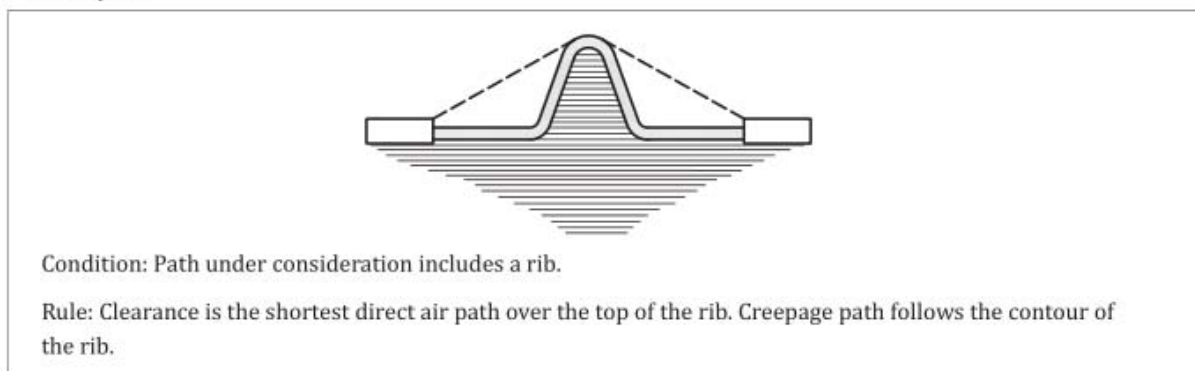
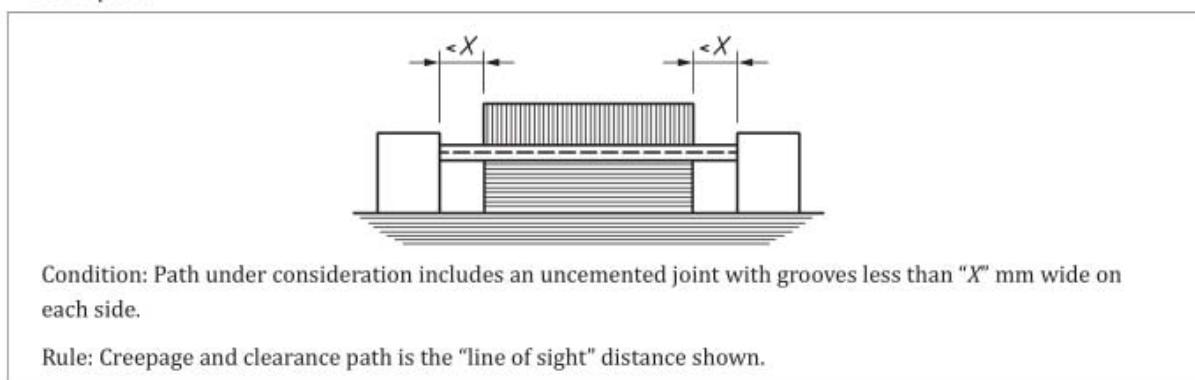
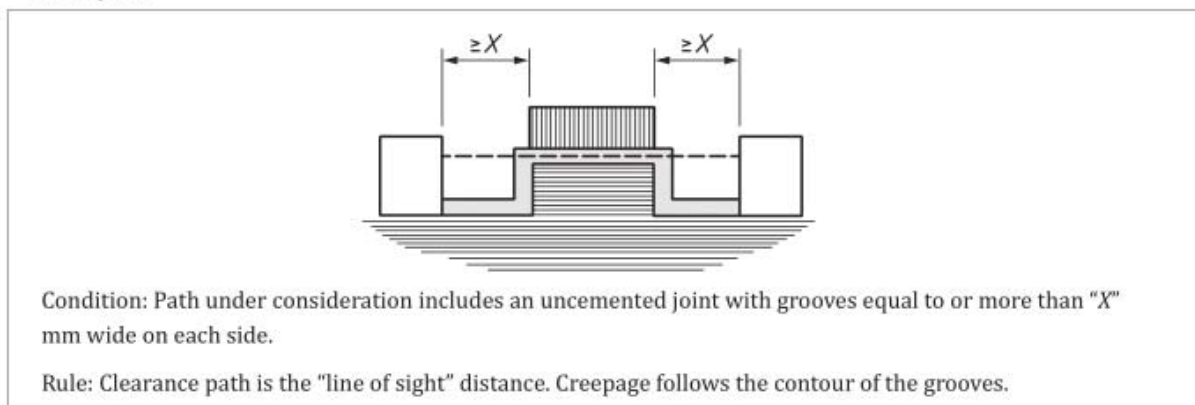
Figure F.4 — *Example 4***Figure F.5** — *Example 5***Figure F.6** — *Example 6*

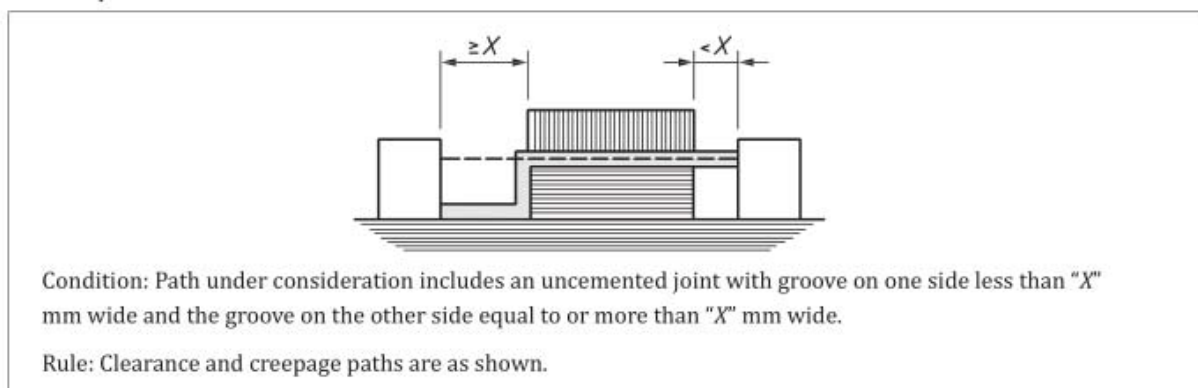
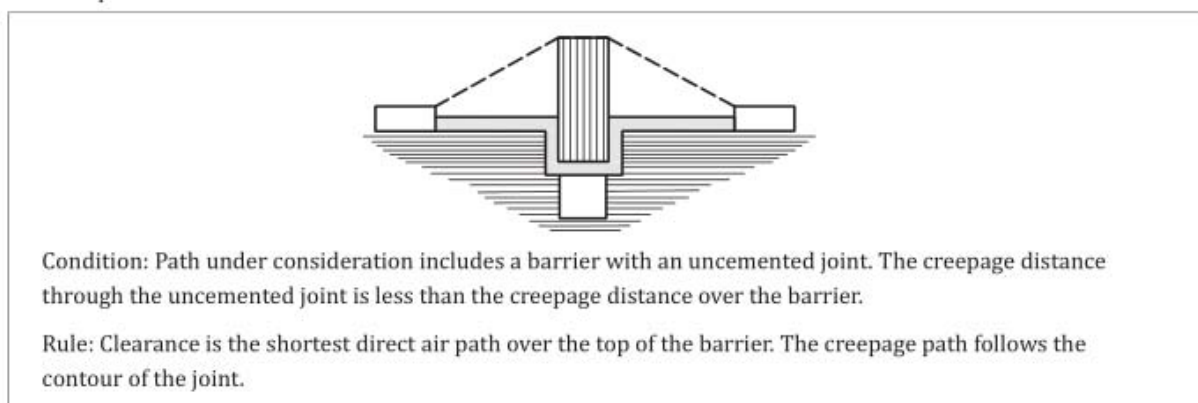
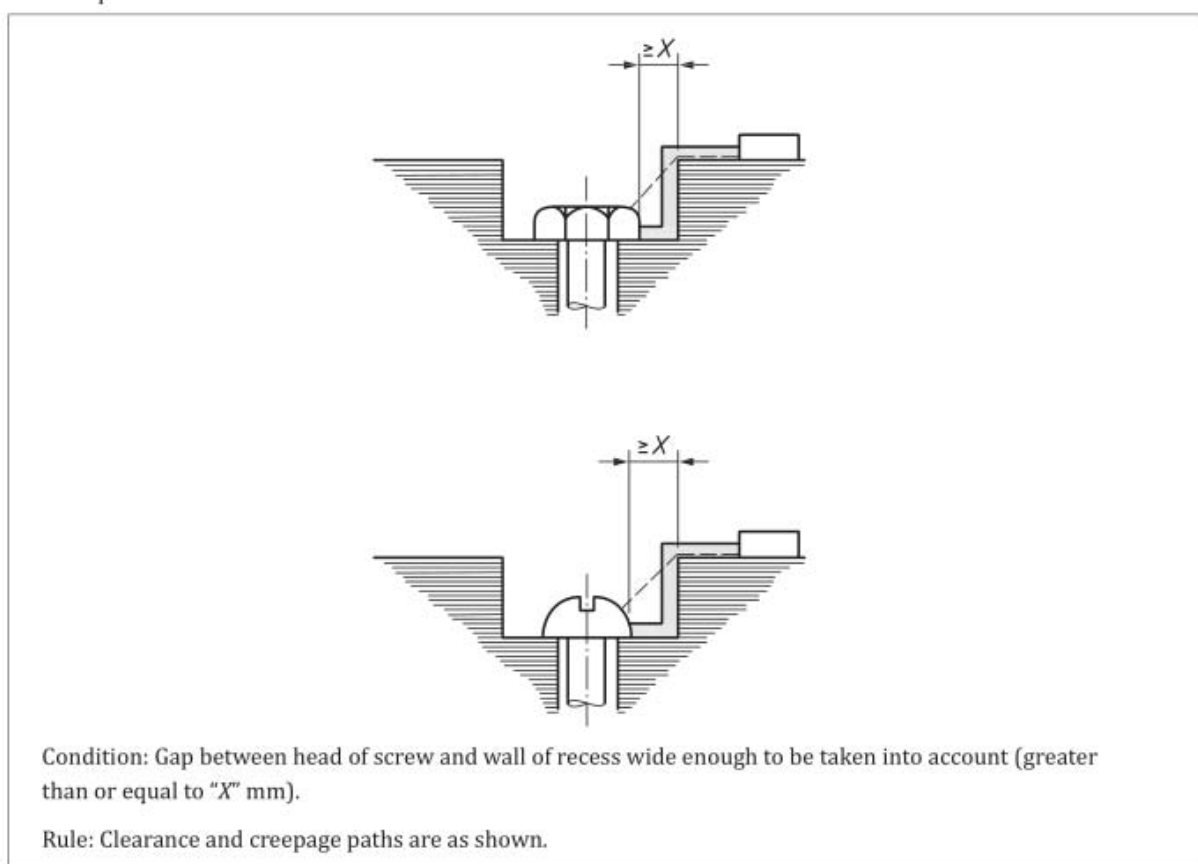
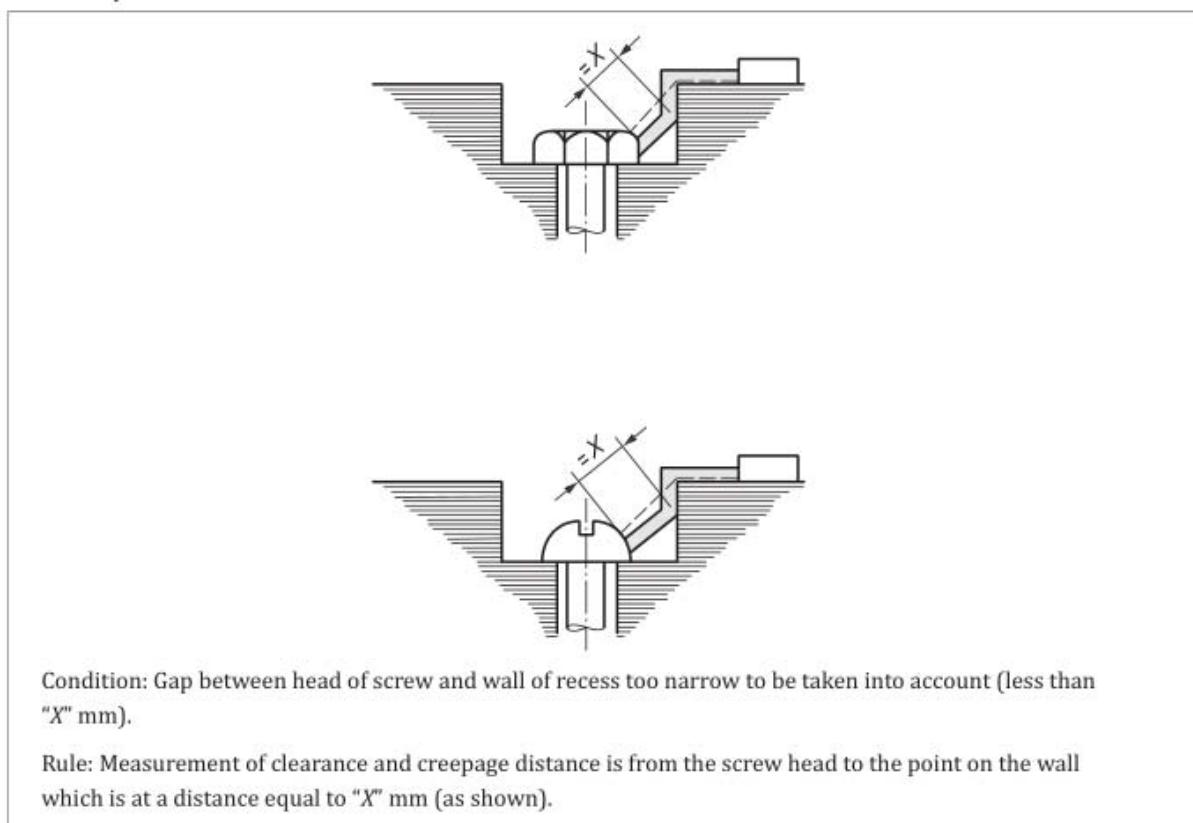
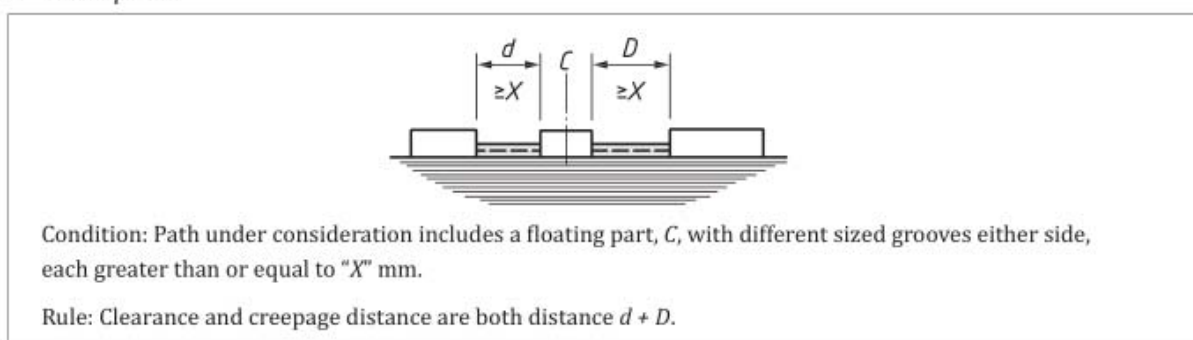
Figure F.7 — Example 7**Figure F.8** — Example 8**Figure F.9** — Example 9

Figure F.10 — *Example 10***Figure F.11** — *Example 11*

Annex G (normative)

Test plug for temperature rise test


G.1 General

The test plug consists of a body made from insulating material and pins of brass. The pin dimensions and centres are shown in [Figure 4a](#)) and [Figure 4b](#)).

Inside the test plug a ceramic covered wire wound resistor is clamped to the line pin making no electrical contact between the pin and the resistor element, though good thermal contact is essential. Thermal contact compound shall be used on the interface between the ceramic resistor body and the metal clamp. The M3.5 clamp screw shall be tightened to a torque of $0.2 \text{ Nm} \pm 0.02 \text{ Nm}$. The resistor leads pass through the sides or cover of the test plug. Approximately 1 000 mm of 3-core flexible

cable as given in [BS EN 50525-2-11:2011](#) with nominal cross-sectional area of 1.25 mm^2 is connected to the plug by soldering the line and neutral cores to their respective plug pins. The earth conductor of the cable is not connected to the earth pin. Details are shown in [Figure 30](#).

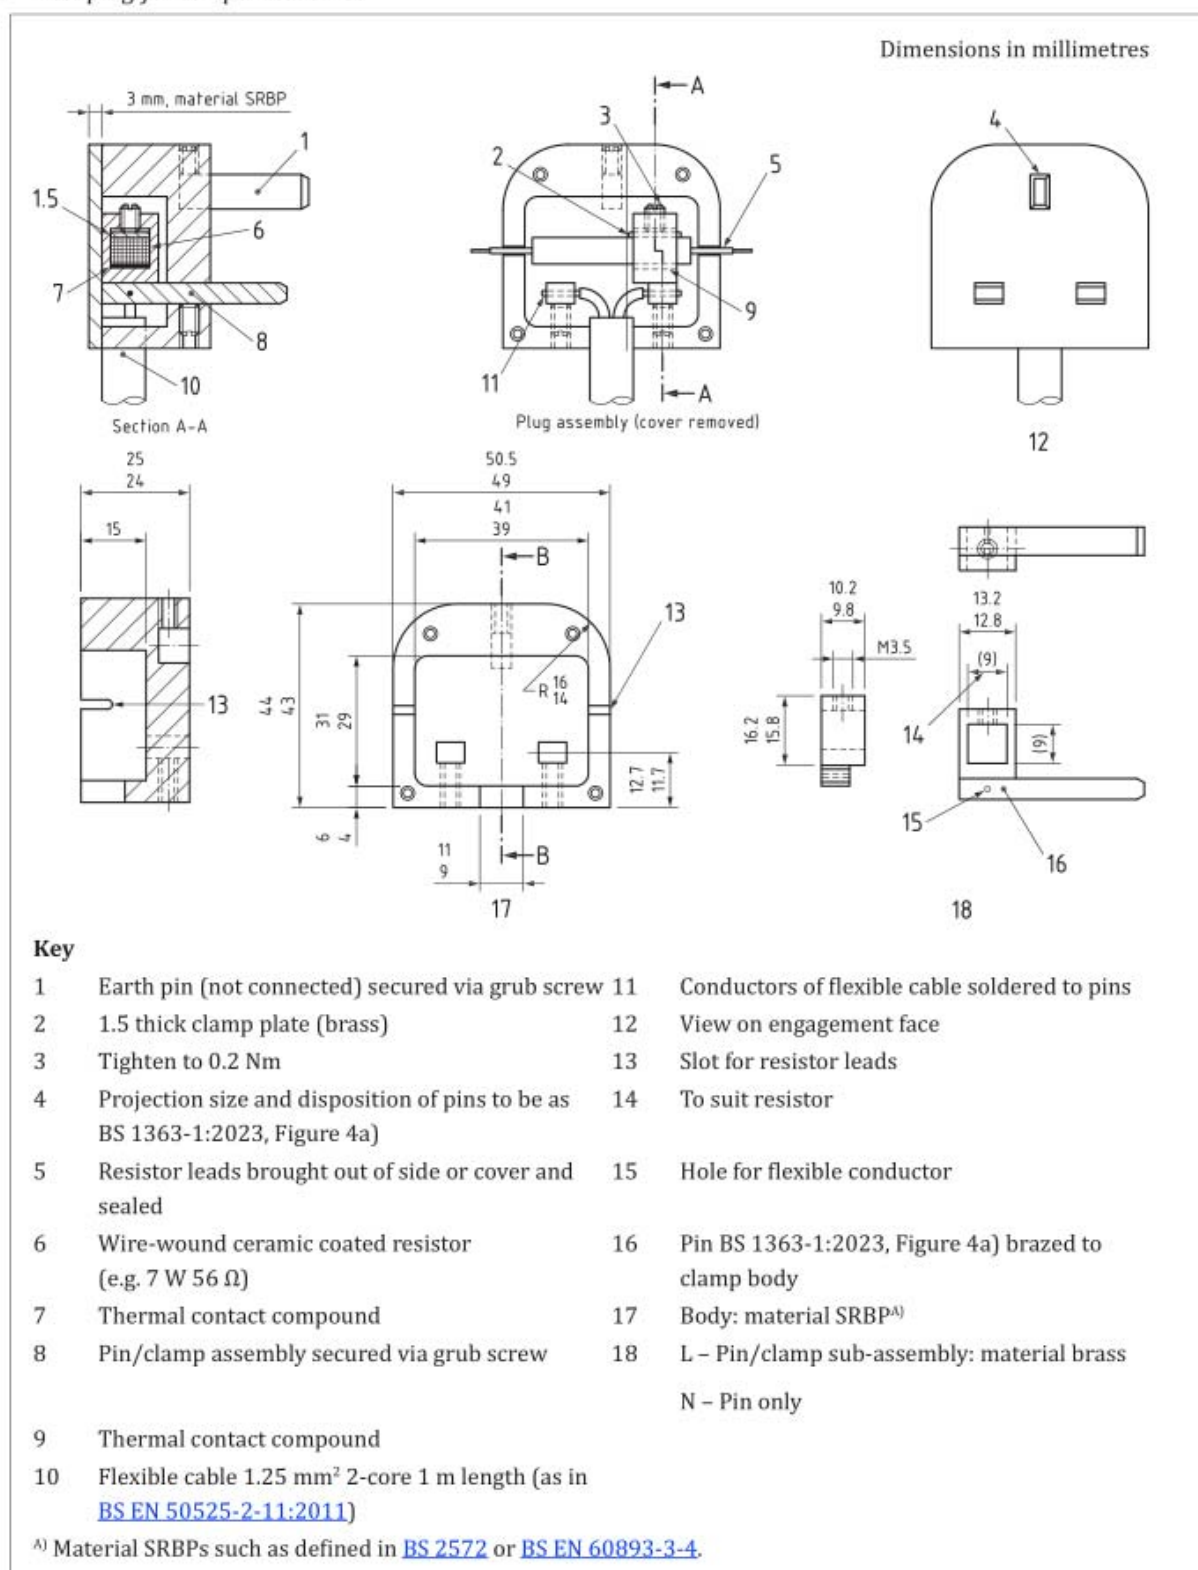Figure 30 — Test plug for temperature rise



G.2 Calibration

The test plug is mounted in the dummy front plate [see [Figure 17a](#)] and the test carried out in accordance with [17.1.2](#) with $14\text{ A} \pm 0.2\text{ A}$ flowing through the flexible cable attached to the plug. At the same time, a separate low voltage d.c. supply is connected to the resistor and the voltage adjusted until the temperature rise on the plug pin spacer stabilizes at $35\text{ K} \pm 1\text{ K}$. The value of the voltage applied to the resistor is noted. The calibration voltage is applied to the resistor when checking the temperature rise of a socket-outlet.

Annex H (normative)

The construction and calibration of a calibrated link

H.1 Construction

The calibrated link (see [Figure 28](#)) shall employ the following components used to produce fuses conforming to [BS 1362:1973+A3:2021](#):

- a) ceramic body (as standard);
- b) filling (as standard);
- c) end caps [modified standard cap as shown in [Figure 28a](#)].

The resistive element shall be of copper nickel wire having a resistivity value between $44\text{ }\mu\Omega\cdot\text{cm}$ and $49\text{ }\mu\Omega\cdot\text{cm}$. The overall length shall be $25.4^{+0.8}_{-0.4}\text{ mm}$ and the diameter such as to allow a small reduction in the cross sectional area to adjust the watts loss to the required value. The ends shall be turned down so that the distance between the shoulders so formed shall be $25.4^{+0.8}_{-0.4}\text{ mm}$ less twice the end cap end wall thickness t [see [Figure 28b](#)].

The resistive element shoulders shall be firmly butted to the inside faces of the end caps and soldered using a tin-silver solder, alloy No. 701 as specified in [BS EN ISO 9453:2020](#), or other tin-silver solder with a silver content not less than 3.5%, e.g. grade 96S as specified in [BS 219:1977](#). The assembly thus formed [see [Figure 28c](#)] shall be checked for watts loss in accordance with [H.2](#). Metal shall then be carefully filed from the resistive element over as long a length as is possible and the assembly rechecked until the desired watts loss is achieved.

One end cap shall then be unsoldered, a standard ceramic body fitted, the cavity filled and the end cap resoldered in position making sure the shoulder of the element is butted to the inside face of the end cap; the ceramic body shall not interfere with this condition [see [Figure 28d](#)]. The watts loss shall be rechecked in accordance with [H.2](#) and adjusted if necessary.

The resulting calibrated link shall be marked "NOT A FUSE" on the ceramic body and shall dimensionally be in accordance with [BS 1362:1973+A3:2021](#).

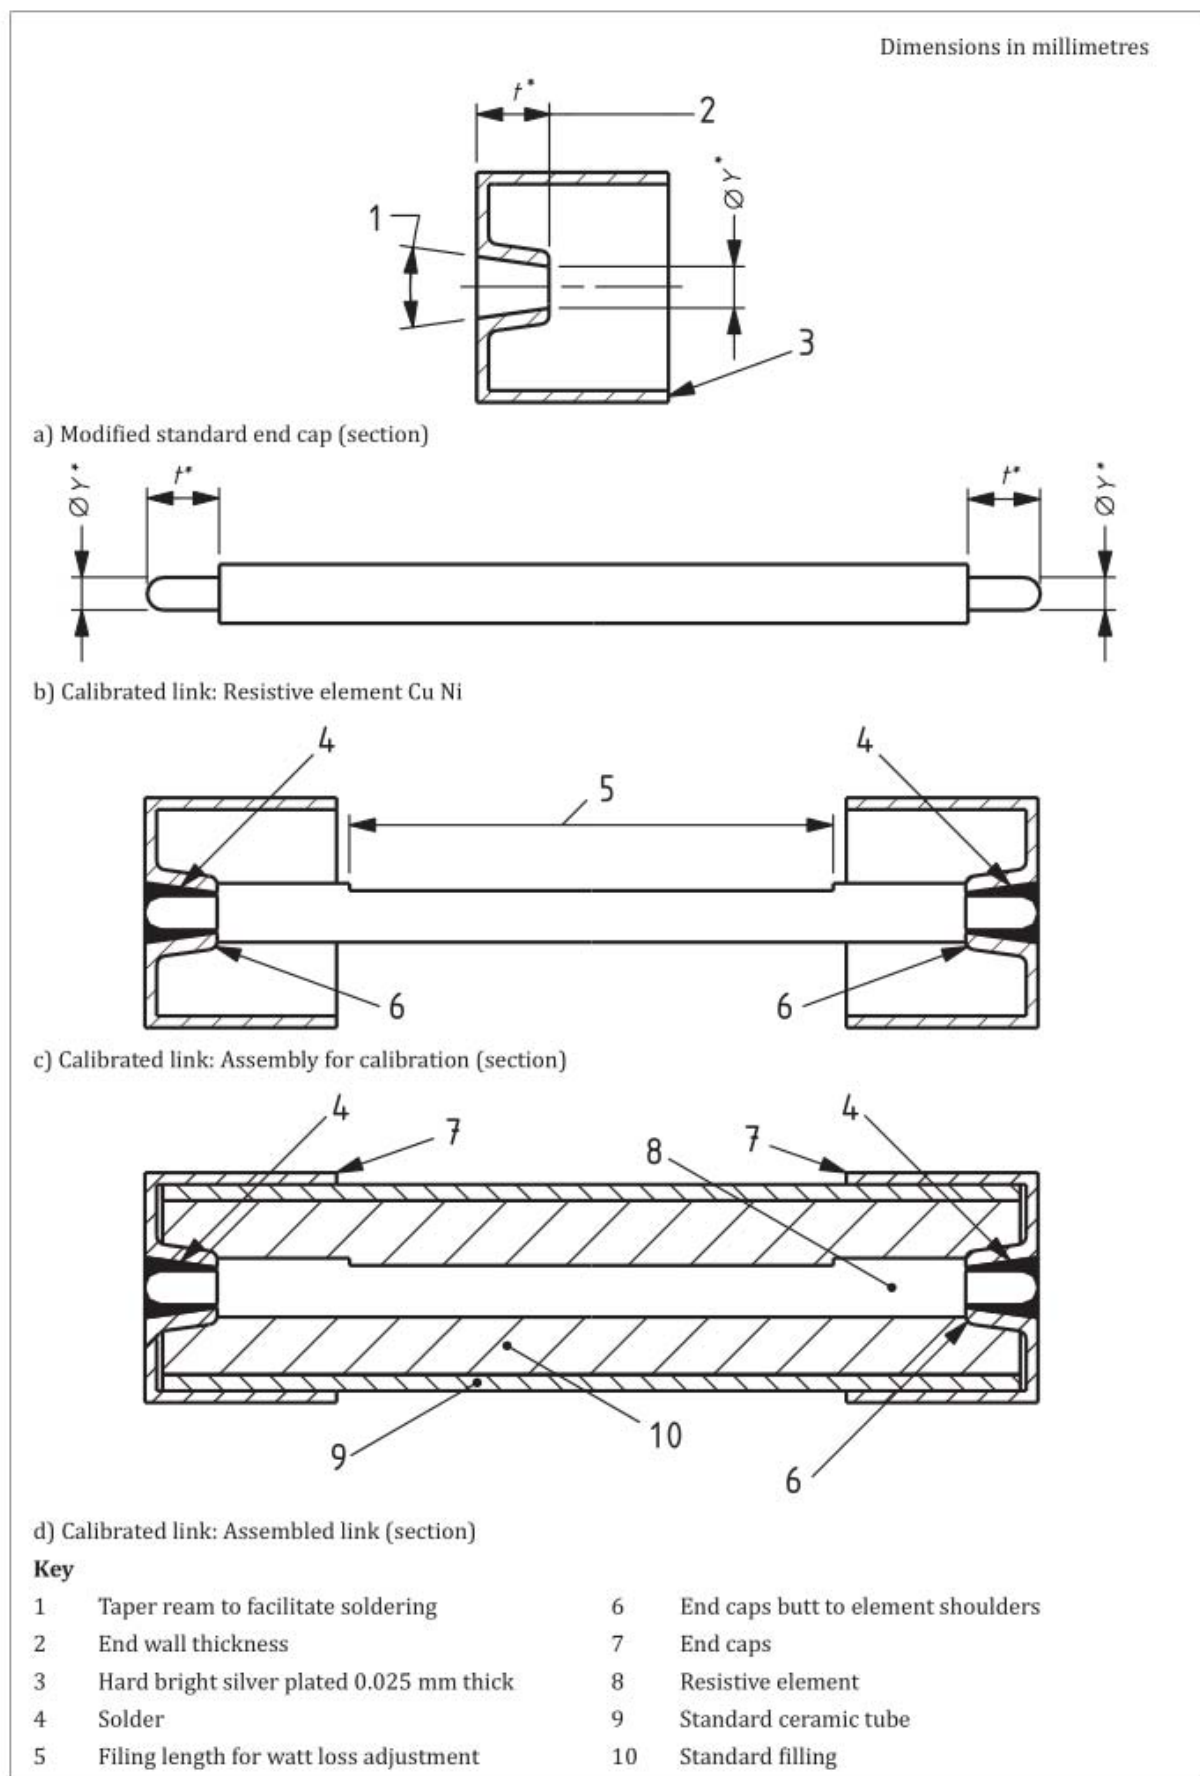
Figure 28 — *Calibrated link*

Figure 28 — *Calibrated link (continued)*

NOTE This drawing is not intended to govern design except as regards the dimensions and specific requirements shown. * See **H.1**.

H.2 Calibration

The calibration jig shown in [Figure 29](#) shall be mounted horizontally approximately 25 mm above a wooden board by means of two ceramic pillars. A fine wire thermocouple shall be attached to the centre of each fuse contact clip, on the outside of the top edge, in such a way that it does not interfere with the contact area. The thermocouples shall be taken out of the box in slots cut in one end of the jig base, the width of the slots just being sufficient to accept the diameter of the thermocouples. The connection to the jig base shall be by means of PVC insulated single core copper cables, 0.3 m \pm 0.05 m in length and 2.5 mm² cross section.

The surroundings shall be free from draughts and the ambient air temperature, measured by a suitable thermometer or thermocouple at horizontal distance of 1 m to 2 m from the standard link shall be in the range of 15 °C to 25 °C. The standard link shall be inserted into the clips provided in the calibration jig and the cover replaced. A current of 13 A \pm 0.1 A is passed continuously through the calibrated link for 60 min \pm 5 min. At the end of this time, the temperatures measured by the thermocouples shall be noted, the cover of the jig shall then be removed and the millivolt drop between the end surfaces of the end caps of the calibrated link shall be measured while it is still carrying the test current.

Alternating current (a.c.) voltage shall be used for the calibration.

The calibration shall be considered to be correct when the following apply:

- a) the product of the measured millivolt drop multiplied by the test current gives a result of: $25.4^{+0.8}_{-0.4}$ W; and
- b) the temperature difference between the fuse contact clips does not exceed 2 °C.

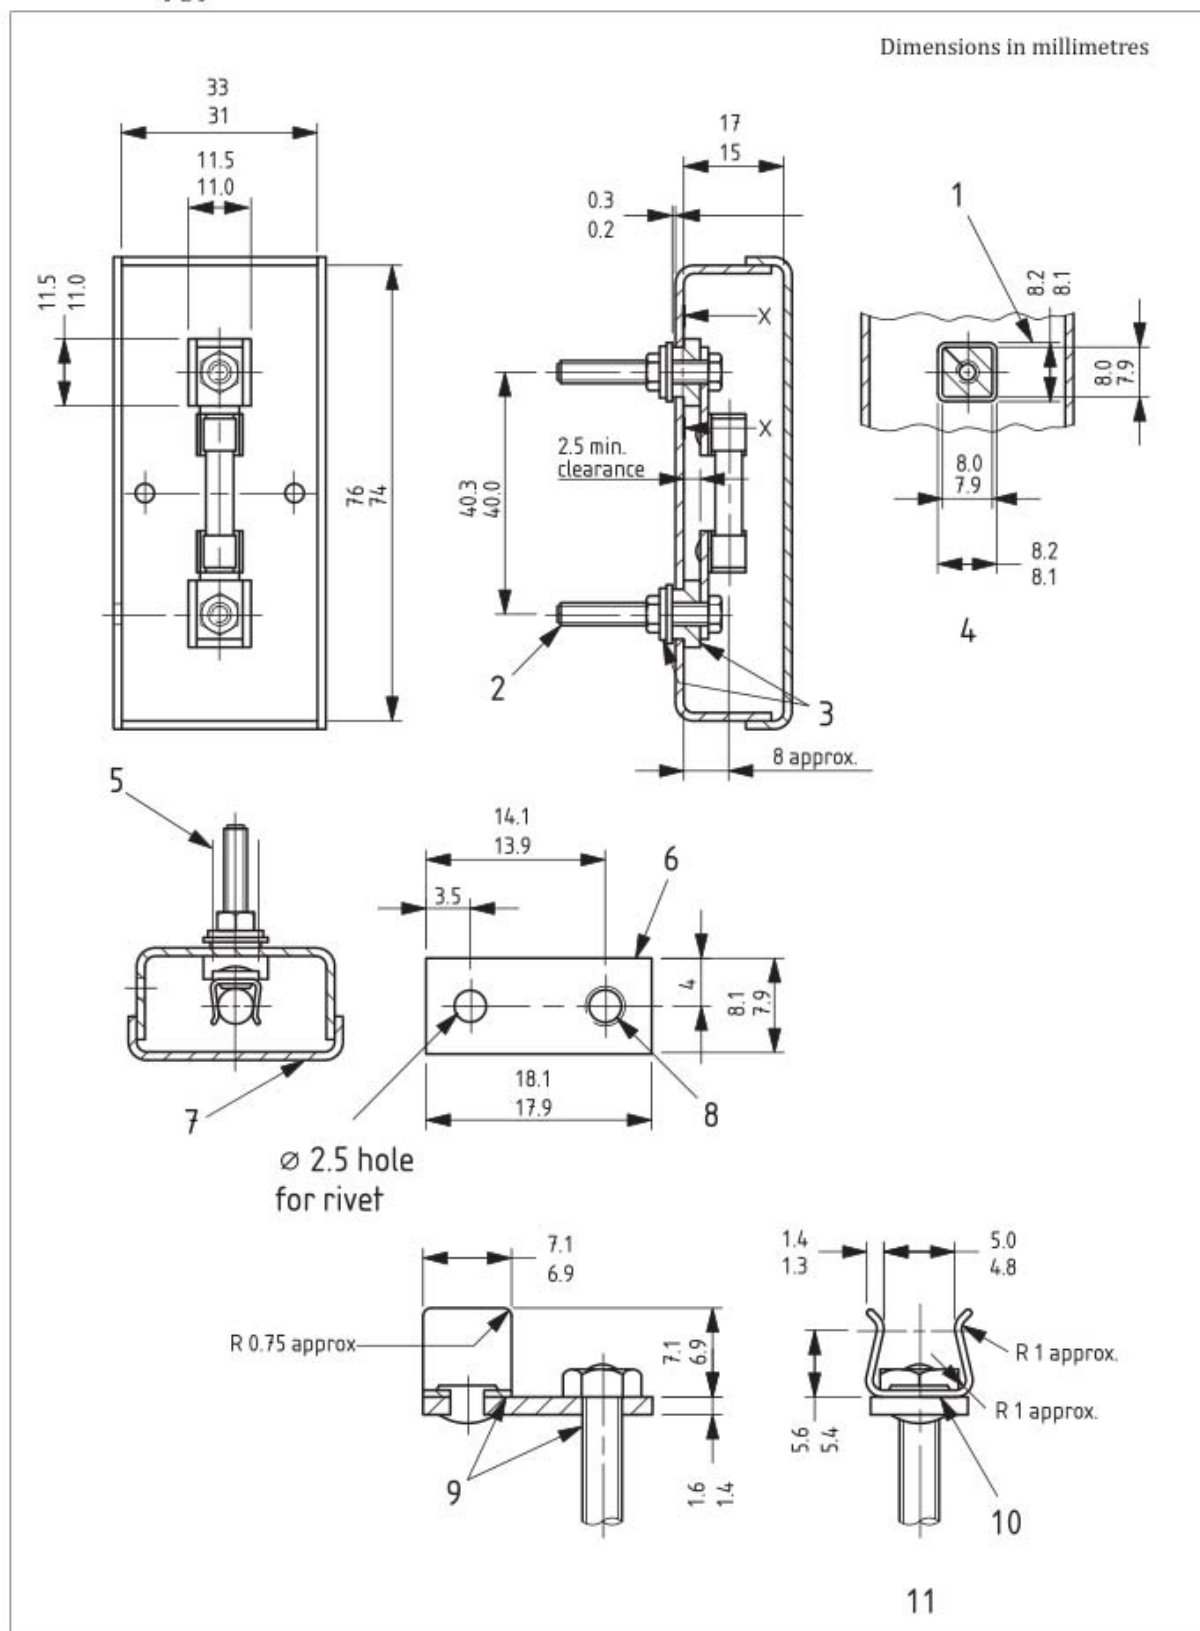
Figure 29 — Calibration jig for calibrated link

Figure 29 — Calibration jig for calibrated link (continued)

| Key | |
|-----|---|
| 1 | Float ^{A)} |
| 2 | Terminal stem M3 × 25 |
| 3 | Insulating material |
| 4 | Part section X X ^{A)} |
| 5 | Groove to fit contact plate |
| 6 | Contact plate, brass |
| 7 | Cover ^{B), C)} |
| 8 | Hole tapped M3 for terminal stem |
| 9 | Joints between clip, contact plate and terminal stem to be soldered |
| 10 | Fuse clip ^{D)} |
| 11 | Contact assembly |

^{A)} The end float and clearance between the insulation and the box is to allow the contacts to be self-aligning.

^{B)} Box and cover made from 1.25 mm brass sheet, clean natural finish.

^{C)} Cover shall be a push fit on box and shall not be rigidly attached.

^{D)} Fuse clip made from beryllium copper 0.45 mm thick and heat treated (170 HV minimum). Base of clip to be flat; finish, silver plated.

Annex I (informative)

Annex identification migration from 2016 edition to 2023 edition

Table I.1 gives details of the annex renumbering from the 2016 editions of BS 1363, Part 1 to Part 5 to the 2023 editions.

Table I.1 — BS 1363 annex identification migration from 2016 to 2023

| Annex title | Annex reference | | | | | | | | | |
|--|------------------------|----------------|------------------------|----------------|------------------------|----------------|------------------------|----------------|----------------|----------------|
| | BS 1363 Part 1 | | BS 1363 Part 2 | | BS 1363 Part 3 | | BS 1363 Part 4 | | BS 1363 Part 5 | |
| | BS 1363-1:2016+A1:2018 | BS 1363-1:2023 | BS 1363-2:2016+A1:2018 | BS 1363-2:2023 | BS 1363-3:2016+A1:2018 | BS 1363-3:2023 | BS 1363-4:2016+A1:2018 | BS 1363-4:2023 | BS 1363-5:2016 | BS 1363-5:2023 |
| The construction and calibration of a calibrated link | A | H | A | G | A | H | A | F | A | F |
| Measurement of clearances and creepage distances | B | F | B | E | B | F | B | E | B | E |
| Determination of the Comparative Tracking Index and Proof Tracking Index | C | I | C | F | C | D | C | C | C | C |
| Relation between rated impulse withstand voltage, rated voltage and Overvoltage Category | D | D | D | C | D | C | D | B | D | B |
| Pollution degree | E | C | E | B | E | B | E | A | E | A |
| Impulse voltage test | F | E | F | D | F | E | F | D | F | D |
| Requirements for incorporated electronic components | G | A | I | A | H | A | - | - | - | - |
| Specific structure of BS EN 50525 and its derivation from British Standards and from HD 21 and HD 22 | H | - | H | - | I | - | G | - | - | - |

Table I.1 — BS 1363 annex identification migration from 2016 to 2023 (continued)

| Annex title | Annex reference | | | | | | | | | |
|--|----------------------------|--------------------|----------------------------|--------------------|----------------------------|--------------------|----------------------------|--------------------|--------------------|--------------------|
| | BS 1363 Part 1 | | BS 1363 Part 2 | | BS 1363 Part 3 | | BS 1363 Part 4 | | BS 1363 Part 5 | |
| | BS 1363- 1:2016+A1:2018 | BS 1363- 1:2023 | BS 1363- 2:2016+A1:2018 | BS 1363- 2:2023 | BS 1363- 3:2016+A1:2018 | BS 1363- 3:2023 | BS 1363- 4:2016+A1:2018 | BS 1363- 4:2023 | BS 1363- 5:2016 | BS 1363- 5:2023 |
| Recommendations for products that incorporate BS 1363-1 plug pins | I | B | - | - | - | - | - | - | - | - |
| Dimensions for plug profiles | J | G | - | - | - | - | - | - | - | - |
| Test plug for temperature rise test | - | - | G | H | G | G | - | - | - | - |
| Recommendations for products that incorporate BS 1363-2 socket-outlets | - | - | - | I | - | - | - | - | - | - |
| Annex identification migration from 2016 edition to 2023 edition | - | J | - | J | - | I | - | G | - | G |

Bibliography

For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

Standards publications

BS 219:1977, *Specification for soft solders*

BS 1363-4, *13 A plugs, socket-outlets, adaptors and connection units – Part 4: 13 A fused connection units: switched and unswitched – Specification*

BS 1363-5, *13 A plugs, socket-outlets, adaptors and connection units – Part 5: Fused conversion plugs – Specification*

[BS 2870:1980](#), *Specification for rolled copper and copper alloys: sheet, strip and foil*

[BS 8546](#), *Travel adaptors compatible with UK plug and socket system – Specification*

[BS EN 61140](#), *Protection against electric shock – Common aspects for installation and equipment*

[BS EN 60893-3-4:2004+A1:2012](#), *Insulating materials – Industrial rigid laminated sheets based on thermosetting resins for electrical purposes – Part 3-4: Specifications for individual materials – Requirements for rigid laminated sheets based on phenolic resins*

[BS EN IEC 60664-1:2020](#), *Insulation coordination for equipment within low-voltage supply systems – Part 1: Principles, requirements and tests*

BS EN IEC 60730 (all parts), *Automatic electrical controls*

Other publications

- [1] GREAT BRITAIN. The Plugs and Sockets etc. (Safety) Regulations 1994. SI No. 1768. London: HMSO.

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Copyright in BSI publications

All the content in BSI publications, including British Standards, is the property of and copyrighted by BSI or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use.

Save for the provisions below, you may not transfer, share or disseminate any portion of the standard to any other person. You may not adapt, distribute, commercially exploit or publicly display the standard or any portion thereof in any manner whatsoever without BSI's prior written consent.

Storing and using standards

Standards purchased in soft copy format:

- A British Standard purchased in soft copy format is licensed to a sole named user for personal or internal company use only.
- The standard may be stored on more than one device provided that it is accessible by the sole named user only and that only one copy is accessed at any one time.
- A single paper copy may be printed for personal or internal company use only.

Standards purchased in hard copy format:

- A British Standard purchased in hard copy format is for personal or internal company use only.
- It may not be further reproduced – in any format – to create an additional copy. This includes scanning of the document.

If you need more than one copy of the document, or if you wish to share the document on an internal network, you can save money by choosing a subscription product (see 'Subscriptions').

Reproducing extracts

For permission to reproduce content from BSI publications contact the BSI Copyright and Licensing team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email cservices@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Useful Contacts

Customer Relations

Tel: +44 345 086 9001

Email: cservices@bsigroup.com

Subscription Support

Tel: +44 345 086 9001

Email: subscription.support@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright and Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK