

الهيئة السعودية للمواصفات والمقاييس والجودة  
Saudi Standards, Metrology and Quality Org (SASO)



**SASO 2902: 2018**

**ENERGY EFFICIENCY, FUNCTIONALITY AND  
LABELLING REQUIREMENTS FOR LIGHTING  
PRODUCTS  
PART 2**

**ICS: 91.160.01**

# **ENERGY EFFICIENCY, FUNCTIONALITY AND LABELLING REQUIREMENTS FOR LIGHTING PRODUCTS**

## **PART 2**

## Table of contents

|   |    |
|---|----|
| Table of contents .....   | 3  |
| Table of tables .....   | 5  |
| 1. Scope.....   | 6  |
| 2. Reference Standards .....  | 7  |
| 2.1 Safety and Electromagnetic Compatibility standards .....  | 7  |
| 2.2 Functional and energy performance standards.....  | 7  |
| 3. Terms and definitions.....   | 8  |
| 3.1 General.....  | 8  |
| 3.2 Technical .....   | 8  |
| 4. Requirements for non-directional/directional lamps, control gears and luminaires.....            | 14 |
| 4.1 Energy efficiency requirements .....  | 14 |
| 4.2 Functionality requirements .....  | 14 |
| 4.3 Marking requirements.....   | 15 |
| 4.4 Energy efficiency label .....   | 15 |
| 4.5 Hazardous chemicals: Substance restrictions for lamps and control gears .....                   | 15 |
| 5. Registration requirements.....   | 15 |
| 5.1 General.....  | 15 |
| 5.2 Type of documents needed for registration under the scope of this standard .....                | 16 |
| ANNEX A – Regulated products in the scope of this standard .....                                    | 18 |
| A.1 - Lamps and control gears .....   | 18 |
| A.2 - Luminaires .....  | 18 |
| ANNEX B – Exemptions .....  | 19 |
| B.1 – Products exempted, except from hazardous substances requirements .....                        | 19 |
| B.1.1 - Lamps exempted for special end-use purpose .....  | 19 |
| B.1.2 - lighting products exempted as used for non-primary lighting purpose/applications .....      | 19 |
| B.1.3 – Products exempted for technical reasons .....   | 20 |
| B.2 - lighting products accepted with limited labelling requirements .....                          | 20 |
| B.3 - Products exempted from provision of section 4.5 of this Standard.....                         | 20 |
| ANNEX C – Energy efficiency requirements for non-directional lamps .....                            | 21 |
| C.1 - Calculation of energy efficiency index for non-directional lamps.....                         | 21 |
| C.2 - Maximum allowable Energy Efficiency index for non-directional lamps .....                     | 22 |
| C.3 - Energy efficiency classes for non-directional lamps.....                                      | 23 |
| C.4 - Annual energy consumption .....   | 23 |
| ANNEX D – Functionality and endurance requirements for non-directional lamps and luminaires         | 24 |
| D.1 - Functionality and endurance requirements for non-directional fluorescent lamps.....           | 24 |
| D.2 - Functionality and endurance requirements for metal halide lamps and High-pressure sodium..... | 26 |
| D.3 - Functionality and endurance requirements for non-directional LED lamps and luminaires         | 27 |

|   |    |
|---|----|
| ANNEX E – Energy efficiency requirements for directional lamps.....   | 28 |
| E.1 - Calculation of the energy efficiency index for directional lamps .....  | 28 |
| E.2 - Maximum allowable EEI for directional lamps .....   | 29 |
| E.3 - Energy efficiency classes .....   | 29 |
| E.4 - Annual energy consumption .....   | 29 |
| ANNEX F – Functionality requirements for directional lamps and integrated luminaires.....   | 30 |
| ANNEX G – Marking requirements for non-directional and directional lamps .....  | 31 |
| G.1 - Information to be displayed on the lamp itself .....  | 31 |
| G.2 - Information to be visibly displayed to end-users, prior to their purchase, on the packaging<br>and on free access websites .....                            | 31 |
| ANNEX H – Requirement on ballast for fluorescent lamps without integrated ballast and<br>ballast/driver for high intensity discharge, halogen and LED lamps ..... | 33 |
| H.1 - Ballast energy performance requirements.....  | 33 |
| H1.1 - Ballast for all types of lamps .....   | 33 |
| H1.2 - Additional requirement for control gear for halogen and LED lamps .....  | 33 |
| H1.3 - Additional requirement for ballasts for high intensity discharge lamps .....   | 33 |
| H1.4 - Additional requirement for ballasts for fluorescent lamps .....  | 33 |
| H.2 - Product information requirements on ballasts .....  | 38 |
| ANNEX I – Energy label for lamps and integrated luminaires .....  | 39 |
| I.1 - Determining the energy efficiency class.....  | 39 |
| I.2 - Design and placement of the label.....  | 39 |
| I.3 - Information and values contained on the label.....  | 39 |
| ANNEX J – Hazardous chemicals: Substance restrictions for lamps & control gears .....   | 43 |
| ANNEX K – Tests methods for lamps and control gears .....   | 45 |
| ANNEX L – Measurement of the mercury content for fluorescent lamps .....  | 50 |
| L.1 – Default method for measurement.....   | 50 |
| L.2 - Alternative method for measurement of the mercury content .....   | 50 |
| ANNEX M – Energy efficiency for (integrated) luminaires .....   | 51 |
| M.1 - Types of luminaires .....   | 51 |
| M.2 - Minimum Efficacy for luminaires .....   | 51 |
| M.3 - Energy Efficiency Index for luminaires (EEI).....   | 52 |
| M.4 - Classification of Energy Efficiency Index for (integrated) luminaires (EEI) .....   | 52 |
| ANNEX N – Criteria for market surveillance .....  | 54 |
| ANNEX O – Registration form .....   | 56 |

## Table of tables

|   |    |
|---|----|
| Table 1: List of products covered.....  | 6  |
| Table 2: Type of documents required .....   | 16 |
| Table 3: Correction factors for calculation of $P_{cor}$ .....  | 21 |
| Table 4: Correction of the rated Luminous flux values for fluorescent lamps with high color temperature and/or high color rendering and/or second lamp envelope ..... | 22 |
| Table 5: Maximum Energy Efficiency Index (EEI).....   | 22 |
| Table 6: Energy efficiency classes for non-directional lamps .....  | 23 |
| Table 7: Lamp lumen maintenance: factors for single and double-capped fluorescent lamps .....   | 24 |
| Table 8: Lamp lumen maintenance - Deduction percentages for fluorescent lamp lumen maintenance requirements .....   | 25 |
| Table 9: Lamp survival factors for single and double-capped fluorescent lamps.....  | 25 |
| Table 10: Functionality and endurance requirements for non-directional compact fluorescent lamps operated on external control gear (CFLni).....                       | 26 |
| Table 11: Functionality and endurance requirements for High-pressure sodium lamps.....  | 26 |
| Table 12: Functionality and endurance requirements for metal halide lamps.....  | 27 |
| Table 13: Functionality and endurance requirements for non-directional LED lamps and luminaires .....   | 27 |
| Table 14: Power correction if the model requires external control gear.....   | 28 |
| Table 15: Definition of useful luminous flux .....  | 28 |
| Table 16: Maximum energy efficiency index (EEI).....  | 29 |
| Table 17: Energy efficiency classes for directional lamps .....   | 29 |
| Table 18: Functionality and endurance requirements for directional LED lamps and integrated luminaires.....   | 30 |
| Table 19: Minimum efficiency for ballasts for high intensity discharge lamps.....   | 33 |
| Table 20: Energy efficiency index requirements for non-dimmable ballasts for fluorescent lamps. 34  |    |
| Table 21: Energy efficiency index requirements for non-dimmable ballasts for fluorescent lamps not included in Table 20.....  | 38 |
| Table 22: Energy efficiency index requirements for dimmable ballasts for fluorescent lamps.....   | 38 |
| Table 23: Energy efficiency class representation .....  | 39 |
| Table 24: Maximum content limits of hazardous substances .....  | 43 |
| Table 25: Lamps exempted from limits listed in Table 24.....  | 43 |
| Table 26: Maximum mercury content.....  | 44 |
| Table 27: Standards applicable to all lamps covered by part 2 .....   | 45 |
| Table 28: Standards applicable to fluorescent lamps .....   | 46 |
| Table 29: Standards applicable to high-pressure mercury vapour lamps .....  | 47 |
| Table 30: Standards applicable to high-pressure vapour lamps.....   | 47 |
| Table 31: Standards applicable to metal halide lamps .....  | 48 |
| Table 32: Standards applicable to ballasts .....  | 48 |
| Table 33: Standards applicable to Luminaires and LED lamps not listed in SASO 2870 .....  | 49 |
| Table 34: Use types for luminaires (informative) .....  | 51 |
| Table 35: Minimum energy efficacy for (MEPS) Luminaires.....  | 51 |
| Table 36: Correction factors applicable to Power of the Luminaires.....   | 52 |
| Table 37: Energy efficiency classes for luminaires .....  | 53 |
| Table 38: Criteria applying for market surveillance.....  | 54 |

## 1. Scope

This Standard covers products listed in Annex A and B. The types of products summarized in the table below are now covered:

**Table 1: List of products covered**

| Regulatory parameters       | CFLni | LFL and other Fluorescent | LED <sup>(1)</sup> | High Intensity Discharge (HID) | Control gear | Luminaires |
|-----------------------------|-------|---------------------------|--------------------|--------------------------------|--------------|------------|
| Energy Efficiency           | ✓     | ✓*                        | ✓                  | ✓                              | ✓            | ✓          |
| Functionality               | ✓     | ✓*                        | ✓                  | ✓**                            | X            | ✓**        |
| Marking information         | ✓     | ✓*                        | ✓                  | ✓                              | ✓            | ✓          |
| Energy efficiency labelling | ✓     | ✓                         | ✓                  | ✓                              | X            | ✓          |
| Hazardous substances        | ✓     | ✓                         | ✓                  | ✓                              | X            | X          |

<sup>(1)</sup> LED lamps not covered by SASO 2870

\* Applicable to non-directional lamps only

\*\* Information is required based on self-declaration

✓ Included in this Standard

X Excluded from this Standard

Incandescent, halogen and compact fluorescent lamps above 12,000 Lumens not covered in SASO 2870 are included in this standard.

Annex B lists the conditions for exclusion/exemption from this standard.

For luminaires, scope of this Standard is limited to integrated luminaires.

All products within this standard including the exempted/excluded ones shall be registered according to Clause 5.

## 2. Reference Standards

The following list of reference standards applies:

### 2.1 Safety and Electromagnetic Compatibility standards

- IEC 60061-1 Specification for lamp caps and holders together with gauges for the control of interchangeability and safety – lamp caps
- IEC 61000-3-2 Electromagnetic compatibility (EMC) – Part 3-2 Limits – Limits for harmonic current emissions (equipment current  $\leq 16\text{A}$  per phase)
- IEC 61195 Double-capped fluorescent lamps - Safety specifications
- IEC 61199 Single-capped fluorescent lamps - Safety specifications
- IEC 61347-1 Lamp control gear – Part 1: General and safety requirements
- IEC 61347-2
- IEC 62035 Discharge lamps (excluding fluorescent lamps) - Safety specifications
- IEC 62776 Double-capped LED lamps designed to retrofit linear fluorescent lamps - Safety specifications

### 2.2 Functional and energy performance standards

- SASO 2870 Part I - Energy efficiency, functionality and labelling requirement for lighting products
- IEC 60081 Double-capped fluorescent lamps - Performance specifications
- IEC 60662 High-pressure sodium vapour lamps - Performance specifications
- IEC 60901 Single capped fluorescent lamps – Performance standard
- IEC 60921 Ballasts for tubular fluorescent lamps – Performance requirements
- IEC 61231 International Lamp Coding System (ILCOS)
- IEC 61167 Metal halide lamps - Performance specifications
- IEC 62321-4 Determination of certain substances in electrotechnical products – Part 4: Mercury in polymers, metals and electronics
- IEC 60442-1 Part 1 – Control gear for fluorescent lamps – Method of measurement to determine the total input power of control gear circuits and the efficiency of the control gear
- IEC 62554 Sample preparation for measurement of mercury level in fluorescent lamps
- IEC 62717 LED modules for general lighting – Performance requirements
- IEC 62722-1 Luminaire performance – General requirements
- IEC 62722-2-1 Luminaire performance – Particular requirements for LED luminaires
- IEC 60188 High-pressure mercury vapour lamps - Performance specifications
- EN 50294 Measurement method of total input power of ballast-lamp circuits
- IES LM-9 Electric and photometric measurements of fluorescent lamps
- IES LM-10 Approved Method for Photometric Testing of Outdoor Fluorescent Luminaires
- IES LM-41 Hardware Monitor with Thermal Diode Inputs and Bus
- IES LM-66 Electrical and photometric measurements of Single-ended compact fluorescent lamps
- IES LM-79 Electrical and photometric measurements of Solid State lighting products
- IES LM-80 Measurement lumen maintenance of LED Light sources
- IES LM-82 Method for characterisation of LED light Engines and Integrated LED lamps for Electrical properties as a function of the temperature
- IES TM21 Projecting long term lumen maintenance of LED sources
- IES TM28 Projecting long term luminous flux maintenance of LED sources and luminaires
- ANSI C78.377 Electric Lamps — Specifications for the Chromaticity of Solid-state Lighting Products

Notes:

- Methods and reports edited by the CIE (International Commission for Illumination) are not listed, but referenced within the IEC (International Electrotechnical Committee) standards listed above and in Annex K.
- IES standards can be used as equivalent to the IEC standards covering the same scope.

### 3. Terms and definitions

For the purpose of this document, the following terms and definitions shall apply.

#### 3.1 General

**End-user:** Average person buying or expected to buy a lamp or a luminaire for purposes that are outside his trade, business, craft or profession.

**General Lighting:** The full or partial illumination of an area, by replacing or complementing natural light with artificial light in order to enhance visibility in that area.

**Homogeneous materials:** Means one material of uniform composition throughout, or a material consisting of a combination of materials that cannot be disjointed or separated into different materials by mechanical actions such as unscrewing, cutting, crushing, grinding and abrasive processes.

**Manufacturer:** Means the natural or legal person who manufactures products covered by this Standard and is responsible for their conformity with this Standard in view of their being placed on the market and/or put into service under the manufacturer's own name or trademark or for the manufacturer's own use. In the absence of a manufacturer as defined in the first sentence of this point or of an importer, any natural or legal person who places on the market and/or puts into service products covered by this Standard shall be considered a manufacturer.

**Point of sale:** Physical location where the product is displayed or offered for sale to the end-user.

**Product:** An equipment, system or part of a system, which is included in the list of regulated products under this Standard.

**Registration system:** SASO Saudi Label & Standard web application used by manufacturers and importers to register products in the Saudi market.

**Shall:** Where "shall" or "shall not" is used for a provision, that provision is mandatory if compliance with the standard is claimed

**Should:** "Should" is used to indicate provisions which are desirable as good practice, but which are not mandatory

**Standard:** Refers directly to this Standard - "ENERGY EFFICIENCY, FUNCTIONALITY AND LABELLING REQUIREMENTS FOR LIGHTING PRODUCTS PART 2".

#### 3.2 Technical

**Ballast:** Means lamp control gear inserted between the supply and one or more discharge lamps which by means of inductance, capacitance or a combination of inductance and capacitance, serves mainly to limit the current of the lamp(s) to the required value.

**Beam angle:** Means the angle between two imaginary lines in a plane through the optical beam axis, such that these lines pass through the center of the front face of the lamp and through points



at which the luminous intensity is 50% of the center beam intensity, where the center beam intensity is the value of luminous intensity measured on the optical beam axis.

**Category of luminaire:** Luminaires which fall into the same criteria for energy efficiency and functional requirements.

**Chromaticity:** Means the property of a color stimulus defined by its chromaticity coordinates, or by its dominant or complementary wavelength and purity taken together.

**Clear lamp:** Lamp (excluding compact fluorescent lamps) with a luminance above 25,000 cd/m<sup>2</sup> for lamps having a luminous flux below 2,000 lm and above 100,000 cd/m<sup>2</sup> for lamps having more luminous flux, equipped with only transparent envelopes in which the light producing filament, LED or discharge tube is clearly visible.

**Color consistency:** Means the maximum deviation of chromaticity coordinates (x and y) of a single lamp from a chromaticity center point (cx and cy), expressed as the size (in steps) of the MacAdam ellipse formed around the chromaticity center point (cx and cy). MacAdam ellipses refer to the regions (in the form of an ellipse) on a chromaticity diagram which contain all colors that are indistinguishable to the average human eye from the color at the center of the ellipse.

**Color rendering (CRI / Ra):** Means the effect of an illuminant on the color appearance of objects by conscious or subconscious comparison with their color appearance under a reference illuminant.

**Compact fluorescent lamp (CFL):** means a unit which cannot be dismantled without being permanently damaged, provided with a lamp cap and incorporating a fluorescent lamp and any additional components necessary for starting and stable operation of the lamp

**Compact fluorescent lamp without integrated ballast (CFLni):** Means a single capped fluorescent lamp that does not include all components necessary for starting and stable operation of the lamp (operated on external ballast).

**Components and sub-assemblies:** Means parts intended to be incorporated into products which are not placed on the market and/or put into service as individual parts for end- users or the environmental performance of which cannot be assessed independently.

**Control device:** Means an electronic or mechanical device controlling or monitoring the luminous flux of the lamp by other means than power conversion for the lamp, such as timer switches, occupancy sensors and daylight standard devices. In addition, phase cut dimmers shall also be considered as control devices.

**Control gear:** Means a device located between the electrical supply and one or more lamps, which provides a functionality related to the operation of the lamp(s), such as transforming the supply voltage, limiting the current of the lamp(s) to the required value, providing starting voltage and preheating current, preventing cold starting, correcting the displacement factor or reducing radio interference. The device may be designed to connect to other lamp control gear to perform these functions. The term does not include control devices or power supplies.

**Correction factor:** Any mathematical adjustment made to a calculation to account for deviations in either the sample or the method of measurement. Specifically for this Standard, the correction is needed to be able to apply one formula for different lamp types.

**Correlated color temperature (CCT / Tc [K]):** a specification of the color appearance of the light emitted by a lamp, relating its color to the color of light from a reference source when heated to a particular temperature, measured in degrees Kelvin (K). More specifically, it is the absolute temperature of a blackbody whose chromaticity most nearly resembles that of the light source. A black body is an idealized physical body that absorbs all incident electromagnetic radiation, regardless of frequency or angle of incidence.

**Directional (direct) Lamp or Luminaire:** a lamp or a luminaire having at least 80% light output within a solid angle of  $\pi Sr$  corresponding to a cone with an angle of  $120^\circ$ .

**Displacement factor (Df):** expressed by  $\cos \varphi_1$ , where  $\varphi_1$  is the phase angle between the fundamental of the main supply voltage and the fundamental of the main current (to be checked).

**Discharge lamp:** means a lamp in which the light is produced, directly or indirectly, by an electric discharge through a gas, a metal vapor or a mixture of several gases and vapors.

**Downlight luminaire:** category of LED luminaire that direct the light downward and can be recessed, surface mounted or suspended.

Note: See definition of directional lamp for correspondence, but do not include linear fluorescent troffers or linear luminaire forms such as linear fluorescent pendants, typically used to illuminate office spaces.

**Efficiency Base based (EBb<sub>FL</sub>):** means the relationship between the rated lamp power ( $P_{lamp}$ ) and the ballast efficiency. For ballasts for single and double-capped fluorescent lamps, the EBb<sub>FL</sub> is calculated as follows:

- When  $P_{lamp} \leq 5 \text{ W}$  :  $EBb_{FL} = 0.71$
- When  $5 \text{ W} < P_{lamp} < 100 \text{ W}$  :  $EBb_{FL} = \frac{P_{lamp}}{\left(1 + \frac{38}{36}P_{lamp} + 2\sqrt{\frac{P_{lamp}}{36}}\right)}$
- When  $P_{lamp} \geq 100 \text{ W}$  :  $EBb_{FL} = 0.91$

**External lamp control gear:** means non-integrated lamp control gear designed to be installed outside the enclosure of a lamp or luminaire, or to be removed from the enclosure without permanently damaging the lamp or the luminaire

**Family of product (or Model Group):** group of light sources or luminaires that have the same characteristics, distinguished by common features of materials, components and/or method of processing.

**Fluorescent lamp:** means a discharge lamp of the low pressure mercury type in which most of the light is emitted by one or several layers of phosphors excited by the ultraviolet radiation from the discharge. Fluorescent lamps are supplied either with or without integrated ballasts

**Fluorescent lamps without integrated ballast:** means single and double capped fluorescent lamps without integrated ballast

**High intensity discharge lamp (HID):** means an electric discharge lamp in which the light producing arc is stabilized by wall temperature and the arc has a bulb wall loading in excess of 3 watts per square centimeter

**Initial luminous flux:** means the luminous flux of a lamp after a short operating period according to applicable standard

**Integrated luminaire:** means a complete unit consisting of non-replaceable light emitting elements and a matched driver together with part to distribute light, to position and protect the light emitting elements and to connect directly the unit to a branch circuit. Integrated luminaire might be provided with or without control gear.

**Lamp:** means a unit whose performance can be assessed independently and which consists of one or more light sources. It may include additional components necessary for starting, power supply or stable operation of the unit or for distributing, filtering or transforming the optical radiation, in cases where those components cannot be removed without permanently damaging the unit

**Lamp cap:** means that part of a lamp which provides connection to the electrical supply by means of a lamp holder or lamp connector and may also serve to retain the lamp in the lamp holder

**Lamp holder or 'socket':** means a device which holds the lamp in position, usually by having the cap inserted in it, in which case it also provides the means of connecting the lamp to the electric supply

**Lamp lifetime:** For LED lamps, lamp lifetime means the operating time between the start of their use and the moment when only 50% of the total number of lamps survive or when the average lumen maintenance of the batch falls below 70%, whichever occurs first. For all other lamps, lamp lifetime means the period of operating time after which the fraction of the total number of lamps which continues to operate corresponds to the lamp survival factor of the lamp under defined conditions and switching frequency

**Lamp lumen maintenance factor (LLMF):** means the ratio of the luminous flux emitted by the lamp at a given time in its life to the initial luminous flux

**Lamp mercury content:** means the mercury contained in the lamp (weight usually specified in mg)

**Lamp start time:** means the time needed, after the supply voltage is switched on, for the lamp to start fully and remain alight

**Lamp survival factor (LSF):** means the defined fraction of the total number of lamps that continue to operate at a given time under defined conditions and switching frequency

**Lamp warm-up time:** means the time needed after start-up for the lamp to emit a defined proportion of its stabilized luminous flux

**LED Light-emitting diode:** means a light source which consists of a solid state device embodying a P-N junction. The junction emits optical radiation when excited by an electric current

**LED lamp:** means a lamp incorporating one or more LED modules. The lamp may be equipped with a cap.

**LED module:** means an assembly having no cap and incorporating one or more LED packages on a printed circuit board. The assembly may have electrical, optical, mechanical and thermal components, interfaces and control gear.

**LED package:** means an assembly having one or more LED(s). The assembly may include an optical element and thermal, mechanical and electrical interfaces.

**Lighting:** means the application of light to a scene, objects or their surroundings so that they may be seen by humans.

**Light source:** means a surface or object designed to emit mainly visible optical radiation produced by a transformation of energy. The term 'visible' refers to a wavelength of 380-780 nm.

**Luminaire:** means an apparatus which distributes, filters or transforms the light transmitted from one or more lamps and which includes all the parts necessary for supporting, fixing and protecting the lamps and, where necessary, circuit auxiliaries together with the means for connecting them to the electric supply.

**Accent luminaire (lighting)** a directional luminaire employed to emphasize a particular object of surface feature, or draw attention to a part of the field of view. This includes line-voltage directional track lighting.

**Color Tunable Lamp/Luminaire:** For the purpose of this specification, a color tunable luminaire has functionality that allows the end user to alter the color appearance of the light generated by the luminaire. This tuning must include white light that is capable of meeting the specification's color requirements, and can alter the color appearance along the black body curve, or may also extend to colors beyond the defined correlated color temperature ranges

(e.g. 2,700K and 5,000K) outside of the seven step MacAdam ellipse or the ANSI quadrangles.

**Cove Mount (Luminaire):** Lighting comprising light sources shielded by a ledge or horizontal recess, and distributing light over the ceiling and upper wall. For purposes of this specification, cove mount luminaires feature luminaire optics over the lamps, LED packages, arrays or modules, LED light engines or integrated LED lamps.

**Decorative Luminaire:** luminaire employing non-white light sources

Note 1: decorative luminaires are not intended to accent an object or an area with a space.

Note 2: decorative luminaires typically employ blown glass, or colorful glass elements

**Decorative Pendant (Luminaire):** Suspended luminaires that are not intended to accent an object or an area within a space

**Downlight Luminaire:** category of LED directional luminaire that direct the light downward and can be recessed, surface mounted or suspended.

Note: See definition of directional lamp for correspondence, but do not include linear fluorescent troffers or linear luminaire forms such as linear fluorescent pendants, typically used to illuminate office spaces.

**Enclosed fixture or enclosed luminaire:** contains enclosed lamp compartment(s) where ventilation openings are less than 3 square inches per lamp in the lamp compartment or where the cross-sectional area of the opening of the lamp compartment is less than the than the maximum cross sectional area of the lamp compartment

**Flood luminaire (or lamp):** luminaire (or lamp) designed to project or diffuse a comparatively uniform level of illumination over a large space area

**Floor Lamp (Luminaire):** a portable luminaire on a high stand suitable for standing on the floor with those same objects when illuminated by a reference source of comparable color temperature

**Non replaceable light source:** light source which is a non-replaceable part of the luminaire either because it cannot be replaced without breaking or destroying the luminaire or because it is enclosed under a cover fixed by screw or similar fixing means designed to be used only once and which is not possible to be opened.

**Outdoor Post-Mounted Luminaire:** outdoor luminaire supported by a post inserted into the ground and mounted between 4 feet and 10.5 feet above grade.

**Outdoor Security Luminaire:** Wall mounted luminaires intended to light areas immediately adjacent to a building's perimeter

**Portable Desk Task Light (Luminaire):** light fixture resting on a desk that directs light to a specific surface or area to provide illumination for visual tasks such as reading and writing, and employs a plug for its electrical connection.

**Portable Floor Task Light (Luminaire):** light fixture resting on the floor that directs light to a specific surface or area to provide illumination for visual tasks such as reading and writing and provided with plug connection.

**Portable Luminaire:** lighting unit that is not permanently fixed in place.

**Residential Luminaire:** luminaire marketed and intended to be used in a residential environment notwithstanding use in commercial, business and industrial environments.

**Spot Color Shifting Dimming Luminaire:** A luminaire with dimming capability designed to simulate the behavior of incandescent lamps where the chromaticity gradually shifts to a lower value as the product is dimmed. This function is not considered color tunable for the purposes of this specification, unless it can also be tuned to different colors at full output

**Torchiere luminaire:** an indirect floor luminaire that send all or nearly all of its light upward

**Under-cabinet luminaire:** luminaire installed below an upper cabinet to direct light down to the work surface of a countertop or desk for task lighting

**Wall sconce (mounted) luminaire:** wall mounted luminaire not intended to accent an object or a task area within a space

**Wrap lens luminaire:** surface mounted luminaire with an elongated aspect ratio and a single optic covering the light source that direct less than 90% of light downward

**Luminous flux ( $\Phi$ ):** means the quantity derived from radiant flux (radiant power) by evaluating the radiation in accordance with the spectral sensitivity of the human eye. Without further specification it refers to the initial luminous flux. Radiant flux is the measure of the total power of electromagnetic radiation (including infrared, ultraviolet, and visible light).

**Luminous intensity (candela or cd):** means the quotient of the luminous flux leaving the source and propagated in the element of solid angle containing the given direction, by the element of solid angle.

**Materials:** means all materials used during the life cycle of a product.

**Nominal value:** means the value of a quantity used to designate and identify a product.

**Non clear lamp:** is a lamp that does not comply with the specifications of the definition of “Clear lamp”, including compact fluorescent lamps

**Non-directional (indirect) lamp or luminaire:** means a lamp or a luminaire that is not a directional lamp or luminaire.

**Power factor:** means the ratio of the absolute value of the real power (also known as active power) to the apparent power under periodic conditions.

**Premature failure:** means when a lamp reaches the end of its life after a period in operation which is less than the rated life time stated in the technical documentation.

**Rated value:** means the value of a quantity used for specification purposes, established for a specified set of operating conditions of a product. Unless stated otherwise, all requirements are set in rated values.

**Retrofit lamp:** means a lamp which can replace another lamp with similar performances and different technology using the same cap

**Second lamp envelope:** second outer lamp envelope which is not required for the production of light, such as an external sleeve for preventing mercury and glass release into the environment in case of lamp breakage, for protecting from ultraviolet radiation or for serving as a light diffuser.

**Self-ballasted lamp:** a unit which cannot be dismantled without being permanently damaged, provided with a lamp cap and incorporating a light source and any additional elements necessary for starting and stable operation of the light source i.e. CFL with integrated ballast (CFLi) or LED retrofit lamp with integrated control gear.

**Special purpose lamps:** are lamps designed essentially for other types of applications (such as traffic signals, terrarium lighting, or household appliances) and clearly indicated as such on accompanying product information shall not be subject to the requirements outlined in this Standard.

**Switching cycle:** means the sequence of switching the lamp on and off at set intervals.

**Useful luminous flux ( $\phi_{use}$ ):** means the part of the luminous flux of a lamp falling within the beam angle used for calculating the lamp's energy efficiency.

**Ultra Violet (UV):** means a light source with emission in the non-visible spectrum and characterized with a wave length between 10 and 400 nm. Wave lengths between 315 and 400 nm are defined as Ultra Violet A (UVA) and wave lengths between 280 and 315 nm are defined as Ultra Violet B (UVB).

**Warm-start:** feature that is performed to reset a previously running system after an unintentional shutdown or limited interruption of the lighting emission.

**White light source:** means a light source having chromaticity coordinates that satisfy the following requirement:

- $0.270 < x < 0.530$
- $-2.3172 x^2 + 2.3653 x - 0.2199 < y < -2.3172 x^2 + 2.3653 x - 0.1595$

## 4. Requirements for non-directional/directional lamps, control gears and luminaires

### 4.1 Energy efficiency requirements

Lamps listed in Annex A of this Standard shall comply with the energy efficiency requirements specified in Annex C for non-directional lamps and Annex E for directional lamps.

For Incandescent, Halogen, and CFLi with luminous flux above or equal to 12,000 lumens the tests and criteria described in SASO 2870 apply.

For LED lamps, tests and criteria described in SASO 2870 apply.

Energy efficiency classes and the methods of calculating the EEI for lamps are also detailed in Annex C for non-directional lamps and Annex E for directional lamps.

Ballasts and control gears shall comply with the Energy Efficiency Requirements specified in Annex H.

Luminaires in the scope of this standard (integrated luminaires) shall comply with energy efficiency requirements expressed in Annex M of this standard.

### 4.2 Functionality requirements

Lamps listed in Annex A of this Standard shall comply with the functionality requirements specified in Annex D (non-directional lamps) and Annex F (directional lamps).

For Incandescent, Halogen, and CFLi with luminous flux above or equal to 12,000 lumens the tests and criteria described in SASO 2870 apply.

For LED lamps, tests and criteria described in SASO 2870 apply.

Integrated luminaires listed in Annex A shall comply with requirements specified in Annex D, F and M, when applicable.

### 4.3 Marking requirements

Instruction manuals supplied with products and available on website shall be:

- Cautionary and/or any safety warnings for the direct user or consumer shall be in the Arabic and English language. The use of international accepted pictograms is permitted instead of verbally expressed language.
- And available on a Website (English only is permitted).

Lamps, ballasts and luminaires listed in Annex A of this Standard shall comply with the marking requirements specified in Annex G (directional lamps, non-directional lamps and luminaires) and Annex H.2 (ballasts / control gears).

“Special purpose” products (Annex B.1) do not need to comply with the marking requirements specified in Annex G. Instead, the following information shall be clearly and prominently indicated on their packaging and in all forms of product information accompanying the lamp when it is placed on the market:

- Their intended purpose
- That they are not suitable for household/commercial illumination

Products listed in Annex B.1.2 shall fulfill the documentation and information requirements specified for them in the same Annex.

### 4.4 Energy efficiency label

Lamps and integrated luminaires in the scope of this standard shall have a label printed directly on the individual packaging of the product.

Products listed in Annex B.1 and ballasts/control gears are excluded from the energy labelling requirements.

Products listed in Annex B.2 shall have a label printed or put as a sticker directly on the individual packaging of the product.

### 4.5 Hazardous chemicals: Substance restrictions for lamps and control gears

Products specified in Annex A and Annex B.1 and B.2 shall comply with the maximum hazardous substances limits according to Annex J.

## 5. Registration requirements

### 5.1 General

Product registration is mandatory, whereby information about registration requirements will be available in the information center of the Saudi Standards, Metrology, and Quality Organization (SASO), and reference shall be made to the separate SASO registration forms and requirements.

The product's information shall be submitted through the registration system electronically via SASO website. The applicant should fulfill all updated requirements of the electronic registration system and any new requirements, procedures, and regulations required by SASO. A draft of the registration form is provided in Annex O (the final version is the one present on the SASO website).

Labels will be automatically published by SASO website after the final registration of a product.

## 5.2 Type of documents needed for registration under the scope of this standard

To confirm the claims of the applicant, the following types of documents are required (see Table 2). Test report or evidence of the claimed properties can be established for a family of products, the definition of which is under the responsibility of the manufacturer.

The definition of the family of product (lamp or luminaire) shall include the minimum performances that apply to all products included in the family (but not limited to):

- Efficacy (lumen/watt),
- Lumen maintenance,
- Lifetime,
- Color rendering Index (Ra),
- Luminous flux (lumen),
- Same country of origin

All products within a family of products are declared with the same Energy Efficiency class (based on rated values).

Products within a family shall not exceed:

- by more than 10% the minimum declared values for Lifetime
- by more than 25% the minimum declared value for Luminous flux (lumen).

Evidences attached to the registration shall comply with the above definition of the family the product belongs to.

For luminaires, the functionality and endurance requirements can be supported by a factory test report. This factory test report shall reference the testing methodology/procedure used to measure the minimum performances required.

NOTE: these documents are not exclusive from other documents required by SASO (e.g. Electro Magnetic Compatibility, safety, ...) for registration.

NOTE: If a model within the registered family of product fails, the registration of all models under the same family of product will be automatically canceled.

**Table 2: Type of documents required**

| Type of test   | Type of document  |
|--|---|
| Energy Efficiency  | <ul style="list-style-type: none"> <li>• For lamps: test report for each model</li> <li>• For luminaires: factory test report for a representative model of the family, including a family specification overview</li> <li>• For control gear: test report</li> </ul>                             |
| Functionality (Ra, color temperature, and other aspects)               | <ul style="list-style-type: none"> <li>• For lamps: test report for a representative model of the family, including a family specification overview</li> <li>• For luminaires: factory test report for a representative model of the family, including a family specification overview</li> </ul> |
| Endurance (Lamps survival factor, lumen maintenance, switching On/off) | <ul style="list-style-type: none"> <li>• For lamps: test report for a representative model of the family, including a family specification overview</li> </ul>  |



|                                    |  |
|------------------------------------|--|
|                                    | <ul style="list-style-type: none"><li>• For luminaires: factory report for a representative model of the family, including a family specification overview</li></ul> |
| Environment (Hazardous substances) | Test report or self-declaration for a representative model of the family, including a family specification overview  |

## **ANNEX A – Regulated products in the scope of this standard**

### **A.1 - Lamps and control gears**

This Standard establishes requirements for the placing on the market of the below listed lamp types, and of control gears (ballasts) able to operate such lamps, even when they are integrated into other energy-using products

This Standard is applicable to lamps and luminaires with a luminous flux above 60 lumens.

- Incandescent lamps with a luminous flux above or equal 12,000 lumens
- Halogen lamps with a luminous flux above or equal 12,000 lumens
- Compact fluorescent lamps with integrated ballast (CLFi) with a luminous flux above or equal 12,000 Lumens
- Compact fluorescent lamps without integrated ballast (CFLni)
- Fluorescent Lamps (all types)
- High Intensity Discharge Lamps, such as:
  - Mercury Vapour Lamps
  - High/ Low Pressure Sodium Lamps
  - Quartz Metal Halide Lamps
  - Ceramic Metal Halide Lamps
- LED Lamps (including 'retrofit LED lamps' with a luminous flux above or equal 12,000 Lumens)

### **A.2 - Luminaires**

This standard establishes requirement for the placing on the market of the below list of with integrated luminaires (provided with non-replaceable lamps) which are designated under the following categories:

- directional integrated luminaires
- non-directional integrated luminaires

## ANNEX B – Exemptions

The following list the exclusions and exemptions of this standard for products within the scope of this standards except for LED lamps which exemptions are covered by SASO 2870.

### B.1 – Products exempted, except from hazardous substances requirements

The following products shall be exempt from the provisions of Section 4.1 to 4.4 of this standard, provided that in all forms of product information it is stated that they are not intended for general lighting use within the meaning of this Regulation, or that they are intended for use in applications listed below:

#### B.1.1 - Lamps exempted for special end-use purpose

- Traffic/signal lamps, such as:
  - Signal lamps
  - Aviation/Aircraft lighting for runways and planes, all exterior applications
  - Train lighting, including signal lighting
  - Water craft lighting, including signal lighting
  - Automotive lighting/lamps
- Heating lamps (infrared), such as:
  - Infrared heat lamps – comfort heating (outdoor and indoor)
  - Infrared heat lamps – industrial
  - Infrared heat lamps – animal rearing
  - Infrared heat lamps – health care
- Luminaires not connected to the mains, such as:
  - Luminaires powered with solar cells (for outdoor illumination, ...)

#### B.1.2 - lighting products exempted as used for non-primary lighting purpose/applications

- Products intended for use in applications other than general lighting and products incorporated into products which do not provide a general lighting function, e.g.:
  - Emission of light as an agent in chemical or biological processes (such as polymerization, photodynamic therapy, horticulture, pet care, anti-insect products)
  - Image capture and image projection (such as camera flashlights, photocopiers, video projectors)
  - Lamps for swimming pools
  - Pet care (aquarium, terrarium, etc.)
  - Anti-insect lamps
  - Disinfection
  - Tanning
  - Display optic lamps (> 12,000 lumens), such as:
    - Stage and studio lamps
    - Theatre lamps
    - Television (TV) lamps
    - Studio lamps
    - Photo lamps – Flashlights or lamps for the development of pictures
    - Projection lamps
    - Traffic/signal lamps
- Lamps intended for use in potentially explosive atmospheres;
- Emergency lighting luminaires and emergency sign luminaires;
- Control gears (ballasts) intended for use in luminaires defined in paragraph (c) and designed to operate lamps in emergency conditions;

- Luminaires intended for use in potentially explosive atmospheres and medical devices;
- Integrated luminaires for decorative purpose;
- Lamps marketed for operation with batteries only
- Lamps marketed as part of a product whose primary purpose is not lighting. However, if they are offered for sale, hire or hire purchase or displayed separately, for example as spare parts, they shall be included within the scope of this Standard

The intended purpose shall be stated for each product in the product information, and the technical documentation file drawn up for the purposes of conformity assessment shall list the technical parameters that make the product design specific for the stated intended purpose.

These aforementioned lamps are not excluded from this Standard when they are marketed for general lighting purposes.

### **B.1.3 – Products exempted for technical reasons**

The following lamps shall be exempted from the provisions of Sections 4.1 to 4.4 of this standard, provided that the technical documentation file drawn up for the purposes of conformity assessment states which of the technical parameters listed hereunder provide(s) a basis for their exemption:

- blended high intensity discharge lamps having:
  - 6 % or more of total radiation of the range 250-780 nm in the range of 250-400 nm; and
  - 11 % or more of total radiation of the range 250-780 nm in the range of 630-780 nm; and
  - 5 % or more of total radiation of the range 250-780 nm in the range of 640-700 nm;
- blended high intensity discharge lamps having:
  - the peak of the radiation for Ultra Violet A (UVA) and Ultraviolet B (UVB);
- double capped fluorescent lamps having:
  - a diameter of 7 mm (T2) and less;
  - a diameter of 16 mm (T5) and lamp power  $P \leq 13 \text{ W}$  or  $P > 80 \text{ W}$ ;
  - a diameter of 38 mm (T12), lamp cap G-13 Medium BiPin base,  $\pm 5 \text{ m}$  (+magenta, – green) color compensating filter value limit (cc). CIE coordinates  $x=0.330 \ y=0.335$  and  $x=0.415 \ y=0.377$ ;
  - a diameter of 38 mm (T12) and equipped with an external ignition strip.
- single capped fluorescent lamps having a diameter of 16 mm (T5) 2G11 4 pin base,  $T_c = 3,200 \text{ K}$  with chromaticity coordinates  $x=0.415 \ y=0.377$  and  $CCT/T_c = 5,500 \text{ K}$  with chromaticity coordinates  $x=0.330 \ y=0.335$
- high intensity discharge lamps with  $CCT/T_c > 7,000 \text{ K}$
- high intensity discharge lamps having a specific effective UV output  $> 2 \text{ mW/klm}$
- high intensity discharge lamps not having lamp cap E27, E40, PGZ12
- light sources that do not comply with the definition of white light sources

### **B.2 - lighting products accepted with limited labelling requirements**

Lighting products intended to be used in projects (and not to be displayed or sold through point-of-sale) shall have a special label (generated by SASO registration system after obtaining SASO's approval) printed or put as a sticker directly on the individual packaging of the product. All lighting products registered with the special label shall not be displayed and/or sold through point of sale.

### **B.3 - Products exempted from provision of section 4.5 of this Standard**

The following products are exempted from requirements on hazardous substances (Clause 4.5)

- Luminaires
- Control gears

Content of the hazardous substances shall be given as information during the registration process.

## ANNEX C – Energy efficiency requirements for non-directional lamps

### C.1 - Calculation of energy efficiency index for non-directional lamps

For the calculation of the energy efficiency index (EEI) of a model, its corrected (electric) power  $P_{cor}$  for any control gear losses is compared with its reference power  $P_{ref}$  (based on the luminous flux emitted).

The EEI is calculated as follows and rounded to two decimal places:

$$EEI = \frac{P_{cor}}{P_{ref}}$$

$P_{cor}$  is defined as:

For models *without* external control gear,  $P_{cor}$  is the rated power ( $P_{rated}$ ).

For models *with* external control gear  $P_{cor}$  is the rated power ( $P_{rated}$ ) corrected in accordance with the corrections factors listed below:

The rated power  $P_{rated}$  of the lamps/luminaires is measured at their nominal input voltage.

**Table 3: Correction factors for calculation of  $P_{cor}$**

| Lamp parameter  | Corrected Power $P_{cor}$  |
|---|--|
| Discharge lamp with cap GX53  | $P_{rated} \times 0.75$  |
| Non clear lamps with color rendering index (Ra) $\geq 90$ and $P_{ref} \leq (0.5 \times (0.88\sqrt{\Phi_{use}} + 0.049\Phi_{use}))$         | $P_{rated} \times 0.85$  |
| Discharge lamp with color rendering index $\geq 90$ and Color Temperature $\geq 5000$ K   | $P_{rated} \times 0.76$  |
| Non clear lamps with second envelope and $P_{ref} \leq (0.5 \times (0.88\sqrt{\Phi_{use}} + 0.049\Phi_{use}))$                              | $P_{rated} \times 0.95$  |
| LED lamps requiring external power supply   | $P_{rated} \times 1.10$  |
| Clear lamps with second envelope  | $P_{rated} \times 0.90$  |
| Fluorescent lamps of 16mm diameter (T5 lamps) and 4 pin single capped fluorescent lamps operating on external fluorescent lamp control gear | $P_{rated} \times 1.10$  |
| Other lamps operating on external fluorescent lamp control gear   | $P_{rated} \times \frac{0.24\sqrt{\Phi_{use}} + 0.0103 \times \Phi_{use}}{0.15\sqrt{\Phi_{use}} + 0.0097 \times \Phi_{use}}$ |
| Lamps operating on external high-intensity discharge lamp control gear  | $P_{rated} \times 1.10$  |
| Lamps operating on low-pressure vapor lamp control gear   | $P_{rated} \times 1.15$  |
| Lamps with anti-glare shield  | $P_{rated} \times 0.80$  |

Note: the correction factors in Table 3 are cumulative when appropriate and also applicable to the products exempted or excluded (see Annex B)

The following correction factor applies to the rated luminous flux  $\Phi_{use}$

**Table 4: Correction of the rated Luminous flux values for fluorescent lamps with high color temperature and/or high color rendering and/or second lamp envelope**

| Lamp parameter                              | Corrected luminous flux ( $\Phi_{use;cor}$ ) |
|---|--|
| Color Temperature $\geq 5,000$ K            | $\Phi_{use;cor} = \Phi_{use} \times 1.10$    |
| $95 \geq$ Color Rendering Index (Ra) $> 90$ | $\Phi_{use;cor} = \Phi_{use} \times 1.20$    |
| Color Rendering Index (Ra) $> 95$           | $\Phi_{use;cor} = \Phi_{use} \times 1.30$    |
| Second lamp envelope                        | $\Phi_{use;cor} = \Phi_{use} \times 1.10$    |

Note: the correction factors in Table 4 are cumulative when appropriate and also applicable to the products exempted or excluded (see Annex B).

$P_{ref}$  is defined as:

$P_{ref}$  is the reference power obtained from the rated value of the useful luminous flux moderated with factor of Table 4 (when applicable) using of the model ( $\Phi_{use;cor}$ ) by the following formulae:

For models with  $\Phi_{use} < 1300$  lumen:  $P_{ref} = 0.88\sqrt{\Phi_{use;cor}} + 0.049 \times \Phi_{use;cor}$

For models with  $\Phi_{use} \geq 1300$  lumen:  $P_{ref} = 0.07341 \times \Phi_{use;cor}$

For non-directional lamps, the useful luminous flux ( $\Phi_{use;cor}$ ) is the total rated luminous flux ( $\Phi_{use}$ ).

## C.2 - Maximum allowable Energy Efficiency index for non-directional lamps

The maximum allowable EEI for non-directional lamps are outlined in Table 5.

**Table 5: Maximum Energy Efficiency Index (EEI)**

| Lamps types    | Date of enforcement : 6 months after publication in the Official Gazette |                             |      |                                      |
|----------------|--|-----------------------------|------|--------------------------------------|
|                | CFLni  | LFL<br>Other<br>fluorescent | LED  | High Intensity<br>Discharge<br>(HID) |
| Maximum Values | 0.24   | 0.24                        | 0.24 | 0.50                                 |

### C.3 - Energy efficiency classes for non-directional lamps

The energy efficiency rating of lamps shall be determined on the basis of their energy efficiency index (EEI) as outlined in Table 6.

**Table 6: Energy efficiency classes for non-directional lamps**

| Energy efficiency index (EEI) | Energy efficiency class (Arabic) | Equivalent energy efficiency class (English) |
|-------------------------------|----------------------------------|--|
| $EEI \leq 0.11$               | أ                                | A  |
| $0.11 < EEI \leq 0.13$        | ب                                | B  |
| $0.13 < EEI \leq 0.18$        | ج                                | C  |
| $0.18 < EEI \leq 0.24$        | د                                | D  |
| $0.24 < EEI \leq 0.50$        | هـ                               | E  |
| $0.50 < EEI \leq 0.95$        | و                                | F  |
| $0.95 < EEI \leq 1.75$        | ز                                | G  |

*Note: For labelling purposes, the Arabic letters shall be used. The equivalent English version is only provided for informational purposes*

### C.4 - Annual energy consumption

The annual energy consumption  $E_y$  is calculated on a basis of 1,000h of operation according to the following:

$$E_y = P_{cor} \times \frac{D_{op}}{1000} \quad [\text{kWh}]$$

with

|                                     |     |
|-------------------------------------|-----|
| $P_{cor}$ : Corrected power (rated) | [W] |
| $D_{op}$ : Duration of operation    | [h] |
| 1,000: Conversion factor            | [-] |

## ANNEX D – Functionality and endurance requirements for non-directional lamps and luminaires

### D.1 - Functionality and endurance requirements for non-directional fluorescent lamps

Fluorescent lamps without integrated ballast shall have at least the lamp lumen maintenance factors in Table 7:

**Table 7: Lamp lumen maintenance: factors for single and double-capped fluorescent lamps**

| Lamp types   | Operating hours                |        |        |         |
|--|--------------------------------|--------|--------|---------|
|  | 2,000h                         | 4,000h | 8,000h | 16,000h |
| Double-Capped Fluorescent lamps operating on non-high frequency ballasts   | 0.92                           | 0.85   | 0.80   | —       |
| T8 halophosphate fluorescent Double-Capped Fluorescent lamps on high frequency ballast with warm-start   | 0.95                           | 0.90   | 0.87   | 0.80    |
| Tri-Phosphore Double-Capped Fluorescent lamps on non-high frequency ballast  | 0.99                           | 0.97   | 0.92   | 0.90    |
| T8 Tri-Phosphore Double-Capped Fluorescent lamps on high frequency ballast with warm-start   | 0.96                           | 0.92   | 0.91   | 0.90    |
| Circular Single-Capped Fluorescent lamps operating on non-high frequency ballasts, T8 U-shaped double-capped fluorescent lamps and spiral-shaped double capped fluorescent lamps of all diameters equal to or larger than 16 mm (T5) | 0.80                           | 0.74   | —      | —       |
|  | 0.72 at 5,000 operating hours  |        |        |         |
| Circular Single-Capped Fluorescent lamps operating on high frequency ballasts  | 0.85                           | 0.83   | 0.80   | —       |
|  | 0.75 at 12,000 operating hours |        |        |         |
| Other single-capped Fluorescent lamps operating on non-high frequency ballasts   | 0.85                           | 0.78   | 0.75   | —       |
| Other single-capped Fluorescent lamps on high frequency ballast with warm-start  | 0.90                           | 0.84   | 0.81   | 0.78    |
| T12 halophosphate double-capped fluorescent lamps operation on US non-high frequency ballasts  | 0.85                           | 0.77   | 0.66   |         |

The following cumulative deductions shall be applied to the values in Table 7.



**Table 8: Lamp lumen maintenance - Deduction percentages for fluorescent lamp lumen maintenance requirements**

| <b>Lamp parameter</b>                         | <b>Deduction from lamp lumen maintenance requirement</b>                            |
|---|---|
| Lamps with $95 \geq Ra > 90$                  | At operating hours $\leq 8,000$ h: – 5 %<br>At operating hours $> 8,000$ h: – 10 %  |
| Lamps with $Ra > 95$                          | At operating hours $\leq 4,000$ h: – 10 %<br>At operating hours $> 4,000$ h: – 15 % |
| Lamps with a color temperature $\geq 5,000$ K | –10 %   |

Fluorescent lamps without integrated ballast shall have at least the lamp survival factors in Table 9:

**Table 9: Lamp survival factors for single and double-capped fluorescent lamps**

| <b>Lamp types</b>  | <b>Operating hours</b>         |               |               |                |
|--|--------------------------------|---------------|---------------|----------------|
|  | <b>2,000h</b>                  | <b>4,000h</b> | <b>8,000h</b> | <b>16,000h</b> |
| Double-capped Fluorescent lamps operating on non-high frequency ballasts and T8 halophosphate fluorescent  | 0.99                           | 0.97          | 0.90          | —              |
| Double-capped Fluorescent lamps on high frequency ballast with warm-start  | 0.99                           | 0.97          | 0.92          | 0.90           |
| Circular single-capped Fluorescent lamps operating on non-high frequency ballasts, T8 U-shaped double-capped fluorescent lamps and spiral-shaped double capped fluorescent lamps of all diameters equal to or larger than 16 mm (T5) | 0.98                           | 0.77          | —             | —              |
|  | 0.50 at 5,000 operating hours  |               |               |                |
| Circular single-capped Fluorescent lamps operating on high frequency ballasts  | 0.99                           | 0.97          | 0.85          | —              |
|  | 0.50 at 12,000 operating hours |               |               |                |
| Other single-capped Fluorescent lamps operating on non-high frequency ballasts   | 0.98                           | 0.90          | 0.50          | —              |
| Other single-capped Fluorescent lamps on high frequency ballast with warm start  | 0.99                           | 0.98          | 0.88          | —              |
| T12 double-capped halophosphate Fluorescent lamps operating on US non-high frequency ballasts  | 0.94                           | 0.88          | 0.75          |                |

Fluorescent lamps without integrated ballast shall respect the criteria of table 10:

**Table 10: Functionality and endurance requirements for non-directional compact fluorescent lamps operated on external control gear (CFLni)**

| Parameter  | Requirements  |
|--|---|
| Lamp survival factor at 6000 h                         | ≥ 0.70  |
| Lumen maintenance                                      | At 2,000 h: ≥ 83 %<br>At 6,000 h: ≥ 70%                                     |
| Lamp warm-up time to 60% total rated luminous flux (Φ) | < 40 s<br>or < 100 s for lamps containing mercury in amalgam form           |
| Premature failure rate                                 | ≤ 5.0 % at 1,000 h  |
| Color rendering (Ra)                                   | ≥ 80<br>≥ 65 if the lamp is intended for outdoor or industrial applications |

**D.2 - Functionality and endurance requirements for metal halide lamps and High-pressure sodium**

**Table 11: Functionality and endurance requirements for High-pressure sodium lamps**

| High pressure sodium lamp category and burning hours for measurement |   | Lamp lumen maintenance factor | Lamp survival factor |
|--|---|-------------------------------|----------------------|
| P ≤ 75 W<br>LLMF and LSF measured at 12,000 burning hours            | Ra ≤ 60   | > 0.80                        | > 0.90               |
|  | Ra > 60   | > 0.75                        | > 0.75               |
|  | all retrofit lamps designed to operate on high pressure mercury vapour lamp ballast | > 0.75                        | > 0.80               |
| P > 75 W<br>LLMF and LSF measured at 16,000 burning hours            | Ra ≤ 60   | > 0.85                        | > 0.90               |
|  | Ra > 60   | > 0.70                        | > 0.65               |
|  | all retrofit lamps designed to operate on high pressure mercury vapour lamp ballast | > 0.75                        | > 0.55               |

**Table 12: Functionality and endurance requirements for metal halide lamps**

| High pressure sodium lamp category and burning hours for measurement |             | Lamp lumen maintenance factor | Lamp survival factor |
|--|-------------|-------------------------------|----------------------|
| Phase 1  | P < 1,000 W | ≥ 60% at 6,000h               | ≥ 60% at 6,000h      |
|  | P ≥ 1,000 W | ≥ 50% at 6,000h               | ≥ 50% at 6,000h      |
| Phase 2 (1 <sup>st</sup> of January 2020)                            | All power   | > 80% at 12,000h              | > 80% at 12,000h     |

### D.3 - Functionality and endurance requirements for non-directional LED lamps and luminaires

**Table 13: Functionality and endurance requirements for non-directional LED lamps and luminaires**

| Parameter  | Performance required  |
|--|---|
| Lamp survival factor at 6,000 h  | ≥ 0.90  |
| Lumen Maintenance at 6,000 h   | ≥ 0.80  |
| Number of switching cycles before failure  | ≥ 15,000 if rated lamp life ≥ 30,000 h<br>otherwise:<br>≥ half the rated lamp life expressed in hours   |
| Starting time  | < 0.5 s   |
| Lamp warm-up time to 95 % Φ  | < 2 s   |
| Premature failure rate   | ≤ 5.0 % at 1,000 h  |
| Color rendering (Ra)   | ≥ 80<br>≥ 65 if the lamp is intended for outdoor or industrial applications   |
| Color consistency  | Variation of chromaticity coordinates within a six-step MacAdam ellipse or less.  |
| Lamp displacement factor (Df) with integrated control gear and integrated luminaires | P ≤ 2 W: no requirement<br>2 W < P ≤ 5 W: Df ≥ 0.4<br>5 W < P ≤ 25 W: Df ≥ 0.7 <sup>(1)</sup><br>P > 25 W: Df ≥ 0.9<br><sup>(1)</sup> During one year after date of enforcement<br>Df ≥ 0.5 is accepted for lamps with 5 W < P ≤ 25 W |

## ANNEX E – Energy efficiency requirements for directional lamps

### E.1 - Calculation of the energy efficiency index for directional lamps

For the calculation of the energy efficiency index (EEI) of a model, its corrected rated power for any control gear losses is compared with its reference power.

The EEI is calculated as follows and rounded to two decimal places:

$$EEI = \frac{P_{cor}}{P_{ref}}$$

$P_{cor}$  is defined as:

For models *without* external control gear,  $P_{cor}$  is the rated power ( $P_{rated}$ ).

For models *with* external control gear,  $P_{cor}$  is the rated power ( $P_{rated}$ ) corrected in accordance with the correction factors listed below:

**Table 14: Power correction if the model requires external control gear**

| Scope of the correction   | Corrected power ( $P_{cor}$ )  |
|---|--|
| Lamp operating on external LED lamp control gear  | $P_{rated} \times 1.10$  |
| Fluorescent lamps of 16mm diameter (T5 lamps) and 4 pin single capped fluorescent lamps operating on external fluorescent lamp control gear | $P_{rated} \times 1.10$  |
| Other lamps operating on external fluorescent lamp control gear   | $P_{rated} \times \frac{0.24\sqrt{\Phi_{use}} + 0.0103 \times \Phi_{use}}{0.15\sqrt{\Phi_{use}} + 0.0097 \times \Phi_{use}}$ |
| Lamps operating on external high-intensity discharge lamp control gear  | $P_{rated} \times 1.10$  |
| Lamps operating on external low pressure sodium lamp control gear   | $P_{rated} \times 1.15$  |
| Lamps with anti-glare shield  | $P_{rated} \times 0.80$  |

The useful luminous flux ( $\Phi_{use}$ ) is defined in accordance with Table 15.

**Table 15: Definition of useful luminous flux**

| Type  | Useful luminous flux ( $\Phi_{use}$ )                            |
|---|--|
| Directional lamps with a beam angle $\geq 90^\circ$ other than filament lamps and carrying a textual or graphical warning on their packaging that they are not suitable for accent lighting | Rated luminous flux in a $120^\circ$ cone ( $\Phi_{120^\circ}$ ) |
| Other directional lamps   | Rated luminous flux in a $90^\circ$ cone ( $\Phi_{90^\circ}$ )   |

The rated power  $P_{rated}$  of the lamps/luminaires is measured at their nominal input voltage.

$P_{ref}$  is defined as:

$P_{ref}$  is the reference power obtained from the rated value of the useful luminous flux of the model ( $\Phi_{use}$ ) by the following formulae:

For models with  $\Phi_{use} < 1300$  lumen:  $P_{ref} = 0.88\sqrt{\Phi_{use}} + 0.049 \times \Phi_{use}$

For models with  $\Phi_{use} \geq 1300$  lumen:  $P_{ref} = 0.07341 \times \Phi_{use}$

## E.2 - Maximum allowable EEI for directional lamps

The maximum EEI of directional lamps is indicated in Table 16

**Table 16: Maximum energy efficiency index (EEI)**

| Lamp type   |        |      |      |                                |
|-------------|--------|------|------|--------------------------------|
|             | CFL/ni | LFL  | LED  | High Intensity Discharge (HID) |
| Maximum EEI | 0.24   | 0.24 | 0.24 | 0.50                           |

Enforcement date: 6 months after publication in the Official Gazette (Um Al-Qura)

## E.3 - Energy efficiency classes

The energy efficiency rating of lamps/luminaires shall be determined on the basis of their energy efficiency index (EEI) as outlined in Table 17.

**Table 17: Energy efficiency classes for directional lamps**

| Energy efficiency index (EEI) | Energy efficiency class (Arabic) | Equivalent energy efficiency class (English) |
|-------------------------------|----------------------------------|--|
| $EEI \leq 0.11$               | أ                                | A  |
| $0.11 < EEI \leq 0.13$        | ب                                | B  |
| $0.13 < EEI \leq 0.18$        | ج                                | C  |
| $0.18 < EEI \leq 0.24$        | د                                | D  |
| $0.24 < EEI \leq 0.50$        | هـ                               | E  |
| $0.50 < EEI \leq 0.95$        | و                                | F  |
| $0.95 < EEI \leq 1.75$        | ز                                | G  |

*Note: For labelling purposes, the Arabic letters shall be used. The equivalent English version is only provided for informational purposes*

## E.4 - Annual energy consumption

The annual energy consumption  $E_y$  is calculated on a basis of 1,000h of operation according to the following:

$$E_y = P_{cor} \times \frac{D_{op}}{1000} \quad [\text{kWh}]$$

with

$P_{cor}$ : Corrected power (rated) [W]  
 $D_{op}$ : Duration of operation [h]  
 1,000: Conversion factor [-]

## ANNEX F – Functionality requirements for directional lamps and integrated luminaires

The lamp functionality requirements are outlined in Table 18 for directional LED lamps and integrated luminaires.

For the purposes of testing the number of times the lamp can be switched on and off before failure, the switching cycle shall consist of periods comprising 1 minute on and 3 minutes off or 5 minutes on and 5 minutes off.

For the purposes of testing lamp lifetime, lamp survival factor, lumen maintenance and premature failure, the standard switching cycle shall be used.

**Table 18: Functionality and endurance requirements for directional LED lamps and integrated luminaires**

| Parameter  | Requirements   |
|--|--|
| Lamp survival factor at 6,000 h  | $\geq 0.90$  |
| Lumen Maintenance at 6,000 h   | $\geq 0.80$  |
| Number of switching cycles before failure  | $\geq 15,000$ if rated lamp life $\geq 30,000$ h<br>otherwise:<br>$\geq$ half the rated lamp life expressed in hours   |
| Starting time  | $< 0.5$ s  |
| Premature failure rate   | $\leq 5.0$ % at 1,000 h  |
| Color rendering (Ra)   | $\geq 80$<br>$\geq 65$ if the lamp is intended for outdoor or industrial applications  |
| Color consistency  | Variation of chromaticity coordinates within a six-step MacAdam ellipse or less.   |
| Lamp displacement factor (Df) for lamps with integrated control gear and integrated luminaires | $P \leq 2$ W: no requirement<br>$2$ W $< P \leq 5$ W: $Df > 0.4$<br>$5$ W $< P \leq 25$ W: $Df > 0.7^{(1)}$<br>$P > 25$ W: $Df > 0.9$<br><sup>(1)</sup> during one year after date of enforcement $Df \geq 0.5$ is accepted for lamps with $5$ W $< P \leq 25$ W |

## **ANNEX G – Marking requirements for non-directional and directional lamps**

### **G.1 - Information to be displayed on the lamp itself**

For lamps other than high-intensity discharge lamps, the following shall be printed on the bulb with non-removable ink:

- Brand name
- Input voltage
- Nominal power
- Country of origin

### **G.2 - Information to be visibly displayed to end-users, prior to their purchase, on the packaging and on free access websites**

The information in paragraphs (a) to (y) below shall be displayed on free-access websites and in any other form the manufacturer deems appropriate.

The information in paragraphs (a) to (p) below shall be visibly displayed on the packaging if the product is intended to be displayed to the end-users.

The information does not need to use the exact wording on the list below. It may be displayed in the form of graphs, drawings or symbols rather than text.

- a. Brand name;
- b. Model number;
- c. Country of origin;
- d. Rated voltage and rated frequency;
- e. Rated useful luminous flux;
- f. Efficacy (lumen/Watt);
- g. Rated power;
- h. Rated beam angle in degrees (only for directional lamps);
- i. Lamp displacement factor (only for LED lamps with integrated control gear);
- j. Rated life time of the lamp in hours;
- k. Rated Color temperature, as a value in Kelvins, expressed graphically or in words;
- l. Number of switching cycles before premature failure (only for LED lamps or if claimed by the manufacturer for other type of lamps);
- m. Color rendering index (Ra);
- n. Stating all hazardous material contained in the lamp/luminaire, as relevant;
- o. Statement referring to a Website
  - on how to clean lamp debris in case of accidental lamp breakage and disposal of lamp at the end of life, when relevant;
  - About actual values of the hazardous content, when relevant
- p. A warning if the lamp cannot be dimmed or can be dimmed only on specific dimmers; in the latter case, a list of compatible dimmers shall be also provided on the manufacturer's website

Following information are optional:

- q. Lamp type: directional or non-directional
- r. Color consistency (only for LED lamps);
- s. Lumen maintenance factor at the end of the nominal life;
- t. Warm-up time up to 60 % of the full light output (may be indicated as 'instant full light' if less than 1 second), when relevant;
- u. If designed for optimum use in non-standard conditions (such as ambient temperature  $T_a \neq 25\text{ }^\circ\text{C}$  or specific thermal management is necessary), provide information on those conditions;
- v. Rated peak intensity in candela (cd), when available;
- w. An equivalence claim involving the power of a replaced lamp type may be displayed only if the lamp type is listed in Part 1 - Table 13 and if the luminous flux of the lamp in a  $90^\circ$  cone ( $\Phi_{90^\circ}$ ) is not lower than the corresponding reference luminous flux in Part 1 - Table 13. The reference luminous flux shall be multiplied by the correction factor in Part 1 - Table 14. For LED lamps, it shall be in addition multiplied by the correction factor in Part 1 - Table 15. The intermediate values of both the luminous flux and the claimed equivalent lamp.
- x. For LED lamps, if intended for use in outdoor or industrial applications, an indication to this effect;
- y. Lamp dimensions in millimeters (length and largest diameter);
- z. Actual values of all hazardous material contained in the lamp/luminaire



# ANNEX H – Requirement on ballast for fluorescent lamps without integrated ballast and ballast/driver for high intensity discharge, halogen and LED lamps

## H.1 - Ballast energy performance requirements

### H1.1 - Ballast for all types of lamps

The no-load power of a lamp control gear intended for use between the mains and the switch for turning the lamp load on/off shall not exceed 1.00W.

For lamp control gear with output power (P) over 250 W, the no-load power limits shall be multiplied by P/250 W.

The standby power of a lamp control gear shall not exceed 1.00 W.

### H1.2 - Additional requirement for control gear for halogen and LED lamps

The efficiency of control gear shall be at least 0,91 at 100 % load.

### H1.3 - Additional requirement for ballasts for high intensity discharge lamps

Ballasts for high intensity discharge lamps shall have the efficiency described in Table 19.

**Table 19: Minimum efficiency for ballasts for high intensity discharge lamps**

| Nominal lamp power<br>(P)<br>W | Minimum ballast efficiency<br>( $\eta_{ballast}$ )<br>% |
|--------------------------------|---|
| $P \leq 30$                    | 65  |
| $30 < P \leq 75$               | 75  |
| $75 < P \leq 105$              | 80  |
| $105 < P \leq 405$             | 85  |
| $P > 405$                      | 90  |

### H1.4 - Additional requirement for ballasts for fluorescent lamps

Multi-wattage ballasts shall comply with the requirements below according to each nominal power on which they operate.

The minimum energy efficiency index class shall be B2 for ballasts covered by table 20, A3 for the ballasts covered by table 21, and A1 for dimmable ballasts covered by table 22.

At the dimming position corresponding to 25 % of the lumen output of the operated lamp, the input power ( $P_{in}$ ) of the lamp-ballast circuit shall not exceed:

$$P_{in} < 50 \% * P_{Lrated} / \eta_{ballast}$$

Where  $P_{Lrated}$  is the rated lamp power and  $\eta_{ballast}$  is the minimum energy efficiency limit of the respective EEI class.

The power consumption of the fluorescent lamp ballasts shall not exceed 100 W when operated lamps do not emit any light in normal operating conditions and when other possible connected components (network connections, sensors etc.) are disconnected. If they cannot be disconnected, their power shall be measured and deducted from the result.

Table 20 contains the EEI classes for ballasts which are designed to operate the lamps mentioned in the table or other lamps which are designed to be operated by the same ballasts as the lamps mentioned in the table (meaning that the data of the reference ballast is equal).

**Table 20: Energy efficiency index requirements for non-dimmable ballasts for fluorescent lamps**

| LAMP DATA |               |                                    |                     |      | BALLAST EFFICIENCY ( $P_{lamp}/P_{input}$ ) |          |          |          |          |
|-----------|---------------|------------------------------------|---------------------|------|---|----------|----------|----------|----------|
|           |               |                                    |                     |      | Non-dimmable                                |          |          |          |          |
| Lamp type | Nominal Power | ILCOS CODE                         | Rated/typical Power |      | Class A2 BAT                                | Class A2 | Class A3 | Class B1 | Class B2 |
|           | W             |                                    | 60 Hz               | HF   |   |          |          |          |          |
|           |               |                                    | W                   | W    |   |          |          |          |          |
| T8        | 15            | FD-15-E-G13-26/450                 | 15                  | 13.5 | 87.8%                                       | 84.4%    | 75.0%    | 67.9%    | 62.0 %   |
| T8        | 18            | FD-18-E-G13-26/600                 | 18                  | 16   | 87.7%                                       | 84.2%    | 76.2%    | 71.3%    | 65.8 %   |
| T8        | 30            | FD-30-E-G13-26/900                 | 30                  | 24   | 82.1%                                       | 77.4%    | 72.7%    | 79.2%    | 75.0 %   |
| T8        | 36            | FD-36-E-G13-26/1200                | 36                  | 32   | 91.4%                                       | 88.9%    | 84.2%    | 83.4%    | 79.5 %   |
| T8        | 38            | FD-38-E-G13-26/1050                | 38.5                | 32   | 87.7%                                       | 84.2%    | 80.0%    | 84.1%    | 80.4 %   |
| T8        | 58            | FD-58-E-G13-26/1500                | 58                  | 50   | 93.0%                                       | 90.9%    | 84.7%    | 86.1%    | 82.2 %   |
| T8        | 70            | FD-70-E-G13-26/1800                | 69.5                | 60   | 90.9%                                       | 88.2%    | 83.3%    | 86.3%    | 83.1 %   |
| TC-L      | 18            | FSD-18-E-2G11                      | 18                  | 16   | 87.7%                                       | 84.2%    | 76.2%    | 71.3%    | 65.8 %   |
| TC-L      | 24            | FSD-24-E-2G11                      | 24                  | 22   | 90.7%                                       | 88.0%    | 81.5%    | 76.0%    | 71.3 %   |
| TC-L      | 36            | FSD-36-E-2G11                      | 36                  | 32   | 91.4%                                       | 88.9%    | 84.2%    | 83.4%    | 79.5 %   |
| TCF       | 18            | FSS-18-E-2G10                      | 18                  | 16   | 87.7%                                       | 84.2%    | 76.2%    | 71.3%    | 65.8 %   |
| TCF       | 24            | FSS-24-E-2G10                      | 24                  | 22   | 90.7%                                       | 88.0%    | 81.5%    | 76.0%    | 71.3 %   |
| TCF       | 36            | FSS-36-E-2G10                      | 36                  | 32   | 91.4%                                       | 88.9%    | 84.2%    | 83.4%    | 79.5 %   |
| TC-D / DE | 10            | FSQ-10-E-G24q=1<br>FSQ-10-I-G24d=1 | 10                  | 9.5  | 89.4%                                       | 86.4%    | 73.1%    | 67.9%    | 59.4 %   |

|              |    |  |      |      |       |       |       |       |        |
|--------------|----|--|------|------|-------|-------|-------|-------|--------|
| TC-D / DE    | 13 | FSQ-13-E-G24q=1<br>FSQ-13-I-G24d=1                   | 13   | 12.5 | 91.7% | 89.3% | 78.1% | 72.6% | 65.0 % |
| TC-D / DE    | 18 | FSQ-18-E-G24q=2<br>FSQ-18-I-G24d=2                   | 18   | 16.5 | 89.8% | 86.8% | 78.6% | 71.3% | 65.8 % |
| TC-D / DE    | 26 | FSQ-26-E-G24q=3<br>FSQ-26-I-G24d=3                   | 26   | 24   | 91.4% | 88.9% | 82.8% | 77.2% | 72.6 % |
| TC-T / TE    | 13 | FSM-13-E-GX24q=1<br>FSM-13-I-GX24d=1                 | 13   | 12.5 | 91.7% | 89.3% | 78.1% | 72.6% | 65.0 % |
| TC-T / TE    | 18 | FSM-18-E-GX24q=2<br>FSM-18-I-GX24d=2                 | 18   | 16.5 | 89.8% | 86.8% | 78.6% | 71.3% | 65.8 % |
| TC-T / TC TE | 26 | FSM-26-E-GX24q=3<br>FSM-26-I-GX24d=3                 | 26.5 | 24   | 91.4% | 88.9% | 82.8% | 77.5% | 73.0 % |
| TC-DD / DDE  | 10 | FSS-10-E-GR10q<br>FSS-10-L/P/H-GR10q                 | 10.5 | 9.5  | 86.4% | 82.6% | 70.4% | 68.8% | 60.5 % |
| TC-DD / DDE  | 16 | FSS-16-E-GR10q<br>FSS-16-I-GR8<br>FSS-16-L/P/H-GR10q | 16   | 15   | 87.0% | 83.3% | 75.0% | 72.4% | 66.1 % |
| TC-DD / DDE  | 21 | FSS-21-E-GR10q<br>FSS-21-L/P/H-GR10q                 | 21   | 19.5 | 89.7% | 86.7% | 78.0% | 73.9% | 68.8 % |
| TC-DD / DDE  | 28 | FSS-28-E-GR10q<br>FSS-28-I-GR8<br>FSS-28-L/P/H-GR10q | 28   | 24.5 | 89.1% | 86.0% | 80.3% | 78.2% | 73.9 % |
| TC-DD / DDE  | 38 | FSS-38-E-GR10q<br>FSS-38-L/P/H-GR10q                 | 38.5 | 34.5 | 92.0% | 89.6% | 85.2% | 84.1% | 80.4 % |
| TC           | 5  | FSD-5-I-G23 FSD-5-E-2G7                              | 5.4  | 5    | 72.7% | 66.7% | 58.8% | 49.3% | 41.4 % |
| TC           | 7  | FSD-7-I-G23 FSD-7-E-2G7                              | 7.1  | 6.5  | 77.6% | 72.2% | 65.0% | 55.7% | 47.8 % |
| TC           | 9  | FSD-9-I-G23 FSD-9-E-2G7                              | 8.7  | 8    | 78.0% | 72.7% | 66.7% | 60.3% | 52.6 % |
| TC           | 11 | FSD-11-I-G23 FSD-11-E-2G7                            | 11.8 | 11   | 83.0% | 78.6% | 73.3% | 66.7% | 59.6 % |
| T5           | 4  | FD-4-E-G5-16/150                                     | 4.5  | 3.6  | 64.9% | 58.1% | 50.0% | 45.0% | 37.2 % |
| T5           | 6  | FD-6-E-G5-16/225                                     | 6    | 5.4  | 71.3% | 65.1% | 58.1% | 51.8% | 43.8 % |
| T5           | 8  | FD-8-E-G5-16/300                                     | 7.1  | 7.5  | 69.9% | 63.6% | 58.6% | 48.9% | 42.7 % |

|      |    |                             |    |      |       |       |       |       |        |
|------|----|-----------------------------|----|------|-------|-------|-------|-------|--------|
| T5   | 13 | FD-13-E-G5-16/525           | 13 | 12.8 | 84.2% | 80.0% | 75.3% | 72.6% | 65.0 % |
| T9-C | 22 | FSC-22-E-G10q-29/200        | 22 | 19   | 89.4% | 86.4% | 79.2% | 74.6% | 69.7 % |
| T9-C | 32 | FSC-32-E-G10q-29/300        | 32 | 30   | 88.9% | 85.7% | 81.1% | 80.0% | 76.0 % |
| T9-C | 40 | FSC-40-E-G10q-29/400        | 40 | 32   | 89.5% | 86.5% | 82.1% | 82.6% | 79.2 % |
| T2   | 6  | FDH-6-L/P-W4,3x8,5d-7/ 220  |    | 5    | 72.7% | 66.7% | 58.8% |       |        |
| T2   | 8  | FDH-8-L/P-W4,3x8,5d-7/ 320  |    | 7.8  | 76.5% | 70.9% | 65.0% |       |        |
| T2   | 11 | FDH-11-L/P-W4,3x8,5d-7/ 420 |    | 10.8 | 81.8% | 77.1% | 72.0% |       |        |
| T2   | 13 | FDH-13-L/P-W4,3x8,5d-7/ 520 |    | 13.3 | 84.7% | 80.6% | 76.0% |       |        |
| T2   | 21 | FDH-21-L/P-W4,3x8,5d-7/     |    | 21   | 88.9% | 85.7% | 79.2% |       |        |
| T2   | 23 | FDH-23-L/P-W4,3x8,5d-7/     |    | 23   | 89.8% | 86.8% | 80.7% |       |        |
| T5-E | 14 | FDH-14-G5-L/P-16/550        |    | 13.7 | 84.7% | 80.6% | 72.1% |       |        |
| T5-E | 21 | FDH-21-G5-L/P-16/850        |    | 20.7 | 89.3% | 86.3% | 79.6% |       |        |
| T5-E | 24 | FDH-24-G5-L/P-16/550        |    | 22.5 | 89.6% | 86.5% | 80.4% |       |        |
| T5-E | 28 | FDH-28-G5-L/P-16/1150       |    | 27.8 | 89.8% | 86.9% | 81.8% |       |        |
| T5-E | 35 | FDH-35-G5-L/P-16/1450       |    | 34.7 | 91.5% | 89.0% | 82.6% |       |        |
| T5-E | 39 | FDH-39-G5-L/P-16/850        |    | 38   | 91.0% | 88.4% | 82.6% |       |        |
| T5-E | 49 | FDH-49-G5-L/P-16/1450       |    | 49.3 | 91.6% | 89.2% | 84.6% |       |        |
| T5-E | 54 | FDH-54-G5-L/P-16/1150       |    | 53.8 | 92.0% | 89.7% | 85.4% |       |        |
| T5-E | 80 | FDH-80-G5-L/P-16/1150       |    | 80   | 93.0% | 90.9% | 87.0% |       |        |
| T5-E | 95 | FDH-95-G5-L/P-16/1150       |    | 95   | 92.7% | 90.5% | 84.1% |       |        |

|       |     |  |  |      |       |       |       |  |  |
|-------|-----|--|--|------|-------|-------|-------|--|--|
| T5-E  | 120 | FDH-120-G5-L/P-16/1450                         |  | 120  | 92.5% | 90.2% | 84.5% |  |  |
| T5-C  | 22  | FSCH-22-L/P-2GX13-16/ 225                      |  | 22.3 | 88.1% | 84.8% | 78.8% |  |  |
| T5-C  | 40  | FSCH-40-L/P-2GX13-16/ 300                      |  | 39.9 | 91.4% | 88.9% | 83.3% |  |  |
| T5-C  | 55  | FSCH-55-L/P-2GX13-16/ 300                      |  | 55   | 92.4% | 90.2% | 84.6% |  |  |
| T5-C  | 60  | FSCH-60-L/P-2GX13-16/ 375                      |  | 60   | 93.0% | 90.9% | 85.7% |  |  |
| TC-LE | 40  | FSDH-40-L/P-2G11                               |  | 40   | 91.4% | 88.9% | 83.3% |  |  |
| TC-LE | 55  | FSDH-55-L/P-2G11                               |  | 55   | 92.4% | 90.2% | 84.6% |  |  |
| TC-LE | 80  | FSDH-80-L/P-2G11                               |  | 80   | 93.0% | 90.9% | 87.0% |  |  |
| TC-TE | 32  | FSMH-32-L/P-2GX24q=3                           |  | 32   | 91.4% | 88.9% | 82.1% |  |  |
| TC-TE | 42  | FSMH-42-L/P-2GX24q=4                           |  | 43   | 93.5% | 91.5% | 86.0% |  |  |
| TC-TE | 57  | FSM6H-57-L/P-2GX24q=5<br>FSM8H-57-L/P-2GX24q=5 |  | 56   | 91.4% | 88.9% | 83.6% |  |  |
| TC-TE | 70  | FSM6H-70-L/P-2GX24q=6<br>FSM8H-70-L/P-2GX24q=6 |  | 70   | 93.0% | 90.9% | 85.4% |  |  |
| TC-TE | 60  | FSM6H-60-L/P-2G8=1                             |  | 63   | 92.3% | 90.0% | 84.0% |  |  |
| TC-TE | 62  | FSM8H-62-L/P-2G8=2                             |  | 62   | 92.2% | 89.9% | 83.8% |  |  |
| TC-TE | 82  | FSM8H-82-L/P-2G8=2                             |  | 82   | 92.4% | 90.1% | 83.7% |  |  |
| TC-TE | 85  | FSM6H-85-L/P-2G8=1                             |  | 87   | 92.8% | 90.6% | 84.5% |  |  |
| TC-TE | 120 | FSM6H-120-L/P-2G8=1<br>FSM8H-120-L/P-2G8=1     |  | 122  | 92.6% | 90.4% | 84.7% |  |  |
| TC-DD | 55  | FSSH-55-L/P-GRY10q3                            |  | 55   | 92.4% | 90.2% | 84.6% |  |  |

In addition, non-dimmable ballasts not included in table 20 shall be assigned an EEI depending on their efficiency as described in Table 21.

**Table 21: Energy efficiency index requirements for non-dimmable ballasts for fluorescent lamps not included in Table 20**

| $\eta$ ballast             | Energy Efficiency Index |
|----------------------------|-------------------------|
| $\geq 0.94 * EBb_{FL}$     | A3                      |
| $\geq EBb_{FL}$            | A2                      |
| $\geq 1-0.75*(1-EBb_{FL})$ | A2 BAT                  |

Furthermore, dimmable fluorescent lamp ballasts receive EEI classes according to the class into which the ballast would fall when it is operated at the 100 % lumen output, as described in Table 22.

**Table 22: Energy efficiency index requirements for dimmable ballasts for fluorescent lamps**

| Complied class at 100 % lumen output | Energy Efficiency Index of dimmable ballast |
|--------------------------------------|---|
| A3                                   | A1  |
| A2                                   | A1 BAT                                      |

Multi-wattage ballasts shall either be classified according to their efficiency under the lowest (worst) efficiency, or a relevant class shall be indicated for each operated lamp.

## H.2 - Product information requirements on ballasts

Manufacturers of ballasts shall provide at least the following information on free-access websites and in other forms they deem appropriate for each of their ballast models. That information shall also be affixed in a distinct and durable form to the ballast. It shall also be contained in the technical documentation file drawn up for the purposes of conformity assessment.

For ballasts for fluorescents lamps, an energy efficiency index (EEI) class shall be provided as defined below.

‘Energy efficiency index’ (EEI) means a classification system of ballasts for fluorescent lamps without integrated ballasts in classes according to efficiency limit values. The classes for non-dimmable ballasts are (in descending order of efficiency) A2 BAT, A2, A3, B1, B2 and for dimmable ballasts A1 BAT and A1.

## ANNEX I – Energy label for lamps and integrated luminaires

### 1.1 - Determining the energy efficiency class

The energy efficiency class for each product shall be determined as outlined in Table 6 in Annex C (non-directional lamps), as outlined in Table 17 in Annex E (directional lamps) or in Table 37 in Annex M for integrated luminaires.

### 1.2 - Design and placement of the label

The label is issued automatically by SASO application at the end of the registration process.

Energy efficiency classes shall each be represented as follows with a fixed number of color-coded bars as outlined in Table 23 and illustrated in Figure 1, Figure 2, or Figure 3.

**Table 23: Energy efficiency class representation**

| Bar color   | Energy efficiency class (Arabic) | Equivalent energy efficiency class (English) |
|-------------|----------------------------------|--|
| Dark green  | أ                                | A  |
| Green       | ب                                | B  |
| Light green | ج                                | C  |
| Yellow      | د                                | D  |
| Orange      | هـ                               | E  |
| Red         | و                                | F  |
| Dark red    | ز                                | G  |

*Note: For labelling purposes, the Arabic letters shall be used. The equivalent English version is only provided for informational purposes.*

The label shall be printed directly on one side of the individual packaging of the product.

The label shall be (43 mm wide and 75 mm high) as in Figure 1 without alteration. If the label would cover more than 70 % of the surface area of the largest side, then the label presented in Figure 2 (43 mm wide and 45 mm high) shall be used.

Individual packaging with dimensions less than (43 mm wide and 45 mm high) shall have a printed label with the design in Figure 3 (resized to fit the individual packaging) on one side. Additionally, a separate QR code will be generated by SASO registration system and shall be printed separately on the individual packaging without alteration.

The label shall be printed on the most prominent part of the individual product packaging to be easily visible to the end-user.

### 1.3 - Information and values contained on the label


The fields (a), (b), (c), (d), (e), (f), (g), (h) and (i) outlined in Figures 1 - 3 (given for illustration) shall comply with the following requirements:


- **Field (a):** This field shall display the logo of the Saudi Standards, Metrology and Quality Organization (SASO).
- **Field (b):** This field shall reflect the energy efficiency class, which the product attained, based on its energy efficiency index (EEI).

- **Field (c):** This field shall have a QR code representing the main characteristics of the lamp or integrated luminaire, this may include the following items based on the data provided in the registration form (Annex O):
  - Manufacturer name
  - Model number
  - Country of origin
  - Luminous flux (lumens)
  - Beam angle (for directional lamps only)
  - Lifetime (h)
  - Rated power (W)
  - EEI (unit-less)
  - Efficacy (lumens/W)
  - Color Rendering Index (Ra)
  - Color temperature (K)
  - Annual electricity consumption (kWh/year)
  
- **Field (d):** this field identifies the brand name of the product.
- **Field (e):** this field identifies the country of origin
- **Field (f) :** this field identifies the model number
- **Field (g):** this field identifies the lighting type
- **Field (h):** this field identifies the registration number and the standard reference number
- **Field (i):** this field identifies the legal statement



Figure 1 – Label for lighting products

(a)  الهيئة السعودية للمواصفات والمقاييس والجودة  
Saudi Standards, Metrology and Quality Org.

بطاقة كفاءة الطاقة  
ENERGY EFFICIENCY LABEL 

LIGHTING | الإنارة

أ  
ب  
ج  
د  
هـ  
و  
ز

(b)

BRAND NAME العلامة التجارية (d)

MADE IN (e) بلد الصنع


MODEL NUMBER رقم الطراز (f)

LIGHTING TYPE (g) نوع الإنارة


رقم التسجيل  
REGISTRATION NO  
الرقم المرجعي للمواصفة

STANDARD REFERENCE NO (h)


إزالة أو تغطية أو العبث بهذه البطاقة قبل البيع يجعلك عرضة للمسؤولية النظامية  
Removing, covering or altering this label before sale can subject you to legal liability (i)

(c) 

**Figure 2 – Alternative label for lighting products**

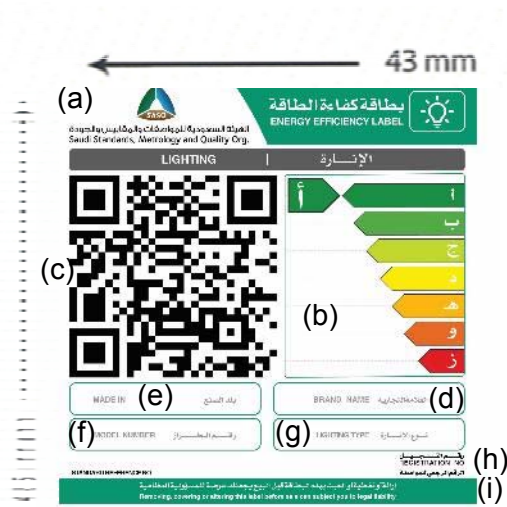

**Figure 3 – Alternative label for small packaging**

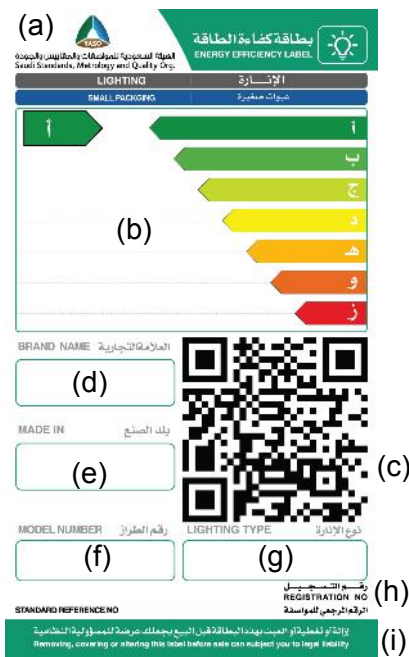

## ANNEX J – Hazardous chemicals: Substance restrictions for lamps & control gears

The following limits for hazardous substances apply.

**Table 24: Maximum content limits of hazardous substances**

| Descriptions                         | Tolerated mcv of substance by weight in homogeneous materials |
|--------------------------------------|---|
| Lead(Pb)                             | 0.1%  |
| Cadmium (Cd)                         | 0.01%   |
| Hexavalent chromium (Cr6+)           | 0.1%  |
| Polybrominated biphenyls (PBB)       | 0.1%  |
| Polybrominated diphenyl ether (PBDE) | 0.1%  |

Table 25 outlines exemptions to the hazardous substance limits set in this annex. Eligible products or components have no limit on the levels of the relevant hazardous substance.

**Table 25: Lamps exempted from limits listed in Table 24**

| Description  | Requirements |
|--|--------------|
| Electrical and electronic components containing lead in a glass or ceramic other than dielectric ceramic in capacitors, e.g. piezoelectronic devices, or in a glass or ceramic matrix compound | No limit     |
| Lead in dielectric ceramic in capacitors for a rated voltage of 125V AC or 250V DC or higher   | No limit     |
| Lead in glass of fluorescent tubes not exceeding 0.2% by weight  | No limit     |
| Cadmium and its compounds in electrical contacts   | No limit     |
| Lead as an alloying element in aluminum containing up to 0.4 % lead by weight  | No limit     |
| Copper alloy containing up to 4 % lead by weight   | No limit     |
| Lead in high melting temperature type solders (i.e. lead- based alloys containing 85 % by weight or more lead)   | No limit     |
| Lead and cadmium in printing inks for the application of enamels on glasses, such as borosilicate and soda lime glasses  | No limit     |
| Lead in glass of fluorescent tube not exceeding 0.2% by weight   | No limit     |

Table 26 outlines the limit on mercury content per lamp applicable to single and double capped fluorescent lamps (without integrated ballast) and high intensity discharge lamps for general lighting purposes. All other lamp types in this Standard shall not have mercury limits.

**Table 26: Maximum mercury content**

| Lamp type   | Limit  |
|---|--------|
| <b>Mercury in single capped (compact) fluorescent lamps</b>   |        |
| ≥30 W and <150 W  | 5.0 mg |
| <30 W   | 2.5 mg |
| <30 W with long lifetime (> 15,000 h)   | 3.5 mg |
| With circular or square structural shape or other non-linear with tube diameter ≤ 17 mm   | 7.0 mg |
| <b>Mercury in double-capped linear fluorescent lamps</b>  |        |
| Tri-band phosphor with normal lifetime and a tube diameter < 9 mm (e.g. T2)   | 5.0 mg |
| Tri-band phosphor with normal lifetime and a tube diameter ≥ 9 mm and ≤ 17 mm (e.g. T5)   | 5.0 mg |
| Tri-band phosphor with normal lifetime and a tube diameter > 17 mm and ≤ 28 mm (e.g. T8)  | 8.0 mg |
| Tri-band phosphor with normal lifetime and a tube diameter > 28 mm (e.g. T12)   | 5.0 mg |
| Tri-band phosphor with long lifetime (≥ 25,000 h) and T8 halophosphate  | 8.0 mg |
| <b>Mercury in other fluorescent lamps</b>   |        |
| Non-linear halophosphate lamps (all diameters)  | 15 mg  |
| Non-linear tri-band phosphor lamps with tube diameter > 17 mm (e.g. T9)   | 15 mg  |
| Lamps for other general lighting and special purposes (e.g. induction lamps)  | 15 mg  |
| T12 linear halophosphate lamps  | 10 mg  |
| <b>Mercury in other low pressure discharge lamps</b>  |        |
| <b>Mercury in High Pressure Sodium (vapour) lamps for general lighting purposes with improved color rendering index Ra &gt; 60</b>  |        |
| P ≤ 155 W   | 30 mg  |
| 155 W < P ≤ 405 W   | 40 mg  |
| P > 405 W   | 40 mg  |
| <b>Mercury in other High Pressure Sodium (vapour) lamps for general lighting purposes</b>   |        |
| P ≤ 155 W   | 25 mg  |
| 155 W < P ≤ 405 W   | 30 mg  |
| P > 405 W   | 40 mg  |
| <b>Mercury in metal halide lamps (MH)</b>   |        |
| <b>Mercury in High Pressure Mercury (vapour) lamps</b>  |        |
| <b>Mercury in other discharge lamps for special purposes not specifically mentioned in this Annex</b>   |        |
| no limit  |        |
| Note: Maximum mercury content limits for lamps (per burner) in the scope of this Standard (only applies to single capped fluorescent lamps without integrated ballast and high intensity discharge lamps for general lighting purposes) |        |

## ANNEX K – Tests methods for lamps and control gears

**Table 27: Standards applicable to all lamps covered by part 2**

| Organization                             | Reference   | Title   | Measured parameters  |
|--|---|---|--|
| IEC                                      | EN 60061-1:1993<br>All amendments up to A41:2009  | Lamp caps and holders together with gauges for the control of interchangeability and safety -- Part 1: Lamp caps        | <ul style="list-style-type: none"> <li>Lamp caps' geometry</li> </ul>  |
|  | EN 62471:2008                                     | Photo biological safety of lamps and lamp systems   | <ul style="list-style-type: none"> <li>Radiation (spectrum evaluation related to Annex I.1.d)</li> </ul>   |
| International Commission on Illumination | CIE 18.2:1983                                     | The Basis of Physical Photometry  | <ul style="list-style-type: none"> <li>Light beam angle</li> </ul>   |
| IEC                                      | 62321:2015 series                                 | Measurements of certain substances in electro technical products  | <p>Part 1: Introduction and overview</p> <p>Part 2: Disassembly, disjunction and mechanical sample preparation</p> <p>Part 3.1 Lead, mercury, cadmium, total chromium and total bromine using X-ray fluorescence spectrometry</p> <p>Part 4: Mercury in polymers, metals and electronics by CV-AAS, CV-AFS, ICP-OES and ICP-MS</p> <p>Part 5: Cadmium, lead and chromium in polymers and electronics and cadmium and lead in metals by AAS, AFS, ICP-OES and ICP-MS</p> <p>Part 6: Polybrominated biphenyls and polybrominated diphenyl ethers in polymers by gas chromatography - mass spectrometry (GC-MS)</p> |
| IEC                                      | IEC 62321-4 by CV-AAS, CV-AFS, ICP-OES and ICP-MS | Determination of certain substances in electrotechnical products – Part 4: Mercury in polymers, metals and electronics  | Mercury content  |
| IEC                                      | 62554:2011  | Sample preparation for measurement of mercury level in fluorescent lamps  | Methodology for preparation of the sampling for measurement of mercury content   |
| IEC                                      | IEC 62321-4 by CV-AAS, CV-AFS, ICP-OES and ICP-MS | Determination of certain substances in electro-technical products – Part 4: Mercury in polymers, metals and electronics | Mercury content  |

**Table 28: Standards applicable to fluorescent lamps**

| Organization | Reference  | Title   | Measured parameters   |
|--------------|--|---|---|
| IEC          | IEC<br>60081:1998<br>Amendments:<br>A1:2002<br>A2:2003<br>A3:2005<br>A4:2010                               | Double-capped<br>fluorescent lamps -<br>Performance<br>specifications | <ul style="list-style-type: none"> <li>• Lamp luminous flux</li> <li>• Power consumed by the lamp (excluding the power dissipated by auxiliary equipment such as ballasts)</li> <li>• Lamp Lumen Maintenance Factor (LLMF)<br/><b>Note:</b> in the standard LLMF is called “lumen maintenance”.</li> <li>• Lamp Survival Factor (LSF)<br/><b>Note:</b> LSF is not explicitly mentioned, only the method for life testing. LSF is deduced from the lumen maintenance curve according to Annex C of the standard.<br/>For the purposes of Table 6 in Annex III, the Lamp Survival Factor shall be measured in high frequency operating mode with a switching cycle of 11h on / 1h off. In other cases the switching cycle shall be the one set out in the standard.</li> <li>• Chromaticity</li> <li>• Correlated Colour Temperature (CCT)</li> <li>• Colour rendering</li> </ul> |
| IEC          | IEC<br>60901:1996<br>Amendments:<br>A1:1997<br>A2:2000<br>A3:2004<br>A4:2008<br>Draft A5<br>(34A/1358/CDV) | Single-capped<br>fluorescent lamps -<br>Performance<br>specifications | <ul style="list-style-type: none"> <li>• Lamp luminous flux</li> <li>• Power consumed by the lamp (excluding the power dissipated by auxiliary equipment such as ballasts)</li> <li>• Lamp Lumen Maintenance Factor (LLMF) <b>Note:</b> in the standard LLMF is called “lumen maintenance”.</li> <li>• Lamp Survival Factor (LSF)<br/><b>Note:</b> LSF is not explicitly mentioned, only the method for life testing. LSF is deduced from the lumen maintenance curve according to Annex C of EN 60081 (the version referred to in the row on double-capped fluorescent lamps).</li> <li>• Chromaticity</li> <li>• Correlated Colour Temperature (CCT)</li> <li>• Colour rendering</li> </ul>   |
| IES          | LM9  | Electric and<br>photometric<br>measurements of<br>fluorescent lamps   | <ul style="list-style-type: none"> <li>•</li> </ul>   |

|     |       |  |   |
|-----|-------|--|---|
| IES | LM 66 | Electrical and photometric measurements of Single-ended compacts fluorescent lamps | • |
|-----|-------|--|---|

**Table 29: Standards applicable to high-pressure mercury vapour lamps**

| Organization                             | Reference                              | Title   | Measured parameters   |
|--|--|---|---|
| IEC                                      | EN 62035:2000<br>Amendment:<br>A1:2003 | Discharge lamps (excluding fluorescent lamps) safety specifications             | <ul style="list-style-type: none"> <li>• Specific effective radiant UV power</li> </ul>   |
| IEC                                      | EN 60188:2001                          | High-pressure mercury vapour lamps - Performance specifications                 | <ul style="list-style-type: none"> <li>• Lamp luminous flux</li> <li>• Power consumed by the lamp (excluding the power dissipated by auxiliary equipment such as ballasts)</li> </ul> |
| International Commission on Illumination | CIE 97-2005                            | Maintenance of Indoor Electric Lighting Systems                                 | <ul style="list-style-type: none"> <li>• Lamp Lumen Maintenance Factor (LLMF)</li> <li>• Lamp Survival Factor (LSF)</li> </ul>  |
|  | CIE 154-2003                           | Maintenance of Outdoor Electric Lighting Systems                                |   |
|  | CIE 15-2004                            | Colourimetry  | <ul style="list-style-type: none"> <li>• Chromaticity</li> <li>• Correlated colour temperature</li> </ul>   |
|  | CIE 13.3-1995                          | Method of Measuring and Specifying Colour Rendering Properties of Light Sources | <ul style="list-style-type: none"> <li>• Colour rendering</li> </ul>  |

**Table 30: Standards applicable to high-pressure vapour lamps**

| Organisation | Reference                              | Title   | Measured parameters  |
|--------------|--|---|--|
| IEC          | EN 62035:2014<br>Amendment:<br>A1:2014 | Discharge lamps (excluding fluorescent lamps) safety specifications | <ul style="list-style-type: none"> <li>• Specific effective radiant UV power</li> </ul>  |
| IEC          | IEC 60662:2012                         | High-pressure sodium vapour lamps - Performance specifications      | <ul style="list-style-type: none"> <li>• Power consumed by the lamp (excluding the power dissipated by auxiliary equipment such as ballasts)</li> <li>• Lamp Lumen Maintenance Factor (LLMF)<br/><b>Note:</b> in the standard LLMF is called "lumen maintenance".</li> <li>• Lamp Survival Factor (LSF)<br/><b>Note:</b> LSF is not explicitly mentioned, only the method for life testing. LSF is deduced from</li> </ul> |

|  |               |   |   |
|--|---------------|---|---|
|  |               |   | the lumen maintenance curve according to Annex C of EN 60081 (the version referred to in the row on double-capped fluorescent lamps). |
| International Commission on Illumination IEC | CIE 84-1989   | Measurement of luminous flux  | <ul style="list-style-type: none"> <li>• Lamp luminous flux</li> <li>•</li> </ul>   |
|  | CIE 15-2004   | Colourimetry  | <ul style="list-style-type: none"> <li>• Chromaticity</li> <li>• Correlated colour temperature</li> </ul>                             |
|  | CIE 13.3-1995 | Method of Measuring and Specifying Colour Rendering Properties of Light Sources | <ul style="list-style-type: none"> <li>• Colour rendering</li> </ul>  |

**Table 31: Standards applicable to metal halide lamps**

| Organization                             | Reference                | Title   | Measured parameters  |
|--|--------------------------|---|--|
| IEC                                      | EN 62035:2014            | Discharge lamps (excluding fluorescent lamps) safety specifications             | <ul style="list-style-type: none"> <li>• Specific effective radiant UV power</li> </ul>  |
| IEC                                      | IEC 61167 (34A/1326/CDV) | Metal halide lamps - Performance specifications                                 | <ul style="list-style-type: none"> <li>• Power consumed by the lamp (excluding the power dissipated by auxiliary equipment such as ballasts)</li> <li>• Lamp Lumen Maintenance Factor (LLMF)<br/><b>Note:</b> in the standard LLMF is called "lumen maintenance".</li> <li>• Lamp Survival Factor (LSF)<br/><b>Note:</b> LSF is not explicitly mentioned, only the method for life testing. LSF is deduced from the lumen maintenance curve according to Annex C of EN 60081 (the version referred to in the row on double-capped fluorescent lamps).</li> </ul> |
| International Commission on Illumination | CIE 84-1989              | Measurement of luminous flux  | <ul style="list-style-type: none"> <li>• Lamp luminous flux</li> </ul>   |
|  | CIE 15-2004              | Colourimetry  | <ul style="list-style-type: none"> <li>• Chromaticity</li> <li>• Correlated colour temperature</li> </ul>  |
|  | CIE 13.3-1995            | Method of Measuring and Specifying Colour Rendering Properties of Light Sources | <ul style="list-style-type: none"> <li>• Colour rendering</li> </ul>   |

**Table 32: Standards applicable to ballasts**

| Organization  | Reference | Title                                     | Measured parameters  |
|---|-----------|---|--|
| Ballasts for fluorescent lamps (both high frequency and | CENELEC   | EN 50294:1998 Amendments: A1:2001 A2:2003 | <ul style="list-style-type: none"> <li>• Measurement method of total input power of ballast-lamp circuits</li> </ul> |



|                     |  |  |  |
|---------------------|--|--|--|
| non-high frequency) |  |  |  |
|---------------------|--|--|--|

**Table 33: Standards applicable to Luminaires and LED lamps not listed in SASO 2870**

| <b>Organization</b> | <b>Reference</b> | <b>Title</b>  | <b>Measured parameters</b>  |
|---------------------|------------------|---|---|
| IES                 | LM 80-08         | Measurement lumen maintenance of LED Light sources                                    | <ul style="list-style-type: none"> <li>• lumen maintenance</li> <li>• Lamps survival factor</li> </ul>  |
| IES                 | TM 28-14         | Projecting Long term Luminous flux maintenance of LED lamps and luminaires            | <ul style="list-style-type: none"> <li>• lumen maintenance</li> <li>• Lamps survival factor</li> </ul>  |
| IEC                 | IEC 62717        | LED modules for general lighting – Performance requirements                           | <ul style="list-style-type: none"> <li>• Power</li> <li>• Luminous flux</li> <li>• Displacement factor</li> <li>• CRI, CCT</li> <li>• Beam angle</li> <li>• Lumen maintenance</li> <li>• Endurance</li> </ul> |
| IEC                 | IEC 62722-1      | Luminaire performance – General requirements  | <ul style="list-style-type: none"> <li>• Power</li> <li>• Luminous flux</li> <li>• CRI, CCT, chromaticity coordinates</li> <li>• Beam angle</li> <li>• Lumen maintenance</li> <li>• Endurance</li> </ul>      |
| IEC                 | IEC 62722-2-1    | Luminaire performance – Particular requirements for LED luminaires                    | <ul style="list-style-type: none"> <li>• Power</li> <li>• Luminous flux</li> <li>• CRI, CCT, chromaticity coordinates</li> <li>• Beam angle</li> <li>• Lumen maintenance</li> <li>• Endurance</li> </ul>      |
| NEMA                | ANSI C78.377     | Electric Lamps — Specifications for the Chromaticity of Solid-state Lighting Products | <ul style="list-style-type: none"> <li>• Chromaticity</li> </ul>  |

## **ANNEX L – Measurement of the mercury content for fluorescent lamps**

### **L.1 – Default method for measurement**

Lamp samples shall be prepared for measurement according to IEC62554 “Sample preparation for measurement of mercury level in fluorescent lamps”

The average mercury content has to be measured in accordance with the CV AAS method as described in EN 62321-4 “Determination of certain substances in electro technical products – Part 4: Mercury in polymers, metals and electronics by CV-AAS, CV-AFS, ICP-OES and ICP-MS”

### **L.2 - Alternative method for measurement of the mercury content**

The following method is accepted as an alternative to IEC 62554 and IEC 62321-4 for the measurement of the mercury content

The applicant shall provide a test report stating that the mercury content has been measured using the method described below. The report shall state the average mercury content, calculated by analyzing ten lamps, and then deleting the highest and lowest values before calculating the arithmetic mean of the remaining eight values.

The test method for the mercury content is as follows. The arc tube is first separated from its plastic surrounds and associated electronics. The associated lead wires are cut as close to the glass seal as possible. The arc tube is taken to a fume cupboard and is cut into segments. The segments are placed in a suitably sized robust screw-capped plastic bottle to which is added a 1 inch diameter porcelain ball and 25 ml of high purity concentrated nitric acid (70 %). The bottle is sealed and shaken for a few minutes to reduce the arc tube to fine particle size, the stopper is periodically loosened to eliminate any possibility of pressure build-up. The contents of the bottle are allowed to react for 30 minutes during which time the contents are periodically agitated. The contents of the bottle are then filtered through an acid resistant filter paper and collected in a 100 ml graduated volumetric flask. Potassium dichromate is then added to the flask so that the final concentration is 1000 ppm with respect to chromium. The flask is then made up to volume with pure water. Matched standards are made up on a concentration range up to 200 ppm mercury. The solutions are analyzed using flame atomic absorption at a wavelength of 253.7 nm with background correction on. From the results obtained and knowledge of the solution volume, the original mercury content of the light bulb can be computed. The competent body may agree adaptations to the details of this test method if they are necessary for technical reasons, and these shall be applied in a consistent manner.

## ANNEX M – Energy efficiency for (integrated) luminaires

### M.1 - Types of luminaires

Definitions for the different types of luminaires are presented in Clause 3

Luminaires within the scope of this standard (integrated luminaires) are characterized as direct or indirect lighting sources depending of the beam angle of the light emission.

For information only, luminaires can be identified per type of use as expressed in Table 34

**Table 34: Use types for luminaires (informative)**

| Terms | Description                   | Content   |
|-------|-------------------------------|---|
| LT_1  | General (artificial) lighting | Lighting designed to provide an uniform level of illumination   |
| LT_2  | Local lighting                | Lighting designed to provide designed level of illumination over a specific area surrounding with lower illumination from spilled light source(s)   |
| LT_3  | Accent lighting               | Lighting that calls attention or adds interest to a particular object or unusual feature or interest of a room. Highlights, emphasizes illumination with a strong light from behind in order to embrace depth or to separate the object from the background, sidelights is highlights coming from the side. |
| LT_4  | Task lighting                 | Lighting designed to provide a strong illumination for visually demanding activities. It needs to be glare-free. Effective task lighting enhances visual clarity and keeps the eyes from getting tired.   |
| LT_5  | Ambient lighting              | An ambient source of light that washes the room with a glow. It flattens an interior and creates very little shadow.  |
| LT_6  | Aesthetic lighting            | Lighting as a piece of art. A neon sculpture would be purely decorative and illustrates aesthetic lighting.   |
| LT_7  | Natural lighting              | Lighting provided without any artificial lighting sources   |

### M.2 - Minimum Efficacy for luminaires

The minimum energy efficacy for luminaires are reported in Table 35, depending on the total power of the luminaires.

**Table 35: Minimum energy efficacy for (MEPS) Luminaires**

| Power of the luminaire               | Minimum value for efficacy   |
|--------------------------------------|------------------------------|
| $P_{\text{rated}} < 15 \text{ W}$    | $\geq 65 \text{ Lumen/Watt}$ |
| $P_{\text{rated}} \geq 15 \text{ W}$ | $\geq 70 \text{ Lumen/Watt}$ |

### M.3 - Energy Efficiency Index for luminaires (EEI)

The energy efficiency for luminaires is calculated as for the EEI for lamps of the same category (directional or non-directional) according respectively to Annex C for non-directional luminaires and E for directional luminaires, based on illuminance (Lumen) and Power deducted from the Energy Efficacy.

For the calculation of the energy efficiency index (EEI) of a model, its corrected (electric) power  $P_{cor}$  for any control gear losses is compared with its reference power  $P_{ref}$  (based on the luminous flux emitted).

The EEI is calculated as follows and rounded to three decimal places:

$$EEI = \frac{P_{cor}}{P_{ref}}$$

$P_{cor}$  is defined as:

For models *without* external control gear,  $P_{cor}$  is the rated power ( $P_{rated}$ ).

For models *with* external control gear  $P_{cor}$  is the rated power ( $P_{rated}$ ) corrected in accordance with the corrections factors listed below:

The rated power  $P_{rated}$  of the lamps/luminaires is measured at their nominal input voltage.

Correction factors presented in Table 36 apply to moderated the electric power of the luminaires

Correction factor cumulative with those expressed in annex C for indirect lamps and Annex E for direct lamps.

**Table 36: Correction factors applicable to Power of the Luminaires**

| Rated Power of the Luminaire | Correction factor                 |
|------------------------------|-----------------------------------|
| $P_{rated} \leq 6W$          | $P_{cor} = P_{rated} \times 1.17$ |
| $6 W < P_{rated} \leq 15 W$  | $P_{cor} = P_{rated} \times 1.03$ |
| $15 W < P_{rated}$           | $P_{cor} = P_{rated} \times 0.98$ |

$P_{ref}$  is defined as:

$P_{ref}$  is the reference power obtained from the useful luminous flux of the model ( $\Phi_{use}$ ) by the following formulae:

For models with  $\Phi_{use} < 1300$  lumen:  $P_{ref} = 0.88\sqrt{\Phi_{use}} + 0.049 \times \Phi_{use}$

For models with  $\Phi_{use} \geq 1300$  lumen:  $P_{ref} = 0.07341 \times \Phi_{use}$

For non-directional lamps, the useful luminous flux ( $\Phi_{use}$ ) is the total rated luminous flux ( $\Phi$ ).

### M.4 - Classification of Energy Efficiency Index for (integrated) luminaires (EEI)

The energy efficiency rating of luminaires shall be determined on the basis of their energy efficiency index (EEI) as outlined in Table 37.

**Table 37: Energy efficiency classes for luminaires**

| <b>Energy efficiency index (EEI)</b> | <b>Energy efficiency class (Arabic)</b> | <b>Equivalent energy efficiency class (English)</b> |
|--------------------------------------|---|---|
| $EEI \leq 0.11$                      | أ                                       | A   |
| $0.11 < EEI \leq 0.13$               | ب                                       | B   |
| $0.13 < EEI \leq 0.18$               | ج                                       | C   |
| $0.18 < EEI \leq 0.24$               | د                                       | D   |
| $0.24 < EEI \leq 0.50$               | هـ                                      | E   |
| $0.50 < EEI \leq 0.95$               | و                                       | F   |
| $0.95 < EEI \leq 1.75$               | ز                                       | G   |

**Note: For labelling purposes, the Arabic letters shall be used. The equivalent English version is only provided for informational purposes**

## ANNEX N – Criteria for market surveillance

The enforcer may draw a sample of batch of a minimum of twenty (20) lamps or ten (10) luminaires of the same model from the same manufacturer, where possible obtained in equal proportion from four randomly selected sources, unless specified otherwise in Table 38.

The model shall be considered to comply with the requirements laid down in this Standard if:

- The lamps in the batch are accompanied by the required and correct product information,
- All parameters listed in Table 38 are met.

**Table 38: Criteria applying for market surveillance**

| Parameter   | Procedure  |
|---|--|
| Energy efficiency index <sup>1</sup>                | <p>Compliance: The Energy Efficiency Index (EEI) value for lamps in the scope of this Standard shall be less than or equal to the specified values in Tables 2 and 8, when calculated at both rated and average tested power and luminous flux. Furthermore, the average EEI of the sample tested should be not higher than 10% of the rated EEI, and each lamp in the sample should have an EEI value within 10% of the sample's average EEI.</p> <p>For Luminaires the MEPS for Energy Efficacy shall be respected for each product; furthermore, the average efficacy of the sample tested should not be lower 10% of the rated efficacy (in Lumen/W), and each luminaire in the sample should have an efficacy value within 10% of the sample's average efficacy.</p> <p>Non-compliance: otherwise</p> |
| Lamp survival factor at 6000 h (for LED lamps only) | <p>The test shall end</p> <ul style="list-style-type: none"> <li>• when the required number of hours is met, or</li> <li>• when more than two lamps fail, whichever occurs first</li> </ul> <p>Compliance: a maximum of two out of every 20 lamps in the test batch may fail before the required number of hours</p> <p>Non-compliance: otherwise</p>  |
| Number of switching cycles before failure           | <p>The test shall end when the required number of switching cycles is reached, or when more than one out of every 20 lamps in the test batch have reached the end of their life, whichever occurs first</p> <p>Compliance: at least 19 of every 20 lamps in the batch have no failure after the required number of switching cycles is reached</p> <p>Non-compliance: otherwise</p>  |
| Starting time                                       | <p>Compliance: the average starting time of the lamps in the test batch is not higher than the required starting time plus 10 %, and no lamp in the sample batch has a starting time longer than two times the required starting time</p> <p>Non-compliance: otherwise</p>   |
| Lamp warm-up time to 60 % $\Phi$                    | <p>Compliance: the average warm-up time of the lamps in the test batch is not higher than the required warm-up time plus 10%, and no lamp in the sample batch has a warm-up time that exceeds the required warm-up time multiplied by 1.5</p>  |

<sup>1</sup> The tolerances for variation indicated above relate only to the verification of the measured parameters by the authorities and shall not be used by the supplier as an allowed tolerance on the values in the technical documentation to achieve a more efficient energy class. The declared values shall not be more favorable for the supplier than the values reported in the technical documentation.

|  |  |
|--|--|
|  | Non-compliance: otherwise  |
| Premature failure rate   | <p>The test shall end</p> <ul style="list-style-type: none"> <li>• when the required number of hours is met, or</li> <li>• when more than one lamp fails, whichever occurs first.</li> </ul> <p>Compliance: a maximum of one out of every 20 lamps in the test batch fails before the required number of hours</p> <p>Non-compliance: otherwise</p>  |
| Color rendering (Ra)   | <p>Compliance: the average Ra of the lamps in the test batch is not lower than three points below the required value, and no lamp in the test batch has a Ra value that is more than 3,9 points below the required value</p> <p>Non-compliance: otherwise</p>  |
| Lumen maintenance at end of life and rated lifetime (for LED lamps only) | <p>For these purposes, 'end of life' shall mean the point in time when only 50 % of the lamps are projected to survive or when the average lumen maintenance of the batch is projected to fall below 70 %, whichever is projected to occur first</p> <p>Compliance: the lumen maintenance at end of life and the lifetime values obtained by extrapolation from the lamp survival factor and from the average lumen maintenance of the lamps in the test batch at 6000 h are not lower than respectively the lumen maintenance and the rated lifetime values declared in the product information minus 10 %</p> <p>Non-compliance: otherwise</p> |
| Equivalence claims for retrofit lamps according to Annex G               | <p>If only the equivalence claim is verified for compliance, it is sufficient to test 10 lamps, where possible obtained approximately in equal proportion from four randomly selected sources</p> <p>Compliance: the average results of the lamps in the test batch do not vary from the limit, threshold or declared values by more than 10 %</p> <p>Non-compliance: otherwise</p>  |
| Beam angle   | <p>Compliance: the average results of the lamps in the test batch do not vary from the declared beam angle by more than 25 % and the beam angle value of each individual lamp in the test batch does not deviate by more than 25 % of the rated value</p> <p>Non-compliance: otherwise</p>   |
| Peak intensity   | <p>Compliance: the peak intensity of each individual lamp in the test batch is not less than 75 % of the rated intensity of the model</p> <p>Non-compliance: otherwise</p>   |
| Other parameters   | <p>Compliance: the average results of the lamps in the test batch do not vary from the limit, threshold or declared values by more than 10 %.</p> <p>Non-compliance: otherwise</p>   |

If a model within the registered family of product fails, the registration of all models under the same family of product will be automatically canceled.

## ANNEX O – Registration form

### APPLICATION FOR REGISTRATION OR RENEWAL OF REGISTRATION OF LIGHTING PRODUCTS FOR ENERGY EFFICIENCY LABEL USING SLS Portal

1. Applicant is requested to fill a form (**Application Form**) to register the lighting products,
2. Portal validates the request and generates an invoice to the applicant,
3. Applicant receives a payment receipt from the portal after the applicant pays through the SADAD channels,
4. Application sent to SASO Engineers for comments/approval,
5. Application sent back to applicant in case of comments from SASO Engineers, otherwise
6. Application sent to SASO Manager for comments/approval,
7. Application sent back to SASO Engineers in case of comments from SASO Manager, otherwise
8. Application sent to SASO General Manager for comments/approval,
9. Application sent back to SASO Manager in case of comments from SASO General Manager, otherwise
10. Portal generates a certificate with a barcode and notifies applicant by email,
11. Updated SLS features of Search and Reports for Engineers, Manager, General Manager and Admin users.
12. Updated SLS admin with a new configuration page: set fees for request for labels application & allow admin to enable/disable this feature
13. Update SLS Portal - Consumer section - that will be informative to consumers (Arabic Section Only) with the following sections:
  - a. Home page
  - b. Products Catalogues
14. Portal users can be:
  - a. Consumer (No login needed)
  - b. Applicant
  - c. SASO Engineer
  - d. SASO Manager
  - e. SASO General Manager
  - f. Government User (MCI, Custom)
  - g. SEEC User
  - h. Admin



# Application Form

## Section1:

| Field Name         | Field Type     | Data type     | Mandatory / Optional | Descriptions           |
|--------------------|----------------|---------------|----------------------|------------------------|
| Application Number | Auto-generated | Alphanumeric  | Mandatory            | E.g. E01111/2015       |
| Reference standard | Auto-generated | SASO xxxxxxxx | Mandatory            |                        |
| Name of applicant  | Text Field     | Alphanumeric  | Mandatory            | E.g. Name              |
| Business address   | Text Field     | Alphanumeric  | Mandatory            | E.g. Saudi Arabia      |
| P.O Box            | Text Field     | Numeric       | Mandatory            | E.g. 111111            |
| Post code          | Text Field     | Numeric       | Mandatory            | E.g. 111111            |
| Contact person     | Text Field     | Alphanumeric  | Mandatory            | E.g. Name              |
| Position/Title     | Text Field     | Alphanumeric  | Mandatory            | E.g. Manager           |
| Telephone          | Text Field     | Numeric       | Mandatory            | E.g. (966) 55 555 5555 |
| Fax                | Text Field     | Numeric       | Mandatory            | E.g. (966) 55 555 5555 |
| Email              | Text Field     | Alphanumeric  | Mandatory            | E.g. name@example.com  |

## Section2:

| Field Name  | Field Type            | Data type  | Mandatory / Optional | Descriptions  |
|---|-----------------------|--|----------------------|---|
| Name of manufacturer Company as appear in Certificate | Text Field            | Alphanumeric   | Mandatory            | E.g. SASO Manuf.  |
| Brand Name  | Dropdown & Text field | Alphanumeric   | Mandatory            | If not in DD, then user can add Arabic and English Brand Name                         |
| Family group  | Text Field            | Alphanumeric   | Mandatory            | Allow text, number and signs  |
| Model Number covered by the family                    | Text Field            | Alphanumeric   | Mandatory            | Allow text, number and signs<br>Recommended: use IEC 61231 for designing model number |
| Year model(s) first manufactured                      | Text Field            | Numeric  | Mandatory            | Only 4 digits as YYYY   |
| Year model(s) first imported                          | Text Field            | Numeric  | Mandatory            | Only 4 digits as YYYY   |
| Lighting Type   | Dropdown              | <ul style="list-style-type: none"> <li>• Directional</li> <li>• Non-directional</li> </ul> | Mandatory            |   |
| Technology  | Dropdown              | <ul style="list-style-type: none"> <li>• CFLni</li> </ul>                                  |                      |   |

|                          |             |  |                              |                                  |
|--------------------------|-------------|--|------------------------------|----------------------------------|
|                          |             | <ul style="list-style-type: none"> <li>• LFL</li> <li>• Fluorescent (other)</li> <li>• LED other than Part I</li> <li>• Metal halide</li> <li>• High Pressure sodium</li> <li>• Mercury vapor</li> </ul> | Mandatory                    |                                  |
| Control Gear             | Dropdown    | <ul style="list-style-type: none"> <li>• Internal</li> <li>• External</li> <li>• None</li> </ul>   | Mandatory                    |                                  |
| Luminaires               | Dropdown    | <ul style="list-style-type: none"> <li>• Use type</li> </ul>   | Mandatory                    | Text                             |
| Type of cap              | Text Field  | Alphanumeric   | Mandatory                    | E.g. Type                        |
| Lamp dimensions (mm)     | Text Field  | Alphanumeric   | Mandatory                    | E.g. High 222, width 333         |
| Nominal voltage (V)      | Text Field  | Numeric  | Mandatory                    | Allow (12-250) no decimals.      |
| Rated frequency (Hz)     | Text Field  | 60 or 50/60  | Mandatory                    | Uneditable                       |
| Rated Efficiency         | Text field  | Alphanumeric   | Mandatory or auto-calculated | allow 0-100                      |
| Nominal power (W)        | Text Field  | Numeric  | Mandatory                    | Allow (1-99,999) no decimals.    |
| Lifetime (h)             | Text Field  | Numeric  | Mandatory                    | Allow (1-99,999) no decimals.    |
| Rated luminous flux (lm) | Text Field  | Numeric  | Mandatory                    | Allow (1-12000) with 3 decimals. |
| Color temperature (K)    | Text Field  | Numeric  | Mandatory                    | Allow (1-99999) with 3 decimals. |
| Beam angle               | Text fields | Numeric  | Mandatory                    | Degrees                          |

### Section3 (when applicable)

| Field Name                             | Field Type | Data type    | Mandatory / Optional | Descriptions                       |
|--|------------|--------------|----------------------|------------------------------------|
| Test Laboratory Location               | Dropdown   | Alphanumeric | Mandatory            | E.g. Saudi Arabia                  |
| Laboratory                             | Dropdown   | Alphanumeric | Mandatory            | E.g. SASO Lab                      |
| Report date                            | Date       | Numeric      | Mandatory            | DD/MM/YYYY                         |
| Corrected power P <sub>cor</sub> (W)   | Text Field | Numeric      | Mandatory            | Allow (1-99,999) with 3 decimals.  |
| Useful luminous flux $\Phi_{use}$ (lm) | Text Field | Numeric      | Mandatory            | Allow (60-12,500) with 3 decimals. |

|  |            |         |           |                                   |
|--|------------|---------|-----------|-----------------------------------|
| Reference power $P_{ref}$ (W)                                      | Text Field | Numeric | Mandatory | Allow (1-99,999) with 3 decimals. |
| Lamp survival factor at 6000h (%)                                  | Text Field | Numeric | Mandatory | Allow (0-100) with 3 decimals.    |
| Lumen maintenance at 2000h (%)                                     | Text Field | Numeric | Mandatory | Allow (0-100) with 3 decimals.    |
| Lumen maintenance at 6000h (%)                                     | Text Field | Numeric | Mandatory | Allow (0-100) with 3 decimals.    |
| Number of switching cycles before failure                          | Text Field | Numeric | Mandatory | Allow (1-999,999).                |
| Starting time(s)   | Text Field | Numeric | Mandatory |                                   |
| Lamp warm-up time to 60 % total rated luminous flux $\Phi$ (s)     | Text Field | Numeric | Mandatory |                                   |
| Premature failure rate at xxxh (%)                                 | Text Field | Numeric | Mandatory |                                   |
| Lamp displacement factor   | Text Field | Numeric | Mandatory |                                   |
| Color rendering index (%)  | Text Field | Numeric | Mandatory |                                   |
| Efficacy (lm/W)  | Text Field | Numeric | Mandatory |                                   |
| Efficiency   | Text Field | Numeric |           | Allow 2 decimals at least         |
| Annual energy consumption (kWh/yr)                                 | Text Field | Numeric | Mandatory |                                   |
| Energy Efficiency Index (EEI)                                      | Text Field | Numeric | Mandatory |                                   |
| UVA+UVB radiation (mW/klm)   | Text Field | Numeric | Mandatory |                                   |
| UVC radiation (mW/klm)   | Text Field | Numeric | Mandatory |                                   |
| Mercury content (mg)   | Text Field | Numeric | Mandatory | Allow (0-100) with 3 decimals.    |
| Concentration value by weight of Lead (%)                          | Text Field | Numeric | Mandatory |                                   |
| Concentration value by weight of Cadmium (%)                       | Text Field | Numeric | Mandatory |                                   |
| Concentration value by weight of Hexavalent Chromium (%)           | Text Field | Numeric | Mandatory |                                   |
| Concentration value by weight of Polybrominated Biphenyls (%)      | Text Field | Numeric | Mandatory |                                   |
| Concentration value by weight of Polybrominated Diphenyl ether (%) | Text Field | Numeric | Mandatory |                                   |

#### **Section4:**

| Field Name                 | Field Type   | Data type   | Mandatory / Optional | Descriptions                |
|----------------------------|--------------|-------------|----------------------|-----------------------------|
| Test Report <sup>(1)</sup> | Upload Field | File (.PDF) | Mandatory            | Only allow PDF with max 5Mb |

|  |              |             |           |                               |
|--|--------------|-------------|-----------|-------------------------------|
| Declaration Attachment   | Upload Field | File (.PDF) | Optional  | Only allow PDF with max 5Mb   |
| Other Attachment   | Upload Field | File (.PDF) | Optional  | Only allow PDF with max 5Mb   |
| Image  | Upload Field | File (.jpg) | Mandatory | Only allow JPG with max 0.5Mb |
| NamePlate  | Upload Field | File (.jpg) | Mandatory | Only allow JPG with max 0.5Mb |
| <sup>(1)</sup> Note: test report can be separated in different attachments according to the different category of test required: energy efficiency, functionality, long term performances, hazardous content and mercury content as necessary. |              |             |           |                               |