广州力赛计量检测有限公司
GUANGZHOU LISAI METROLOGY & TEST CO. ,LTD.

中国认可
国际互认
校准
CALIBRATION
CNAS L7127

校 准 证 书
CALIBRATION CERTIFICATE

证书编号:
Certificate No. 1GA260731116181-0005

委 托 方: Client	DEKRA Vietnam Testing & Certification Company Limited		
联络信息: Contact Info	8th Floor,, TVL Building, No.153 , Doi Can Street, Doi Can Ward, Ba Dinh District, Ha Noi City, Vietnam		
仪器/样品名称: Description	Test Probe 19 of IEC 61032 5.6 mm Small Finger Probes		
型号/规格: Model/Type	SMT-1219		
制造厂商: Manufacturer	LISUN GROUP		
出厂编号: Serial No.	LS2026029105	管 理 号: Asset No.	/
接收日期: Date of Receipt	2026-07-31	校准日期: Date of Calibration	2026-08-04
发布日期: Issued Date	2026-08-06	建议再校日期: Due Date	2027-08-03
结果: Conclusion	所校准项目合格(Passed at Calibration Items)		

校验码: A26364A181

证书专用章
(Stamp)

批准: Approved by 韦寿前

审核: Inspected by 江挺

校准: Calibrated by 吴娟

总部地址：广东省广州市番禺区石碁镇农科所南街8号
Headquaters Add:No.8.South Street Shi Ji Institute Guangzhou.Guangdong.China
实验室地址：广东省广州市番禺区石碁镇农科所南街8号
Add of Lab:No.8.South Street Shi Ji Institute Guangzhou.Guangdong.China
联系电话(Tel): 020-31134076 投诉电话(CT.): 020-39969860 编码(Post): 511400
传真(Fax): 020-39969986 网址(Web): www.lisaitest.com 邮件(E-mail): cal@lisaitest.com 校验码:A26364A181

我司电子证书具备网站查验、微信公众号查验(二维码扫码查验)、校验码、电子签章、骑缝章多重防伪验证。

1. 本实验室质量管理体系符合ISO/IEC17025标准要求。本实验室出具的数据均可溯源至国际单位制(SI)和社会公用计量标准。
The quality system is in accordance with ISO/IEC17025. All data issued by this laboratory are traceable to International System of Units(SI) and public measurement standards.

2. 本结果仅与受校准/检测样品有效。未经实验室批准，不得部分复制。如有疑问请在15个工作日内反馈。
The results relate only to the items calibrated/tested.This certicate shall not be reproduced except in full,without the written approcal of our laboratory. Please feedback to us within 15 days if you have any question.

3. 本证书编号具有唯一性，后缀若带有"A~Z"的证书为替换证书，自发出后原证书即刻作废。
Each certificate has a unique number,The suffix of "A~Z" will be added to the number as a replacement of the old version. The original certificate will be officially invalid once the new certificate number is issued.

4. 内页中最大允许误差、判定结果仅供参考，其中"P"代表"合格","F"代表"不合格","N/A"代表"不适用"。 使用人员应结合实际测量需求，评估测量不确定度对符合性评定的影响。
MPE & judgement result in the datasheet is only for reference,"P" represents "Pass" and "F" represents "Fail" and "N/A" represents "Not Applicable".Where as users should evaluate the effects of MU of calibration results on conformance assessment by actual measurement.

5. 校准地点、环境条件(Place and environmental condition of the Calibration):
地点(Place)：广州实验室(101精测室)
温度(Temperature)：20.4℃ 相对湿度(Relative Humidity)：58 %

6. 本次校准的技术依据(Reference documents for the Calibration):
JJF(辽)288-2016 外壳对人和设备的防护检验用试具校准规范 Calibration Specification for Protection of person and equipment by enclosures-Probe for verification

7. 计量溯源性声明(Measurement traceability declaration):
被校器具（Description）：Test Probe 19 of IEC 61032 5.6 mm Small Finger Probes； 被校器具（Description） → 钢直尺(Steel ruler) → 三等金属线纹尺(Third-class metal wire ruler) → 华南国家计量测试中心(South China National Center of Metrology)； 被校器具（Description） → 数显卡尺(Digital Caliper) → 卡尺量块/量块(112块)→量块(83块)(Caliper Gauge Block/Gauge block→Measuring block) → 华南国家计量测试中心(South China National Center of Metrology)

8. 本次校准使用的主要标准器具(Main standards of measurement used in the Calibration):

名称/型号 Equipment/Model	出厂编号 Serial No.	证书号/有效期 Cert No./ Due Date	溯源机构 Traceability Institute	技术特征 Technique Character
万能工具显微镜/(200×100)mm Universal tool microscope	3875	CYY202600421 / 2027-04-27	华南国家计量测试中心 (South China National Center of Metrology)	U=0.3μm+5.0×10^{-6}L，k=2
钢直尺/(0~1000)mm Steel ruler	LS-01-0789	3GC25100836874-2350 / 2026-10-30	广州力赛计量检测有限公司 (Guangzhou Lisai Metrology & Test Co. ,Ltd.)	(0~300)mm,MPE=±0.10mm; (300~500)mm,MPE=±0.15mm; (500~1000)mm,MPE=±0.20mm
数显卡尺/(0~300)mm Digital Caliper	K18A305749	3GC25121255935-7509 / 2026-12-24	广州力赛计量检测有限公司 (Guangzhou Lisai Metrology & Test Co. ,Ltd.)	(0~70)mm,MPE=±0.02mm; (>70~200)mm,MPE=±0.03mm; (>200~300)mm,MPE=±0.04mm

校验码：A26364A181

证书编号：1GA260731116181-0005　　校　准　结　果　　第 4 页 / 共 4 页

Certificate No.　　Results of Calibration　　Page 4 of 4

1、外观以及一般性检查：　正常

In view of External and Generality check :　Pass

2、尺寸校准(Dimensional calibration):

2.1、示意图（Diagram）

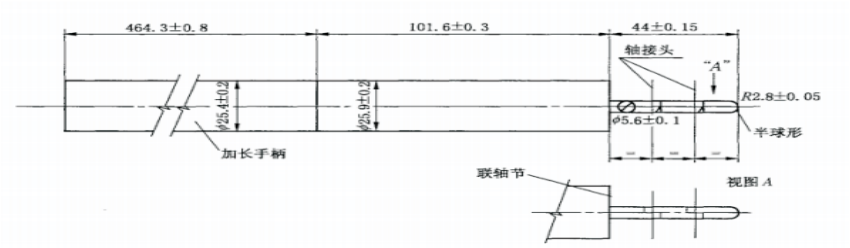


图 13 试具 19

2.2、尺寸校准(Dimensional calibration):

标称值 Nominal (mm)	实测值 Measured (mm)	U (k=2) (mm)	技术要求 Requirement (mm)	结　论 Conclusion (Pass/Fail)
464.3	464.5	0.2	463.50 ~ 465.10	P
101.6	101.47	0.07	101.30 ~ 101.90	P
25.4	25.49	0.04	25.20 ~ 25.60	P
25.9	25.96	0.04	25.70 ~ 26.10	P
44	44.05	0.03	43.85 ~ 44.15	P
5.6	5.57	0.02	5.50 ~ 5.70	P
2.8	2.78	0.01	2.75 ~ 2.85	P

校验码：A26364A181

附：　关于测量结果不确定度的说明：

Appendix:　Directions of uncertainty in the calibration

1.依据(Reference document)

JJF 1059.1-2012 测量不确定度评定与表示

(JJF 1059.1-2012 Evaluation and Expression of Uncertainty in Measurement)

2.本报告给出的扩展不确定度是由合成标准不确定度乘以包含概率约为95%时对应的包含因子k得到的。

The expanded uncertainty given in this report is obtained by multiplying the combined standard uncertainty by the corresponding coverage factor k when the coverage probability of about 95%.

以下空白(The below is blank)