校 准 证 书

CALIBRATION CERTIFICATE

证 书 编 号：
Certificate No. HX261008CC700002

委托方 **Client**	LABORATORIO ELECTROMECANICO Qtest S.A.S.
委托方地址 **Address**	Direccion:Km 17 via las palmas Parque Tecnologico Manantiales,Envigado-Colombia
仪器名称 **Description**	"Go" and "Not Go" gauge for E26 Lamp Cap
型号/规格 **Model/Type**	7006-27E-1
制造厂 **Manufacturer**	LISUN GROUP

出厂编号 **Serial No.**	LS26100802	接收日期 **Receive Date**	2026-10-08
管理编号 **Asset No.**	/	校准日期 **Calibration Date**	2026-10-08
结论 **Conclusion**	所校准项目符合要求Pass	建议复校日期 **Suggested Recal.Date**	2027-10-07

批准 **Approved by**	Lvbo	职务 **Position**	技术负责人 Technical director
核验 **Inspected by**	DangBangquan		
校准 **Calibrated by**	LiXinghu		

（证书专用章）
（Stamp）

计量校准机构备案证书号（Register No.）：粤校备2017B016
Registration Certificate No. of metrological calibration institution：Guangdong school preparation 2017B016
地址：广东省深圳市宝安区燕罗街道塘下涌社区致和路12号广盛大厦201
Address：No.201,Guangsheng Building, No. 12, Zhihe Road,Tangxiayong Community Ercun, Yanluo Street, Bao' an District, Shenzhen, Guangdong,China
电话Tel: 0755-8525 9375
电子邮件Email: hxjljc@yeah.net
传真Fax: 0755-8525 9376
邮编Post Code：518035

证书编号： HX261008CC700002
Certificate No.

校 准 说 明

DIRECTIONS OF CALIBRATION

1. 本实验室的质量管理体系符合ISO/IEC 17025：2017标准的要求。

1.The quality management system of our laboratory conforms to the requirements of ISO/IEC 17025:2017 standard.

2. 本证书的校准结果仅对所校准样品有效。

2.The results of this certificate are only responsible for the item calibrated.

3. 未经本实验室书面批准，不得部分复制校准证书。

3.This certificate shall not be reproduced except in full , without the written approval of our laboratory.

4. 证书内页中“P”代表Pass(合格)，“F”代表Fail（不合格）,“N/A”代表Not Applicable（不适用）。

4.In the datasheet."P" represents "Pass" and "F" represents "Fail" and "N/A" represents"Not Applicable".

5. 本次校准所参照的技术文件及CNAS认可的测量范围。注：备注*号的内容具备技术能力，但未被CNAS认可，详细认可范围请查看CNAS网站中注册编号为CNAS L10016的证书附件。

5.Reference document and accredited scope by CNAS. Note: Note* projects we have technical capability，but isn t accredited by CNAS, Please see the attachment of cerificate NO.L10016 on CNAS website for details.

JJF（浙）1119-2015《家用和类似用途插头插座量规校准规范》、JJF（浙）1119-2015《Calibration Specification for Gauges of Plugs and Socket Outlets for Household and Similar Purposes》

6. 本次校准使用的主要测量标准：

6.Main Standards of Measurement Used in the Calibration

名 称 Description	型号规格/编号 Model / No.	溯源自/证书编号 Trace/Certificate No.	有效期 Valid Date	技术特征 Technique Character
影像测量仪	（200×100）mm	华信计量 /HX260926CC011002	2027-09-21	U=0.6μm+2×10^{-6}L，k=2
数显外径千分尺	（0～25）mm	华信计量 /HX260528CC082003	2027-05-27	MPE：±0.002mm

7. 校准地点、环境条件：

7.Place and environmental conditions of the calibration

地 点： 本公司长度室Our company's length department　　温 度： 23.5 ℃　　相对湿度： 58 %

Place　　Temperature　　Relative Humidity

8. 本证书发布日期： 2026 年 10 月 12 日

8.Date of issue of this certificate 2026 Y 10 M 12 D

证书专用章

证书编号:HX261008CC700002
Certificate No.


校 准 结 果
RESULTS OF CALIBRATION

一、外观及一般工作性能： 符合要求
In view of External and Generality check： Pass

二、尺寸测量(Dimension measurement)：

尺寸代号 NO	标准要求（mm） Requirement	实测结果（mm） Measured	结论（P/F） Conclusion
d	$26.492^{+0.004}_{-0.0}$	26.495	P
U	$0.5^{+0.1}_{-0.1}$	0.495	P
V	$16^{+0.2}_{-0.2}$	16.121	P
α	Nom.45°	45°	P

三、示意图（Diagram）：

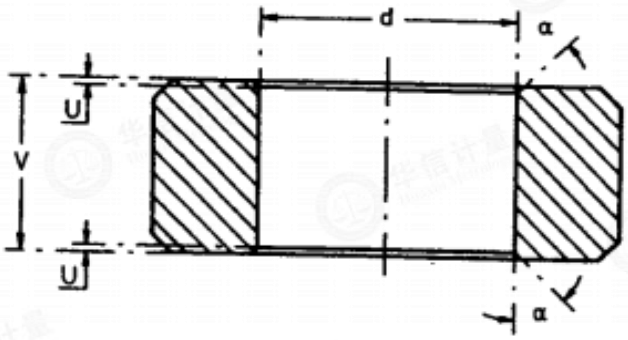

附注：

关于测量结果不确定度的说明.

Directions of measurement uncertainty in the calibration

1.依据《JJF 1059.1-2012 测量不确定度评定与表示》

Reference Document《JJF1059.1-2012 Ecaluation and Expression of Uncertainty in Measurement》

2.本次测量结果的扩展不确定度：

The measurement uncertainties of the calibration

U= 0.006mm， k=2

/

以 下 空 白
The below is blank

深圳华信计量检测科技有限公司 证书专用章